

CMOS/ 1.8V, 2.5V, 3.3V, 5.0V/ 5.0×3.2mm



RoHS Compliant

## Features

- Wide operating voltage range 1.6 to 5.5V
- $\pm 25 \times 10^{-6}$  available
- Highly reliable with seam welding
- Miniature ceramic package
- CMOS output

**Table 1**

| Freq. Code | Tol. $\times 10^{-6}$ | Operating Temperature Range (°C) | Note                          |
|------------|-----------------------|----------------------------------|-------------------------------|
| 0          | $\pm 50$              | -10 to +70                       | Standard specifications       |
| S          | $\pm 30$              |                                  |                               |
| U          | $\pm 25$              | -40 to +85                       | With only certain frequencies |
| F          | $\pm 100$             |                                  |                               |
| G          | $\pm 50$              | -40 to +105                      |                               |
| 6          | $\pm 50$              |                                  |                               |

## How to Order

**KC5032A 25.0000 C M 0 E 00**  
① ② ③ ④ ⑤ ⑥ ⑦

- ① Type (5.0×3.2mm SMD)
- ② Output Frequency
- ③ Output Type (CMOS)
- ④ Supply Voltage (1.8V, 2.5V, 3.3V, 5V Compatible)
- ⑤ Frequency Tolerance (See Table 1)
- ⑥ Symmetry/ INH Function (45/ 55%, Stand-by)
- ⑦ Customer Special Model Suffix (STD Specification is "00")

Packaging (Tape & Reel 1000 pcs / reel)


## Specifications

| Item   | Symbol | Conditions  |   | Min.    | Max.    | Units             |
|--|--------|---|---|---------|---------|-------------------|
| Output Frequency Range                                 | fo     |   |   | 1.8     | 5.0     | MHz               |
| Frequency Tolerance                                    | f_tol  | Initial tolerance, Operating temperature range, Rated power supply voltage change, Load change, Aging (1 year @25°C), Shock and vibration | Op. Temp.: -40 to +85°C                                 | -100    | +100    | ×10 <sup>-6</sup> |
|  |        |   | Op. Temp.: -10 to +70°C/<br>-40 to +85°C/ -40 to +105°C | -50     | +50     |                   |
|  |        |   | Op. Temp.: -10 to +70°C                                 | -30     | +30     |                   |
|  |        |   | Op. Temp.: -10 to +70°C                                 | -25     | +25     |                   |
| Storage Temperature Range                              | T_stg  |   |   | -55     | +125    | °C                |
| Operating Temperature Range                            | T_use  |   |   | -40     | +105    | °C                |
| Max. Supply Voltage                                    | —      |   |   | +0.6    | +6.5    | V                 |
| Supply Voltage   | Vcc    |   |   | +1.6    | +5.5    | V                 |
| Current Consumption (Loaded)<br>(1.6≤Vcc≤2.0V)         | Icc    | 1.8≤fo≤20MHz  |   | —       | 3.5     | mA                |
|  |        | 20<fo≤40MHz   |   | —       | 4.5     |                   |
|  |        | 40<fo≤50MHz   |   | —       | 5.0     |                   |
| 1.8≤fo≤20MHz   |        |   | —   | 4.0     |         |                   |
| 20<fo≤40MHz  |        |   | —   | 5.0     |         |                   |
| 40<fo≤50MHz  |        |   | —   | 6.0     |         |                   |
| 1.8≤fo≤20MHz   |        |   | —   | 5.0     |         |                   |
| 20<fo≤40MHz  |        |   | —   | 6.0     |         |                   |
| 40<fo≤50MHz  |        |   | —   | 7.0     |         |                   |
| 1.8≤fo≤20MHz   |        |   | —   | 7.0     |         |                   |
| 20<fo≤40MHz  |        |   | —   | 8.0     |         |                   |
| 40<fo≤50MHz  |        |   | —   | 9.5     |         |                   |
| Stand-by Current                                       | I_std  |   |   | —       | 10      | μA                |
| Symmetry   | SYM    | @50% Vcc  |   | 45      | 55      | %                 |
| Rise/ Fall Time<br>(10% Vcc to 90% Vcc Maximum Loaded) | tr/ tf | 1.6≤Vcc≤2V  |   | —       | 8       | ns                |
|  |        | 2<Vcc≤2.8V  |   | —       | 7       |                   |
|  |        | 2.8<Vcc≤3.63V   |   | —       | 6       |                   |
|  |        | 4.5≤Vcc≤5.5V  |   | —       | 5       |                   |
| Low Level Output Voltage                               | VOL    | IoL=4mA   |   | —       | 10% Vcc | V                 |
| High Level Output Voltage                              | VOH    | IoH=4mA   |   | 90% Vcc | —       | V                 |
| Output Load  | L_CMOS | 1.6≤Vcc≤5.5V  |   | —       | 15      | pF                |
| Input Voltage Range                                    | VIN    |   |   | 0       | Vcc     | V                 |
| Low Level Input Voltage                                | VIL    |   |   | —       | 30% Vcc | V                 |
| High Level Input Voltage                               | VIH    |   |   | 70% Vcc | —       | V                 |
| Disable Time   | t_dis  |   |   | —       | 150     | ns                |
| Enable Time  | t_ena  |   |   | —       | 5       | ms                |
| Start-up Time  | t_str  | @Minimum operating voltage to be 0 sec.   |   | —       | 10      | ms                |
| 1 Sigma Jitter   | JSigma | Measured with Wavecrest SIA-3000  | 1.8≤fo≤40MHz  | —       | 8       | ps                |
|  |        |   | 40<fo≤50MHz   | —       | 5       |                   |
| Peak to Peak Jitter                                    | JPK-PK | Measured with Wavecrest SIA-3000  | 1.8≤fo≤40MHz  | —       | 80      | ps                |
|  |        |   | 40<fo≤50MHz   | —       | 50      |                   |

Note: All electrical characteristics are defined at the maximum load and operating temperature range.  
Please contact us for inquiry about operating temperature range, available frequencies and other conditions.


## Dimensions

(Unit: mm)

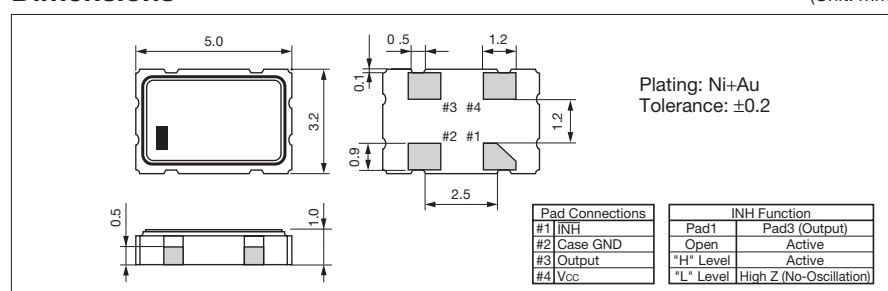

## Recommended Land Pattern

(Unit: mm)

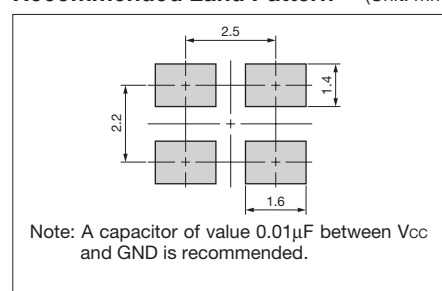

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Kyocera AVX:](#)

[KC5032A27.0000CMGE00](#) [KC5032A16.0000CMGE00](#)