

Radial Leaded Aluminum Conductive Polymer Electrolytic Capacitors

RPF Series



FEATURES

- Long life time, low ESR
- Endurance: 5000 hours at 105°C
- RoHS Compliance and Halogen-free

APPLICATIONS

- System board, graphic cards
- DC/DC Converter, game console, servers



HOW TO ORDER

Product Type
Aluminum

Series Type
See table below

Case Size
See table below

Capacitance Code
µF code: 1st two digits represent significant figures,
3rd digit represents multiplier (number of zeros to follow)

Tolerance
M = ±20%

R

PF

0811

681

M

010

K

-

Lead Type
" " empty = Standard long lead
"C" = Lead cut only
"F" = Lead cut and form


Packaging
K = Ammo Pack
B = Bulk Pack

Rated DC Voltage
006 = 6.3Vdc 050 = 50Vdc
010 = 10Vdc 063 = 63Vdc
016 = 16Vdc 080 = 80Vdc
025 = 25Vdc 100 = 100Vdc
035 = 35Vdc

"L" = Lead cut and bend (Left)
"R" = Lead cut and bend (Right)

CASE DIMENSIONS millimeters (inches)

Code	D'±0.30 (0.012) +0.50 (0.020)	L'±0.50 (0.020) +1.00 (0.039)	d±0.05 (0.002)	F±0.50 (0.020)	Typical Weight (g)	Code	D'±0.30 (0.012) +0.50 (0.020)	L'±0.50 (0.020) +1.00 (0.039)	d±0.05 (0.002)	F±0.50 (0.020)	Typical Weight (g)
0507	5.00 (0.197)	7.00 (0.276)	0.50 (0.020)	2.00 (0.079)	0.28	0811	8.00 (0.315)	11.00 (0.433)	0.60 (0.024)	3.50 (0.138)	0.82
0508	5.00 (0.197)	8.00 (0.315)	0.50 (0.020)	2.00 (0.079)	0.30	0813	8.00 (0.315)	13.00 (0.512)	0.60 (0.024)	3.50 (0.138)	0.91
0509	5.00 (0.197)	9.00 (0.354)	0.50 (0.020)	2.00 (0.079)	0.34	0814	8.00 (0.315)	14.00 (0.551)	0.60 (0.024)	3.50 (0.138)	1.05
0510	5.00 (0.197)	10.00 (0.394)	0.50 (0.020)	2.00 (0.079)	0.38	0816	8.00 (0.315)	16.00 (0.630)	0.60 (0.024)	3.50 (0.138)	1.14
5509	5.50 (0.217)	9.00 (0.354)	0.50 (0.020)	2.50 (0.098)	0.38	1012	10.00 (0.394)	12.00 (0.472)	0.60 (0.024)	5.00 (0.197)	1.22
0605	6.30 (0.248)	5.00 (0.197)	0.50 (0.020)	2.50 (0.098)	0.31	1013	10.00 (0.394)	13.00 (0.512)	0.60 (0.024)	5.00 (0.197)	1.35
0607	6.30 (0.248)	7.00 (0.276)	0.50 (0.020)	2.50 (0.098)	0.37	1014	10.00 (0.394)	14.00 (0.551)	0.60 (0.024)	5.00 (0.197)	1.55
0608	6.30 (0.248)	8.00 (0.315)	0.50 (0.020)	2.50 (0.098)	0.42	1015	10.00 (0.394)	15.00 (0.591)	0.60 (0.024)	5.00 (0.197)	1.62
0609	6.30 (0.248)	9.00 (0.354)	0.50 (0.020)	2.50 (0.098)	0.45	1016	10.00 (0.394)	16.00 (0.630)	0.60 (0.024)	5.00 (0.197)	1.74
0610	6.30 (0.248)	10.00 (0.394)	0.50 (0.020)	2.50 (0.098)	0.54	1017	10.00 (0.394)	17.00 (0.669)	0.60 (0.024)	5.00 (0.197)	1.88
0611	6.30 (0.248)	11.00 (0.433)	0.50 (0.020)	2.50 (0.098)	0.58	1018	10.00 (0.394)	18.00 (0.709)	0.60 (0.024)	5.00 (0.197)	1.93
0809	8.00 (0.315)	9.00 (0.354)	0.60 (0.024)	3.50 (0.138)	0.67						

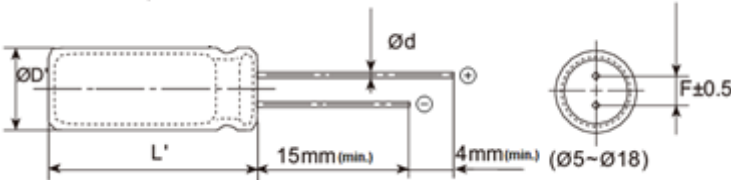

Radial Leaded Aluminum Conductive
Polymer Electrolytic Capacitors
RPF Series




TECHNICAL SPECIFICATIONS

Category Temperature Range:	-55°C to +105°C	
Capacitance Range	At 25°C, 120Hz	4.7μF to 3300μF
Capacitance Tolerance:	At 25°C, 120Hz	±20%
Dissipation Factor (%)	Measurement Frequency: 120Hz at 25°C	Please see the ratings and part number reference table below
Leakage Current:	After 2 minutes at rated working voltage at 25°C*	$I \leq 0.2CV$ or 500μA, whichever is greater

* Note: In the case of an anomalous reading, re-measure the leakage current after following voltage treatment:
Voltage treatment: DC rated voltage to be applied to the capacitors for 120 minutes at 105°C.

MARKING

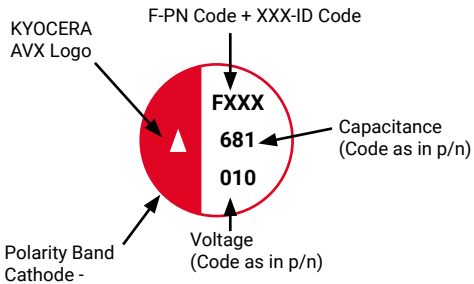

CAPACITANCE AND RATED VOLTAGE RANGE (FIGURES DENOTES CASE SIZE)

Capacitance		Rated Voltage DC (V _R)								
μF	Code	6.3V	10V	16V	25V	35V	50V	63V	80V	100V
4.7	4R7									0608
10	100					0508	0508	0605		0610
15	150									0811
22	220					0509	0607		0610	
33	330					0509	0607	0608	0811	1014
47	470					0607	0608	0609	1012	
56	560						0608	0809		
68	680					0607	0610	0811		
82	820							0811		
100	101			0605		0608 0811	0811	1012	1014	
150	151				0610			1012		
180	181				0809					
220	221	0507	0509 0608		0811	0811 1012	1012	1015		
270	271	0507		0608 0809	0811		1013	1017		
330	331	0508 0605 0608	0608	5509	0811	1012	1015	1018		
390	391	0509								
470	471	0510 0608	0608	0611	0811 1012	1013	1018			
560	561	5509 0608	0610							
680	681	5509 0609 0809	0811	1012 0811		1016				
820	821	0609	0811	0813	0816 1018	1018				
1000	102	0610 0809 0811				1018				
1200	122	0811								
1500	152	0811 1012								
2200	222	0814								
3300	332	1014								

Released ratings

Radial Leaded Aluminum Conductive Polymer Electrolytic Capacitors

RPF Series



RATINGS & PART NUMBER REFERENCE

Part No.	Case Size	Capacitance (μF)	Rated Voltage (V)	DCL Max. (μA)	DF Max. (%)	ESR Max. @100kHz (mΩ)	100kHz RMS Current (mA)
6.3 Volt							
RPF0507221M006*	5007	220	6.3	500	8	22	3100
RPF0507271M006*	0507	270	6.3	500	8	22	3400
RPF0508331M006*	0508	330	6.3	500	8	22	3600
RPF0605331M006*	0605	330	6.3	500	8	27	2800
RPF0608331M006*	0608	330	6.3	500	8	16	3600
RPF0509391M006*	0509	390	6.3	500	8	22	3600
RPF0510471M006*	0510	470	6.3	592	8	22	3800
RPF0608471M006*	0608	470	6.3	592	8	16	3900
RPF5509561M006*	5509	560	6.3	706	8	22	3800
RPF0608561M006*	0608	560	6.3	706	8	22	4300
RPF5509681M006*	5509	680	6.3	857	8	22	4300
RPF0609681M006*	0609	680	6.3	857	8	22	4500
RPF0809681M006*	0809	680	6.3	857	8	22	4100
RPF0609821M006*	0609	820	6.3	1033	8	22	4500
RPF0610102M006*	0610	1000	6.3	1260	8	11	4600
RPF0809102M006*	0809	1000	6.3	1260	8	13	4300
RPF0811102M006*	0811	1000	6.3	1260	8	11	4600
RPF0811122M006*	0811	1200	6.3	1512	8	11	4700
RPF0811152M006*	0811	1500	6.3	1890	8	11	4800
RPF1012152M006*	1012	1500	6.3	1890	8	11	4900
RPF0814222M006*	0814	2200	6.3	2772	8	11	5100
RPF1014332M006*	1014	3300	6.3	4158	8	11	5300
10 Volt							
RPF0509221M010*	0509	220	10	500	12	22	2500
RPF0608221M010*	0608	220	10	500	12	16	2800
RPF0608331M010*	0608	330	10	660	12	22	2900
RPF0608471M010*	0608	470	10	940	12	22	3100
RPF0610561M010*	0610	560	10	1120	12	14	3200
RPF0811681M010*	0811	680	10	1360	12	13	3500
RPF0811821M010*	0811	820	10	1640	12	13	3600
16 Volt							
RPF0605101M016*	0605	100	16	500	12	27	1800
RPF0608271M016*	0608	270	16	864	12	22	2500
RPF0809271M016*	0809	270	16	864	12	22	2600
RPF5509331M016*	5509	330	16	1056	12	22	2600
RPF1012681M016*	1012	680	16	2176	12	13	3200
RPF0813821M016*	0813	820	16	2624	12	12	3100
RPF0611471M016*	0611	470	16	1504	12	16	2800
RPF0811681M016*	0811	680	16	2176	12	16	3000
25 Volt							
RPF0610151M025*	0610	150	25	750	12	22	2500
RPF0809181M025*	0809	180	25	900	12	33	2200
RPF0811221M025*	0811	220	25	1100	12	22	2700
RPF0811271M025*	0811	270	25	1350	12	22	2700
RPF0811331M025*	0811	330	25	1650	12	22	2700
RPF0811471M025*	0811	470	25	2350	12	22	2700
RPF1012471M025*	1012	470	25	2350	12	22	3600
RPF0816821M025*	0816	820	25	4100	12	22	3200
RPF1018821M025*	1018	820	25	4100	12	22	4000
35 Volt							
RPF0508100M035*	0508	10	35	500	12	66	1600
RPF0509220M035*	0509	22	35	500	12	110	1700
RPF0509330M035*	0509	33	35	500	12	55	1800
RPF0607470M035*	0607	47	35	500	12	55	1800
RPF0607680M035*	0607	68	35	500	12	55	1900
RPF0608101M035*	0608	100	35	700	12	55	2100
RPF0811101M035*	0811	100	35	700	12	44	2300
RPF0811221M035*	0811	220	35	1540	12	44	2500
RPF1012221M035*	1012	220	35	1540	12	33	2600

Radial Leaded Aluminum Conductive Polymer Electrolytic Capacitors

RPF Series



Part No.	Case Size	Capacitance (μF)	Rated Voltage (V)	DCL Max. (μA)	DF Max. (%)	ESR Max. @100kHz (mΩ)	100kHz RMS Current (mA)
RPF1012331M035*	1012	330	35	2310	12	33	2700
RPF1013471M035*	1013	470	35	3290	12	22	2800
RPF1016681M035*	1016	680	35	4760	12	22	3000
RPF1018821M035*	1018	820	35	5000	12	22	3100
RPF1018102M035*	1018	1000	35	5000	12	22	3300
50 Volt							
RPF0508100M050*	0508	10	50	500	12	77	1400
RPF0607220M050*	0607	22	50	500	12	44	1700
RPF0607330M050*	0607	33	50	500	12	44	1800
RPF0608470M050*	0608	47	50	500	12	38	1800
RPF0608560M050*	0608	56	50	560	12	38	1900
RPF0610680M050*	0610	68	50	680	12	33	1900
RPF0811101M050*	0811	100	50	1000	12	33	2000
RPF1012221M050*	1012	220	50	2200	12	33	2400
RPF1013271M050*	1013	270	50	2700	12	22	2600
RPF1015331M050*	1015	330	50	3300	12	22	2700
RPF1018471M050*	1018	470	50	4700	12	22	2800
63 Volt							
RPF0605100M063*	0605	10	63	500	12	66	1400
RPF0608330M063*	0608	33	63	500	12	33	1500
RPF0609470M063*	0609	47	63	592	12	33	1700
RPF0809560M063*	0809	56	63	706	12	33	1600
RPF0811680M063*	0811	68	63	857	12	33	1800
RPF0811820M063*	0811	82	63	1033	12	33	1800
RPF1012101M063*	1012	100	63	1260	12	33	1900
RPF1012151M063*	1012	150	63	1890	12	33	2200
RPF1015221M063*	1015	220	63	2772	12	22	2300
RPF1017271M063*	1017	270	63	3402	12	22	2500
RPF1018331M063*	1018	330	63	4158	12	22	2600
80 Volt							
RPF0610220M080*	0610	22	80	500	12	66	1400
RPF0811330M080*	0811	33	80	528	12	38	1500
RPF1012470M080*	1012	47	80	752	12	38	1600
RPF1014101M080*	1014	100	80	1600	12	38	1800
100 Volt							
RPF0608470M100*	0608	4.7	100	500	15	132	1200
RPF0610100M100*	0610	10	100	500	15	55	1300
RPF0811150M100*	0811	15	100	500	15	55	1300
RPF1014330M100*	1014	33	100	600	15	38	1400

* Used to denote packing type: "K" for Ammo Pack or "B" for Bulk.

All technical data relates to an ambient temperature of +25°C. Capacitance and DF are measured at 120Hz, 0.5RMS with DC bias of 2.2 volts. DCL is measured at rated voltage after 2 minutes

QUALIFICATION TABLE

Test	RPF Series (Temperature Range -55°C to +105°C)		
	Condition	Characteristics	
Temperature Characteristics (Impedance Ratio at 100kHz)	Z(+105°C)/Z(+20°C)≤1.25 Z(-55°C)/Z(+20°C)≤1.25		
Endurance	After applying rated voltage for 5000 hours at 105°C, the capacitors shall meet the following requirements.	Visual examination	no visible damage
		ΔC/C	≦ ±20% of the initial limit
		DF:	≦ 150% of the initial specified limit
		ESR:	≦ 150% of the initial specified limit
		DCL:	≦ Initial specified limit
Humidity Test	After subjecting to 90-95%RH for 2000 hours at 60°C without voltage applied, the capacitors shall meet the specified values for the Endurance characteristics listed above.		
Surge Test	After subjecting to 1000 cycles each consisting of charge with the surge voltage specified at normal temperature for 30 seconds through a protective resistor and discharge for 5 minutes 30 seconds, the capacitors shall meet the following requirements.	Visual examination	no visible damage
		ΔC/C	≦ ±20% of the initial limit
		DF:	≦ 150% of the initial specified limit
		ESR:	≦ 150% of the initial specified limit
		DCL:	≦ Initial specified limit



The Important Information/Disclaimer is incorporated in the catalog where these specifications came from or available online at www.kyocera-avx.com/disclaimer/ by reference and should be reviewed in full before placing any order.

TDS-ALUM-0019 | Rev 7

— ALUMINUM CAPACITORS —

Radial Leaded Aluminum Conductive Polymer Electrolytic Capacitors

RPF Series




SOLDERING

1. When soldering with a soldering iron:

- Soldering conditions (temperature and time) should be within the limits prescribed in the catalogs or the product specifications.
- If the terminal spacing of a capacitor does not fit the terminal hole spacing of the PC board, reform the terminals in a manner to minimize a mechanical stress into the body of the capacitor.
- Remove the capacitors from the PC board, after the solder is completely melted, reworking by using a soldering iron minimizes the mechanical stress to the capacitors.
- Do not touch the capacitor body with the hot tip of the soldering iron.

2. Flow Soldering:

- Do not dip the body of a capacitor into the solder bath, only dip the terminals in. The soldering must be done on the reverse side of PC board.
- Do not apply flux to any part of capacitors other than their terminals.
- Make sure the capacitors do not come into contact with any other components while soldering.
- Soldering conditions (preheat, solder temperature and dipping time) should be within the limits prescribed in the picture below.

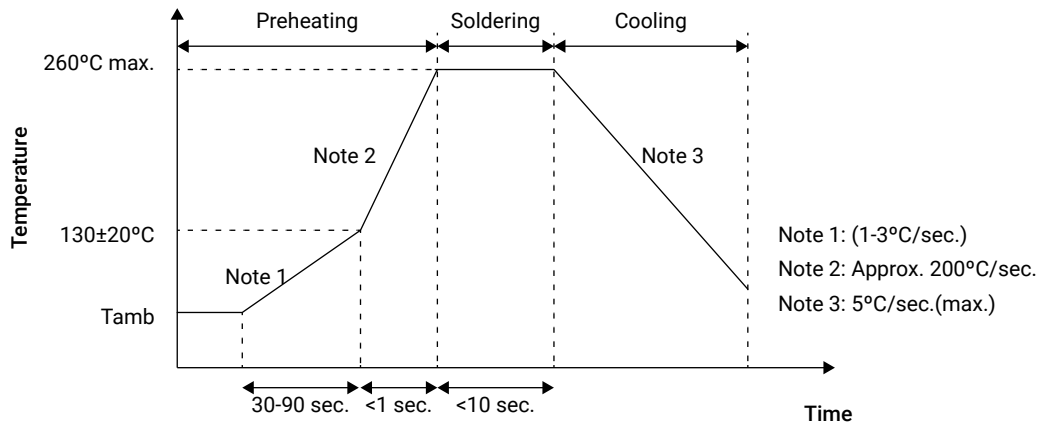

STORAGE

- Store with the temperature range between 5 to 35°C (If between 35 to 85°C , it should be less than three months), and the relative humidity of 75% without direct sunshine and store in the package states if possible.
- It is recommended that you open the bag just before use and use up as early as possible.
- Store the capacitors in places free from water, oil or salt water or in condensation status.
- Never store in any area filled with poisonous gases (including hydrogen sulfide, sulfurous acid, nitrous acid, chlorine and ammonia).
- Store the capacitors in places free from ozone, ultraviolet rays or radiation:

(Radial Lead Type)

Before unseal: within 1 year after delivery

After opening: within 1 month

Radial Leaded Aluminum Conductive Polymer Electrolytic Capacitors


RPF Series




PACKING

Size Code	Bulk Pack					Ammo Pack				
	Bags	Inner Box		Carton		Inner Box		Carton		
		(LxWxH) 290*216*158		(LxWxH) 455*310*350		Quantity	Inner Box Size	Inner Box Quantity	Carton Size	Whole Pieces
	Quantity	Bags Number	Quantity / pcs	Inner Box Number	Quantity / pcs		(LxWxH)		(LxWxH)	
0507	1000	15	15,000	4	60,000	2000	320x230x50	10	485x345x275	20,000
0508	1000	12	12,000	4	48,000	2000	320x230x50	10	485x345x275	20,000
0509	1000	12	12,000	4	48,000	2000	320x230x50	10	485x345x275	20,000
0510	1000	12	12,000	4	48,000	2000	320x230x50	10	485x345x275	20,000
5509	1000	12	12,000	4	48,000	2000	320x230x50	10	485x345x275	20,000
0605	1000	10	10,000	4	40,000	2000	340x290x48	10	600x354x265	20,000
0607	1000	10	10,000	4	40,000	2000	340x290x48	10	600x354x265	20,000
0608	1000	8	8000	4	32,000	2000	340x290x48	10	600x354x265	20,000
0609	1000	8	8000	4	32,000	2000	340x290x48	10	600x354x265	20,000
0610	1000	8	8000	4	32,000	2000	340x290x48	10	600x354x265	20,000
0611	1000	8	8000	4	32,000	2000	340x290x48	10	600x354x265	20,000
0809	500	10	5000	4	20,000	950	320x230x50	6	485x345x275	5700
0811	500	10	5000	4	20,000	950	320x230x50	6	485x345x275	5700
0813	500	10	5000	4	20,000	950	320x230x50	10	485x345x275	9500
0814	500	10	5000	4	20,000	950	320x230x50	6	485x345x275	5700
0816	300	10	3000	4	12,000	950	320x230x55	6	485x345x300	5700
1012	250	10	2500	4	10,000	600	320x230x50	6	485x345x275	3600
1013	250	10	2500	4	10,000	600	320x230x50	6	485x345x275	3600
1014	200	10	2000	4	8000	600	320x230x50	10	485x345x275	6000
1015	200	10	2000	4	8000	600	320x230x55	10	485x345x300	6000
1016	250	10	2500	4	10,000	600	320x230x55	6	485x345x300	3600
1017	250	10	2500	4	10,000	600	320x230x55	10	485x345x300	6000
1018	200	10	2000	4	8000	600	320x230x55	10	485x345x300	6000

AMMO PACKING



BULK PACKING



The Important Information/Disclaimer is incorporated in the catalog where these specifications came from or available online at www.kyocera-avx.com/disclaimer/ by reference and should be reviewed in full before placing any order.

TDS-ALUM-0019 | Rev 7

— ALUMINUM CAPACITORS —


Radial Leaded Aluminum Conductive Polymer Electrolytic Capacitors

RPF Series




TERMINATION TYPE


Letter “ ”: Empty = Standard Long lead.

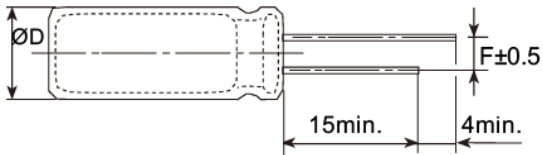


Letter “C”: Lead cut only.

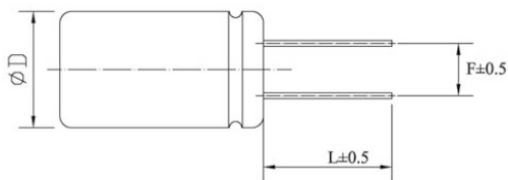


Letter “F”: Lead cut and form.

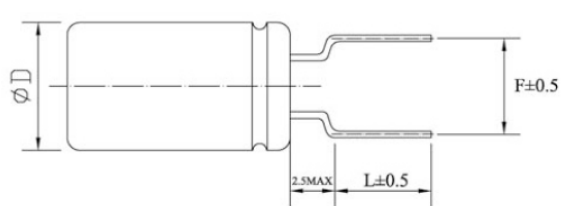

Letter “R”: Lead cut and bend (Right).

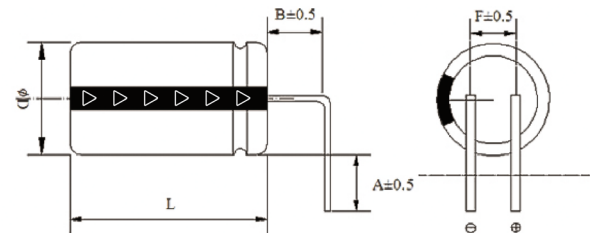

Letter “L”: Lead cut and bend (Left).

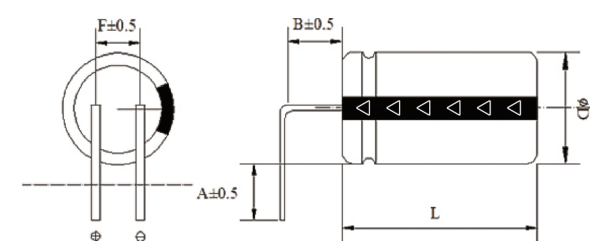

Letter	Termination Type	Dø	4ø	5ø	6.3ø	8ø	10ø	12.5ø	13ø	16ø	18ø
	Standard long lead	F	1.50	2.00	2.50	3.50	5.00	5.00	5.00	7.50	7.50
C	Lead cut only	F	1.50	2.00	2.50	3.50	5.00	5.00	5.00	7.50	7.50
		L	3.60	3.60	3.60	3.60	3.60	3.60	3.60	3.60	3.60
F	Lead cut and form	F	5.00	5.00	5.00	5.00					
		L	3.50	3.50	3.50	3.50					
R / L	Lead cut and bend	F					5.00	5.00	5.00	7.50	7.50
		A					3.50	3.50	3.50	3.50	3.50
		B					2.50	2.50	2.50	2.50	2.50

*All dimensions in mm.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

KYOCERA AVX:

RPF0507221M006K	RPF0507271M006K	RPF0508100M035K	RPF0508100M050K	RPF0508331M006K
RPF0509220M035K	RPF0509221M010K	RPF0509330M035K	RPF0509391M006K	RPF0510471M006K
RPF0605100M063K	RPF0605331M006K	RPF0607220M050K	RPF0607330M050K	RPF0607470M035K
RPF0607680M035K	RPF0608101M035K	RPF0608221M010K	RPF0608271M016K	RPF0608330M063K
RPF0608331M006K	RPF0608331M010K	RPF0608470M050K	RPF0608471M006K	RPF0608471M010K
RPF06084R7M100K	RPF0608560M050K	RPF0608561M006K	RPF0609470M063K	RPF0609681M006K
RPF0609821M006K	RPF0610100M100K	RPF0610102M006K	RPF0610151M025K	RPF0610220M080K
RPF0610561M010K	RPF0610680M050K	RPF0611471M016K	RPF0809102M006K	RPF0809181M025K
RPF0809271M016K	RPF0809560M063K	RPF0809681M006K	RPF0811101M035K	RPF0811101M050K
RPF0811102M006K	RPF0811122M006K	RPF0811150M100K	RPF0811152M006K	RPF0811221M025K
RPF0811221M035K	RPF0811271M025K	RPF0811330M080K	RPF0811331M025K	RPF0811471M025K
RPF0811680M063K	RPF0811681M010K	RPF0811681M016K	RPF0811820M063K	RPF0811821M010K
RPF0813821M016K	RPF0814222M006K	RPF0816821M025K	RPF1012101M063K	RPF1012151M063K
RPF1012152M006K	RPF1012221M035K	RPF1012221M050K	RPF1012331M035K	RPF1012470M080K
RPF1012471M025K	RPF1012681M016K	RPF1013271M050K	RPF1013471M035K	RPF1014101M080K
RPF1014330M100K	RPF1014332M006K	RPF1015221M063K	RPF1015331M050K	RPF1016681M035K
RPF1017271M063K	RPF1018102M035K	RPF1018331M063K	RPF1018471M050K	RPF1018821M025K
RPF1018821M035K	RPF5509331M016K	RPF5509561M006K	RPF5509681M006K	