*This catalog is for PAH200H model.

PAH SERIES

Single / Dual Output 50-450W



Features

- Half brick industry standard size (61×12.7×57.9 mm)
- High power density (industry-leading level in 450W full brick model)
- High efficiency: 92% (PAH450S48)
- Wide range of operating temperatures (Baseplate temperature: -40 to +100°C except PAH 200H)
- Wide variation
- Built-in capacitor: Ceramic capacitor only (high reliabilitv)

(Organic polymer semiconductor capacitor is also used for output smoothing in PAH200H/PAH75D.)

Applications

сом






Α

SEM

Model naming method PAH 75 D 48 - 5033 / [_ Option 24 · 24Vin 48: 48Vin



Conformity to RoHS Directive

This means that, in conformity with EU Directive 2002/95/ EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.

PAH-S24	(DC24Vin)				PAH-S48 (DC48Vin)①				
Output		300W 350W		300W		350W		450W		
Voltage	Output Current	Model								
12V	25A	PAH300S24-12	—	—	25A	PAH300S48-12	29.2A	PAH350S48-12	-	-
28V	11A	PAH300S24-28	12.5A	PAH350S24-28	11A	PAH300S48-28	12.5A	PAH350S48-28	16A	PAH450S48-28
48V	—	—	7.3A	PAH350S24-48	-	_	-	_	4.9A	PAH450S48-48

PAH-S48	(DC48Vin)	2)									
Output		50W		75W		100W 150W			200W		
Voltage	Output Current	Model	Output Current	Model	Output Current	Model	Output Current	Model	Output Current	Model	
1.2V	—	—	-	—	—	—	—	_	70A	PAH200H48-1R2	
1.5V	-	—	-	—	-	-	—	-	70A	PAH200H48-1R5	
1.8V	—	—	—	—	—	_	—	_	70A	PAH200H48-1R8	
2.5V	11.7A	PAH50S48-2.5	17.5A	PAH75S48-2.5	23.4A	PAH100S48-2.5	35A	PAH150S48-2.5	70A	PAH200H48-2R5	
3.3V	11.7A	PAH50S48-3.3	17.5A	PAH75S48-3.3	23.4A	PAH100S48-3.3	35A	PAH150S48-3.3	60A	PAH200H48-3R3	
5V	10.0A	PAH50S48-5	15.0A	PAH75S48-5	20.0A	PAH100S48-5	30A	PAH150S48-5	—	_	
12V	4.2A	PAH50S48-12	6.3A	PAH75S48-12	8.4A	PAH100S48-12	12.5A	PAH150S48-12	16.7A	PAH200S48-12	
15V	3.4A	PAH50S48-15	5A	PAH75S48-15	6.7A	PAH100S48-15	10A	PAH150S48-15	13.4A	PAH200S48-15	
24V	2.1A	PAH50S48-24	3.2A	PAH75S48-24	4.2A	PAH100S48-24	6.3A	PAH150S48-24	8.4A	PAH200S48-24	
28V	1.8A	PAH50S48-28	2.7A	PAH75S48-28	3.6A	PAH100S48-28	5.4A	PAH150S48-28	7.2A	PAH200S48-28	
48V	—	—	—	—	—	—	3.2A	PAH150S48-48	—	—	

PAH75D (Dual Output)

	Output		75W											
	Voltage	Outp	ut Current / Model	Outp	Output Current / Model		Output Current / Model							
Γ	1.8V	—		—		15.0A		15.0A		—		-		
Γ	2.5V	15A	PAH75D24-3325	—		15.0A		_	PAH75D483-3118	15.0A		-	PAH75D48-5033	
	3.3V	15A	FAIT/JD24-0020	15A		—		15.0A	FAIT/30403-3110	15.0A		15.0A	FAI173D40-3033	
	5V	—		15A		—		—		—		15.0A		

PAH

web190415 B-143

*) PAH200H Serise is without cover.

PAH200H

PAH200H Specifications

ITEMS/	UNITS	МО	DEL	PAH200H48-1R2	PAH200H48-1R5	PAH200H48-1R8	PAH200H48-2R5	PAH200H48-3R3	
	Voltage Range	(*6)	V		DC36	- 76 (100VDC, 10) D0ms)	L	
Input	Efficiency (typ)	(*1)	%	82	84	87	88	90	
	Current (typ)	(*1)	Α	2.19	2.67	3.08	4.23	4.68	
	Nominal Voltage		VDC	1.2	1.5	1.8	2.5	3.3	
	Maximum Current		Α		7	0		60	
	Maximum Power		W	84	105	126	175	198	
	Voltage Setting Accuracy	(*1)	%			±1			
Output	Maximum Line Regulation	(*2)	mV			10			
	Maximum Load Regulation	n(*3)	mV			10			
	Temperature Coefficient				L	ess than 0.02%/°	C		
	Maximum Ripple & Noise	(*8)	mVp-p			100			
	Voltage Adjustable Range	e(*8)			+/-15%				
	Over Current Protection	(*4)		105% - 140% (Option available : Refer to option table)					
	Over Voltage Protection	(*5)		120% - 140% (Option available : Refer to option table)					
Function	Remote Sensing	(*6)				Possible			
Function	Remote ON/OFF Control				Possible (Option	n available : Refe	r to option table)		
	Parallel Operation	(*6)				-			
	Series Operation	(*6)		Possible					
	Operating Temperature (*7) °C					Ta= -40 to +85			
	Storage Temperature		°C	-40 to +100					
	Operating Humidity		%RH	5 - 95 (No dewdrop)					
Environment	Storage Humidity		%RH	5 - 95 (No dewdrop)					
Environment	Vibration			At no operating, 10-55Hz (sweep for 1min.)					
	VIDIATION			Amplitude 0.825mm constant (maximum 49.0m/s²) X, Y, Z 1 hour each					
	Shock					196.1m/s²			
	Cooling		Convection cooled / Forced air cooled						
laslation	Withstand Voltage				Input-O	utput : 1.5kVDC f	or 1min		
Isolation	Isolation Resistance			More than 100M Ω at 25°C and 70%RH Input-Output500VDC					
Standards	Safety Standards			Appro	oved by UL60950	-1, CSA C22.2 No	0.60950-1, EN60	950-1.	
Maaharia-	Weight (typ)		g		90				
Mechanical	Size (W x H x D)		mm		61 x 10.2 x 5	57.9 (Refer to outl	ine drawing)		

(*1) At 48VDC, maximum output current, air velocity = 2m/s and Ta = +25°C.

(*2) 36 - 76VDC, constant load.

(*3) No load - full load, constant input voltage.

(*4) Constant current limiting. (The unit automatically shutdown when left in OCP condition with the output voltage less than the LVP level.) Auto restart option available.


(*5) Inverter shutdown method, manual reset. Auto restart option available.

(*6) Refer to instruction manual.

(*7) Refer to derating curve and instruction manual.

(*8) External components are needed for operation. (Refer to basic connection. and instruction manual.)

Basic connections

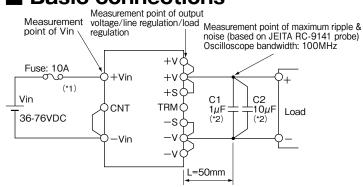

Option table:

option table.									
Option	ON/OFF Logic	OVP, OCP							
Standard	Negative (Short: ON,	Shut-down (ON/OFF control reset or manual reset)							
/V	Open: OFF)	Auto restart							
/P	Pogitive	Shut down (ON/OFF control reset or manual reset)							
/PV	(Short: OFF, Open: ON)	Auto restart							


(*1) 1: The PAH200H series is not equipped with a fuse. Be sure to set a fast-blow fuse for the enhancement of safety and to get approval for safety standards. When using multiple units of the PAH200H series, set a fuse for each unit.

(*2) C1: 1µF ceramic capacitor

C2: 10µF electrolytic capacitor or tantalum capacitor

Outline Drawing

[PAH200H]

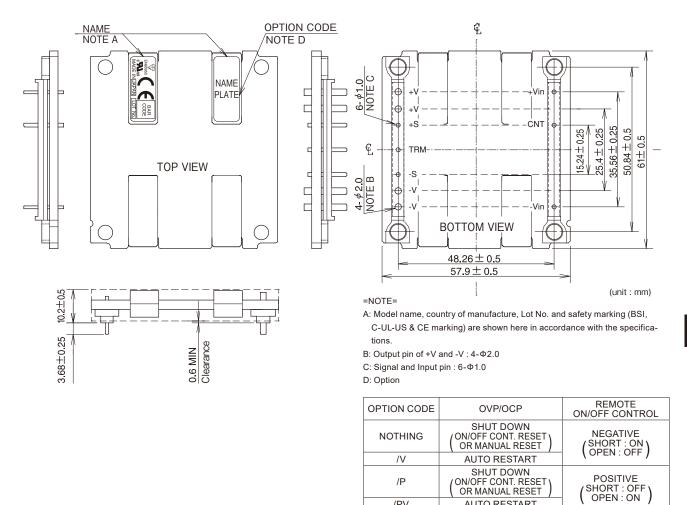


Output Derating

/PV

Output derating by ambient temperature

Please refer to instruction manual.

Output derating by PCB temperature




When using with different measurement conditions from output derating by ambient temperature, use output derating by PCB temperature.


AUTO RESTART

PCB temperature is decided by temperature of the component surface below. Measurement of PCB temperature is recommended to ensure the module to operate within the derating curve.

Measuring point of PCB temperature




Block Diagram

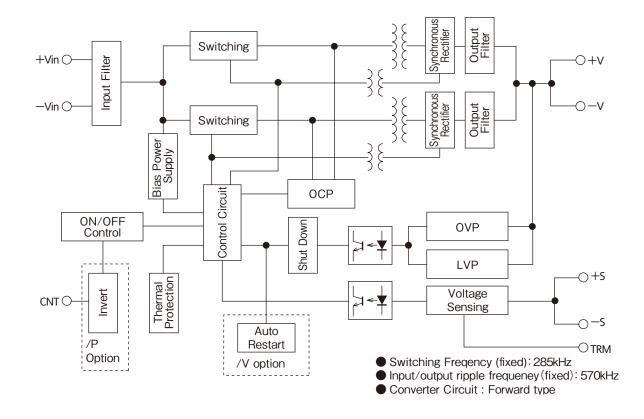

Sequence Time Chart

(For standard model with latch type OVP and OCP, negative logic for ON/OFF control)

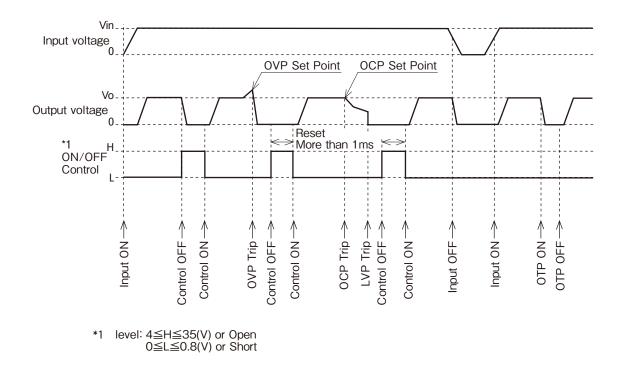

PAH200H

TDK·Lambda

PAH200H Instruction Manual

- PAH300S24, 350S24 Instruction Manual B-169Page
- PAH50S48 ~ 200S48 Instruction Manual 8 177Page
- PAH300S48, 350S48 Instruction Manual (B-182Page
 - PAH450S48 Instruction Manual (B-190Page
 - PAH75D Instruction Manual ((😻 B-199Page

Before Using This Power Module

Be sure to take note of precautions and warnings indicated in this manual when using this product. Improper usage may lead to electric shock or fire. Be sure to read this instruction manual thoroughly before using this product.

▲ Caution

- There are high voltage and high temperature components within this product. Refrain from disassembling this product or touching its internal components as this may lead to electric shock or burned.
- When the unit is operating, keep your hands and face away from the unit. You may get injured by accident.
- Confirm connections to input/output terminals and signal terminals are correct as indicated in the instruction manual.
- Attach a fast blow type external fuse to each module to ensure safety operation and compliance to each safety standard approval.
- This power module is designed for professional installation within the end user equipment.
- Use isolated voltage by reinforced or double insulation as

input power source.

• Do not inject abnormal voltage to output terminal and signal terminal from the outside.


The injection of reverse voltage or over voltage exceeding nominal output voltage to output terminals might cause Damage to internal output capacitor (Functional Polymerized Capacitor)

- The application circuits and their parameter are for reference only. Be sure to verify effectiveness of application circuits and their parameters before finalizing circuit design.
- The information in this document is subject to change without prior notice. For actual design-in, please refer to the latest publications of data sheet, etc., for the most up-to-date specifications of the unit.
- No part of this document may be copied or reproduced in any for, or by any mean without prior written consent of Densei-Lambda.

Note : CE Marking

CE Marking, when applied to a product covered by instruction manual, indicates compliance with the low voltage directive which complies with EN60950

1. Terminal Explanation



Input and Output Terminal Configurations(Bottom View)

[Input terminal] -Vin: -Input Terminal CNT: ON/OFF Control Terminal

+Vin: +Input Terminal

[Output terminal]

- -V: -Output Terminal
- -S: -Remote Sensing Terminal
- TRM: Output Voltage Trimming Terminal
- +S: +Remote Sensing Terminal
- +V: +Output Terminal

Please ensure good connectivity to minimize the connection resistance for terminal +Vin, -Vin, +V and -V.

2. Explanation on Specifications

Input Voltage Range

Input voltage Range for PAH200H48 Series is indicated below.

Input Voltage Range: 36 - 76VDC Maximum Applied Surge Voltage: 100VDC, 100ms

Basically, ripple voltage (Vrpl) which results from rectification and filtering of commercial AC line is included within the input voltage as shown in Fig.1-1.

Ripple voltage must be limited within the voltage described below.

Allowable input ripple voltage: 4Vp-p

When this value is exceeded, the output ripple voltage becomes large.

Note that abrupt input voltage change may cause the output voltage to fluctuate transitionally.

Also, input voltage waveform peak value must not exceed above input voltage range.




Fig.1-1 Input Ripple Voltage




Fig.1-2 Basic Connection

(Standard Model: Negative Logic type for ON/OFF Control) Input Fuse

PAH200H48 Series module is not internally fused. To ensure safe operation and to receive each Safety Standard approval, please connect an external fuse (fast-blow type) as shown in Fig.1-2.

Fuse must be connected to the +Vin side if -Vin side is used as a ground, or fuse must be connected to -Vin side if +Vin side is used as a ground.

Recommended input fuse current rating: PAH200H48: 10A

C1: 1 µ F, C2: 10 µ F

To reduce spike noise voltage at the output, connect 1μ F ceramic capacitor and 10μ F electrolytic capacitor or tantalum capacitor between +V and -V within 50mm distance from the output terminals.

Also, take note that output spike noise voltage could vary according to PCB wiring design.

Maximum capacitance of electrolytic capacitor that can be connected between +V and –V, is total $10,000\mu$ F.

C3:

Input capacitor C3 is recommended to stabilize to module when the module is powered from a high impedance source.

Select the electrolytic capacitor with low ESR and sufficient allowable ripple current.

Verify actual ripple current value by actual measurement.

Recommended capacitor value: 100µF and above (voltage rating 100V or above)

Note) 1. Use low impedance electrolytic capacitor with excellent temperature characteristics.

(Nippon Chemicon LXV Series or equivalent)

- 2. When input line inductance becomes excessively high due to insertion of choke coil operation of the power module could become unstable. For this case, increase C3 value more than the value indicated above.
- When ambient temperature becomes lower than -20°C, connect two capacitors indicate above in parallel

C4:

When switches or connectors are used between input source and PAH200H48 Series input terminals, impulse surge voltage is generated due to input throw-in by switch on/off or due to inserting/removing of power module from the active line. For this case, connect an additional electrolytic capacitor C4 as shown in fig.1-3 and fig.1-4.

Recommended Capacitor: 100µF and above (Voltage Rating 100V or above)

Also, in-rush current flows at line throw-in.

Therefore, be sure to verify capability of switch or fuse to withstand l^2t at line throw-in.




Fig.1-3 Input filter (C4) with Switch




Fig.1-4 Input Filter with Switch when Plural Power

Reverse input connections

Reverse input polarity would cause module damage.

PAH200H

For cases where reverse connections are possible, connect a protective diode and fuse. Use protective diode with higher voltage rating than the input voltage, and with higher surge current rating than the fuse.




Fig.1-5 Protection for Reversed Input Connection

2 Output Voltage Adjustment Range

Output voltage could be adjusted within the range described below by external resister or variable resistor. However, take note that OVP might trigger when output voltage adjustment exceeds the ranges indicated below.

Output Voltage Adjustment Range

3.3V: -15% - +15% of nominal output Voltage

1.8V, 2.5V: -20% - +10% of nominal output Voltage When increasing the output voltage reduce the output cur-

rent accordingly so as not to exceed the maximum output power.

For 3.3V output model, take note that when output voltage is increased, input voltage range is limited as shown in fig.2-1.

Also, when output voltage is decreased under output adjustment range, output voltage will shut off.

Remote sensing is possible even when output voltage is varied. For details on remote sensing function, please refer to "9. Remote Sensing"




Fig.2-1 Limit of Input Voltage

Output Voltage Adjustment by external resistor or by variable resistor

(1) In case of adjusting output voltage lower

- (1-1) Available maximum output current = rated output current
- (1-2) Connect an external resistor Radj(down) between the TRM terminal and –S terminal.




Fig.2-2 Connection for output voltage trim down (1)

 $(1\mathchar`-3)\mbox{ Equation}$ of external resistor and output voltage.

(1R8, 2R5, 3R3)
Radj (down) =
$$\left(\frac{100\%}{\Delta\%} - 2\right)$$
 [kΩ]
(1R5)

Radj(down) = $\left[\frac{2.67 \times 100\%}{\Delta\%} - 3.67\right]$ [1 (1R2) Radj(down) = $\left(\frac{1.67 \times 100\%}{\Delta\%} - 2.67\right]$ [1

Radj (down) : Value of external resistor

Below graph is relation $\Delta\%$ and value of external resistor.




Fig.2-3 Δ (%) vs. Radj(down) (1)

- (2) In case of adjusting output voltage higher
 - (2-1) Allowable maximum output current = value of output power ÷ output voltage (reduce maximum output current in specification.)
 - (2-2) Connect an external resistor Radj (up) between TRM terminal and +S terminal




Fig.2-4 Connection for output voltage trim up (2)

(2-3) Equation of external resistor and output voltage (1R8, 2R5, 3R3)

$$Radj(up) = \left(\frac{Vo (100\% + \Delta\%)}{1.225 \times \Delta\%} - \frac{100\% + 2 \times \Delta\%}{\Delta\%}\right) [k\Omega]$$
(1R5)

$$\operatorname{Radj}(\operatorname{up}) = \left(\frac{1.26 \times 100\%}{\Delta\%} + 0.2\right) [k\Omega]$$

R2)
Radj(up)=
$$\left(\frac{0.78 \times 100\%}{\Delta\%} - 0.22\right)$$
[kΩ]


(1

Vo: nominal output value of module

- Radj (up) : external adjustment resistor
- $\Delta \ (\%): \qquad \mbox{Output voltage change rate against nominal} \\ \mbox{output voltage}$
- Ex.) To adjust to 3.63V for 3.3V nominal model, setting level is +10% , therefore $\Delta(\%$) = 10% .

Below graph is relation $\Delta(\%)$ and value of external resistor.

PAH200H

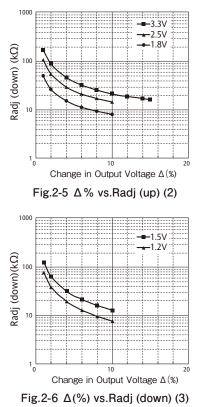

(3) To adjust output voltage for whole range Resistor values, as well as, connecting methods for external resistor (R1) and external variable resistor (VR) are described below.

	1.8V	2.5V	3.3V
R1	2.2k	1k	2.2k
VR	1k	2k	2k

unit: [Ω]

Table 2-3 Value of External Resistor and Variable Resistor $\begin{bmatrix} Vo & -20\% , +10\% & (1.8V, 2.5V) \\ Vo & \pm15\% & (3.3V) \end{bmatrix}$

	1.8V	2.5V	3.3V
R1	5.6k	3.3k	5.6k
VR	500	1k	1k

unit: [Ω]

Table 2-4 Value of External Resistor and Variable Resistor (±10% Variable)

- R1: ±5% Tolerance
- VR: ±20% Tolerance
 - with end resistance below 1%




Fig.2-6 Example connection of external resistor

3 Maximum Ripple and Noise

(1) Measurement based on JEITA RC-9141 Measure according to the specified methods (Fig.3-1) based on JEITA RC-9141(Clause 7.12 and 7.13) which is described in the following. Connect capacitors (C1: ceramic capacitor 1μ F, C2: tantalum capacitor 10μ F) at 50mm distance from the output terminals. Measure at ceramic capacitor (C1) leads as shown in fig.3-1 using coaxial cable with JEITA attachment. Use oscilloscope with 100MHz frequency bandwidth or equivalent.




Fig.3-1 Measurement of Maximum Output Ripple & Noise Based on JEITA RC-9141

(2) Measurement using coaxial cable

Measure according to Fig.3-2. Connect capacitors (C1: ceramic capacitor 1μ F, C2: tantalum capacitor 10μ F) at 50mm distance from the output terminals. Measure at ceramic capacitor (C1) leads using coaxial cable. Use oscilloscope with 20MHz frequency bandwidth or equivalent.




Fig.3-2 Measurement of Maximum Output Ripple & Noise Using coaxial cable

Take note that output ripple voltage and output spike noise may vary depending on PCB wiring design. Generally output ripple voltage and output spike noise can be reduced by increasing value of external capacitor.

4 Maximum Line Regulation

Maximum line regulation is the maximum value of output voltage change when input voltage is gradually varied within specified input voltage range. The measurement point for the input and output voltage are \pm Vin and \pm S (sense point) respectively.

5 Maximum Load Regulation

Maximum value of output voltage change when output current is gradually varied within specified output current range. The measurement point for the input and output voltage are \pm Vin and \pm S (sense point) respectively. When using at dynamic load mode, audible noise may be heard from the power module and output voltage fluctuation might increase.

6 Over Current Protection (OCP)

This power module has built-in OCP function.

Output will recover when short circuit or overload conditions are released. OCP setting value is fixed and therefore, can not be externally adjusted. Also, take note, when

TDK·Lambda

РАН200н

output voltage drops down below lower side of adjustment range for 20ms - 50ms by output short circuit or over load conditions, output might be shut down.

Output can be recovered by manual reset of the control ON/OFF terminal or by turning input line off and then turning it on again.

2 Over Voltage Protection (OVP)

This power module has built-in OVP function.

OVP set point is relative to the rated output voltage value. When output voltage exceeds OVP set point, output voltage shuts down. OVP set point is fixed and therefore can not be changed. When OVP is triggered, output can be recovered by turning input line off and then turning it on again after lowering the input voltage below the voltage value indicated below or by manual reset of the control ON/OFF terminal.

Input voltage for OVP reset: 24VDC and below

/V Option (automatic recovery)

The /V optional model will re-start with delay of 100ms \sim 400ms after shutdown by OCP or OVP triggering. When over voltage and over current are removed, output will recover normally.

Verifying OVP function shall be done by increasing output voltage with external resistor. For verifying OVP function, avoid applying external voltage to output terminal because this will cause power module damage.

Over Thermal Protection (OTP)

This power module has built-in OTP function. This function operates and shuts down the output when temperature of the power module rises abnormally. Take note that OTP will operate again unless the cause of abnormal heat of the power module is eliminated.

For the details of OTP, refer to the clause of "Mounting Method and Thermal Condition"

Remote Sensing (+S, -S Terminal)

Remote sensing terminal is provided to compensate for voltage drop across the wiring from the power module output terminal to the load input terminal.

When remote sensing function is not used (local sensing), short +S terminal to +V terminal and, -S terminal to -V terminal.

Fig.9-1indicates connections when the remote sensing terminal is used. For optimum operations, connect electrolytic capacitor as large capacity as possible (within 10,000 μ F) between +V and -V terminal, as well as across the load terminals. Take note that voltage compensation range for line drop (voltage drop due to wiring) should be kept such that output voltage at the output terminals is within output voltage range and the maximum power doesn't exceed Use shielded wire, twist pair, or parallel pattern to reduce noise effect. When the remote sensing terminal is used, if the load wiring impedance is large, output power may disrupt the stability. To reduce the load wiring impedance, wiring should be thick and short as much

as possible. When using the lead wiring, the wire should be twist pair, or when using the pattern, use the pattern layout as shown in fig.9-3 to reduce the impedance as small as possible.




Fig.9-1 Remote Sensing in Use




Fig.9-2 Remote Sensing Not in Use (Local Sensing)





Fig.9-3 Example of Load Wiring Pattern Layout in using the double-sided PCB

ON/OFF Control (CNT Terminal)

Without turning the input supply on and off, the output can be enabled and disabled using this function. This function also can be used for output sequence of plural modules. There are two kind of logic control, negative logic control and positive logic control, depend on the option selected. ON/OFF control circuit is on the primary side (the input side), CNT Terminal pin. For secondary control, isolation can be achieved through the use of a opto coupler or relay.

	Logic	CNT Terminal Level to -Vin Terminal	Output status
Standard	Nogotivo Logio	H Level (4V≦H≦35V) or Open	OFF
[/V option]	INEGative Logic	H Level (4V≦H≦35V) or Open L Level (0V≦H≦0.8V) or Short	ON
[/P option]	Positive Logic	H Level (4V≦H≦35V) or Open	ON
[/PV option]	FUSITIVE LOBIC	L Level (0V≦H≦0.8V) or Short	OFF

- *When control function is not used for the Standard, CNT terminal is shorted to -Vin terminal.
- *When using long wiring, for prevention of noise, attach a 0.1μF capacitor between CNT Terminal and -Vin terminal.
- *At L level, maximum source current from CNT terminal to -Vin terminal is 0.5mA
- *The maximum CNT Terminal voltage is 35V.
- (1) Output ON/OFF control



(2) Secondary (output side) control




Fig.10-1 CNT Connection

Parallel Operation

Parallel Operation can not be used.

Series Operation

Series Operation is possible for PAH200H Series.

For the number of maximum series connection, please contact us

(A) Series Operation in High Output Voltage

When Series Operation is used to obtain Higher Output Voltage, a bypass diode is needed to prevent the reverse voltage (refer Fig12-1.) The selection guide for this bypass diode is described below :

Condition of selection, bypass diode D1, D2

- Peak Repeated Reverse Voltage VRRM≧duplicate of nominal output voltage of the power supply.
- Average output current lo≧duplicate of nominal output current of the power supply.
- 3. Forward voltage

VF≧The lowest

(schottky barrier diode and equivalent)

Output reverse maximum applied voltage: 0.6VDC and below




Fig.12-1 Series Operation for High Output Voltage

(B) \pm Output Series Operation

When +load and -load is completely separated the bypass diode is not required.




Fig.12-2 \pm Output Series Operation

Operating Ambient Temperature

According to ambient temperature, output load should derated accordingly (refer to Mounting Method & Terminal Condition). There is no restriction on mounting direction but there should be enough consideration for airflow so that heat does not accumulate around the power module vicinity.

Determine external components configuration and mounting direction on PCB such that air could flow through power module at forced air cooling or convection cooling. For better reliability, derating of ambient temperature is recommended. For details on derating, refer to "Mounting Method & Thermal Condition".

Operatin Ambient Humidity

Take note that moisture could lead to power module abnormal operation or damage.

Storage Ambient Temperature

Abrupt temperature change would cause condensation built-up that leads to poor solderability of terminals of the power supply.

Storage Ambient Humidity

High temperature and humidity can cause the terminals on the module to oxidize. The quality of the solder will become worse.

Cooling Method


Forced air cooling is recommended. Convection cooling is also possible. For the details of derating, refer to "Mounting Method and Thermal condition"

Ambient Temperature vs. Output Voltage Drift

Temperature coefficient is defined as the rate of voltage change when ambient temperature is changed during operation.

Withstand Voltage


This power module is designed to have a withstand voltage of 1.5kVDC between input and output. When conducting withstand voltage test during incoming inspection, be sure to apply DC voltage. Also, set the current limit value of the withstand voltage testing equipment to 10mA. Be sure to avoid conducting test with AC voltage because this would cause power module damage. Furthermore, avoid throw in or shut off of the testing equipment when applying or when shutting down the test voltage. Instead, gradually increase or decrease the applied voltage. Take note especially not to use the timer of the test equipment because when the timer switches the applied voltage off, impulse voltage which has several times the magnitude of the applied voltage is generated causing damage to the power module. Short the output side as shown in fig.19-1.



1.5kVAC 1minute (20mA) Fig.19-1 Withstand Voltage Test for Input-Output

1 Insulation Resistance

Use DC insulation tester (MAX 500V) between output and input. Insulation resistance value is $100M\Omega$ and above at 500VDC applied voltage. Make sure that during testing, the isolation testers does not produce a high pulse when the applied voltage is varied. Ensure that the tester is fully discharged after the test.



100M Ω and above at 500VDC Fig.20-1 Isolated test

2 Vibration

Vibration of power module is defined in case of mounting on PCB.

🗷 Shock

Value for the conditions of out shipping and packing.

3. Mounting Method and Thermal Condition

PAH

Output Derating

(1) Output Derating by ambient temperature

There is no restriction on mounting direction but there should be enough consideration for airflow so that heat does not accumulate around the power module vicinity. Determine external components configuration and mounting direction on PCB such that air could flow through power module at forced air cooling or convection cooling. Take note, output power derating is needed as shown in followings. The derating curves provided is based on the below set-up condition.




Fig.1-1 Output derating set-up condition

Fig. 1-2, 1-3, and 1-4 shows output derating vs ambient temperature.


In this case, natural convection cooling means occurance of 0.2m/s airflow due to self heating of the power module. If the product is used out of derating curve, they shut down by OTP (over temperature protection).


Please note that OTP cannnot operate correctly when cooling is concentrated on thermal detector only


Output derating by ambient temperature

Vin=48VDC at standard vertical mounting


PAH200H48-1R8 (include /P, /V, /PV option)







PAH200H48-3R3 (include /P, /V, /PV option)



TDK·Lambda


PAH200H

(2) Output derating by PCB

When use with different measurement conditions from output derating by ambient temperature, use output derating by PCB temperature as in Fig.1-6.

PCB temperature is decided by temperature of thermal sensor in below Fig.1-5. As the thermal sensor terminals are exposed, when connecting thermocouple, please take sufficient insulation from terminals. Over Thermal Protection of power module is achieved by detecting the PCB temperature through thermal sensor. When the module operates over the output derating curve of PCB temperature, Over Thermal Protection (OTP) functions and output shutdown.

Therefore, measurement of PCB temperature is recommended to ensure the module to operate within the derating curve.






Fig.1-6 Output Derating by PCB Temperature

2 Mounting Method

(1) Mounting hole on PCB

Diameter of hole and land of PCB with referring below.

Туре	PAH200H48
Input Terminal Pin	φ 1.0mm
Hole Diameter	φ 1.5mm
Land Diameter	φ 3.0mm
Output Terminal Pin	φ 2.0mm
Hole Diameter	φ 2.5mm
Land Diameter	φ 4.5mm
Signal Terminal Pin	φ 1.0mm
Hole Diameter	φ 1.5mm
Land Diameter	φ 3.0mm

For position of the holes, see outline drawing of the power module.

(2) Output Terminal Pin

Connect +V, -V terminal pins such that the contact resistance becomes minimal. Note that large contact resistance could result into reduction of efficiency and abnormal temperature rise at terminal connections

Large output current flows through the output pattern. If pattern is too narrow, voltage drop will occur and heat on pattern will increase. Relationship of current and the pattern width varies depending on materials of printed circuit board, conductor width, maximum allowable temperature rise of the pattern etc.. Confirmation on manufactures of printed circuit board is definitely necessary for designing.

Recommended Soldering Method

- Soldering dip 260°C within 6 seconds Pre-heat condition 110°C 30 - 40 seconds
- (2) Soldering iron 350°C within 3 seconds

4 Recommended Cleaning Condition

Recommended cleaning condition after soldering is as follows.

- Cleaning solvent
- IPA (isopropyl alcohol)
- Cleaning Procedure
- Use brush and dry the solvent completely.

Note) For other cleaning methods, contact us.

3. Before concluding power module damage

Verify following items before concluding power module damage.

1) No output voltage

- Is specified input voltage applied?
- Are the ON/OFF control terminal (CNT terminal), remote sensing terminal (+S,-S), output voltage trimming terminal (TRM) correctly connected?
- For cases where output voltage adjustment is used, is the resistor or variable resistor setting, connections correctly done?
- Are there no abnormalities in the output load used?
- Is the ambient temperature within the specified temperature derating curve?

2) Output voltage is high.

- Are the remote sensing terminals (+S, -S) correctly connected?
- Is the measurement done at the sensing points?
- For cases where output voltage adjustment is used, is the resistor or volume setting, connections correctly done?

- 3) Output voltage is low
 - Is specified input voltage applied?
 - Are the remote sensing terminals (+S, -S) correctly connected?
 - Is the measurement done at the sensing points?
 - For cases where output voltage adjustment is used, is the resistor or variable resistor setting, connections correctly done?
- Are there no abnormalities in the output load used?
- 4) Load regulation and line regulation is large
 - Is specified input voltage applied?
 - Are the input terminals and the output terminals firmly connected?
 - Is the measurement done at the sensing points?
- Is the input or output wire too thin?
- 5) Output ripple voltage is large
 - Is the measuring method used the same or equivalent with the specified method in the Application Notes?
 - Is the input ripple voltage value within the specified value?

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TDK-Lambda:

PAH200H481R2/B PAH200H481R2/BC PAH200H481R2/BCV PAH200H481R2/BCV PAH200H481R2/BCV PAH200H481R2/BP PAH200H481R2/BPV PAH200H481R2/C PAH200H481R2/CP PAH200H481R2/CV PAH200H481R2/CV PAH200H481R2/P PAH200H481R2/V PAH200H481R5 PAH200H481R5/B PAH200H481R5/BCP PAH200H481R5/BCV PAH200H481R5/BP PAH200H481R5/P PAH200H481R5/BV PAH200H481R5/C PAH200H481R5/CP PAH200H481R5/CPV PAH200H481R5/P PAH200H481R5/PV PAH200H481R5/V PAH200H481R8/B PAH200H481R8/BC PAH200H481R8/PC PAH200H481R8/PV PAH200H481R8/V PAH200H481R8/C PAH200H481R8/CV PAH200H481R8/P PAH200H481R8/PV PAH200H481R8/V PAH200H482R5/ PAH200H482R5/B PAH200H482R5/BC PAH200H482R5/BCP PAH200H482R5/BCPV PAH200H482R5/BCV PAH200H482R5/B PAH200H482R5/BC PAH200H482R5/C PAH200H482R5/CCP PAH200H482R5/CPV PAH200H482R5/CV PAH200H482R5/BV PAH200H482R5/C PAH200H482R5/CP PAH200H482R5/CPV PAH200H483R3/BCV PAH200H483R3/B PAH200H483R3/BC PAH200H483R3/CPV PAH200H483R3/BCV PAH200H483R3/P PAH200H483R3/B PAH200H483R3/BC PAH200H483R3/CV PAH200H483R3/CV PAH200H483R3/P PAH200H483R3/V PAH200H481R5/BC PAH200H483R3/CV PAH200H483R3/P PAH200H482R5/P PAH200H483R3/V PAH200H481R5/BC PAH200H483R3/CV PAH200H483R3/CV PAH200H483R3/P PAH200H483R3/V PAH200H481R5/BC PAH200H483R3/CV PAH200H483R3/CV PAH200H483R3/P PAH200H483R3/P PAH200H483R3/BC PAH200H483R3/CV PAH200H483R3/CV PAH200H483R3/P PAH200H483R3/P PAH200H483R3/BC PAH200H483R3/CV PAH200H483R3/CV PAH200H483R3/P PAH200H483R3/P PAH200H483R3/BC PAH200H483R3/CV PAH200H483R3/CV PAH200H483R3/P PAH200H483R3/V PAH200H483R3/BC PAH200H483R3/CV PAH200H483R3/CV PAH200H483R3/P PAH200H483R3/V PAH200H483R3/BC PAH200H483R3/CV PAH200H483R3/CV PAH200H483R3/P PAH200H483R3/P PAH200H483R3/CV PAH200H483R3/CV PAH200H483R3/P PAH200H483R3/V PAH200H483R3/BC PAH200H483R3/CP PAH200H483R3/C PAH200H483R3/P PAH200H483R3/V PAH200H483R3/BC PAH200H483R3/CP PAH200H483R3/C PAH200H483R3/P PAH200H483R3/B PAH200H483R3/BV PAH200H483R3/CP PA