



# TGF2965-SM

5 W, 32 V, 0.03–3 GHz, GaN RF Input-Matched Transistor

## General Description



The Qorvo TGF2965-SM is a 6 W ( $P_{3dB}$ ), 50  $\Omega$ -input matched discrete GaN on SiC HEMT which operates from 0.03 to 3.0 GHz. The integrated input matching network enables wideband gain and power performance, while the output can be matched on board to optimize power and efficiency for any region within the band.

The device is housed in an industry-standard 3 x 3 mm surface mount QFN package.

Lead-free and ROHS compliant

Evaluation boards are available upon request.

## Functional Block Diagram

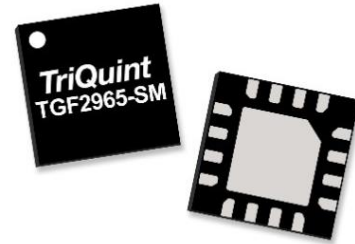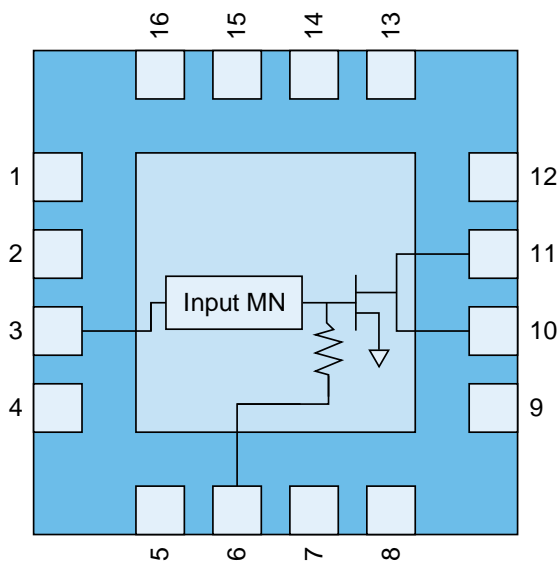

## Product Features

- Frequency: 0.03 to 3.0 GHz
  - Output Power ( $P_{3dB}$ )<sup>1</sup>: 6.0 W
  - Linear Gain<sup>1</sup>: 18 dB
  - Typical  $DEFF_{3dB}$ <sup>1</sup>: 65%
  - Operating Voltage: 32 V
  - Low thermal resistance package
  - CW and Pulse capable
  - 3 x 3 mm package
- <sup>1</sup> At 2 GHz

## Applications

- Military Radar
- Civilian Radar
- Land Mobile and Military Radio Communications
- Test Instrumentation
- Wideband and Narrowband Amplifiers
- Jammers

## Ordering Information

Part	Description
1123170	TGF2965-SM 100 pc MOQ
1123185	TGF2965-SM EVB
TGF2965-SMTR13	TGF2965-SM Tape/Reel 2500 pc MOQ

## Absolute Maximum Ratings

Parameter	Value/Range
Breakdown Voltage ( $V_{D0}$ )	100 V min.
Gate Voltage Range ( $V_G$ )	-7 to +2 V
Drain Current ( $I_D$ )	0.6 A
Gate Current ( $I_G$ )	See page 4.
Power Dissipation ( $P_D$ )	7.5 W
RF Input Power, CW, $T = 25\text{ }^\circ\text{C}$ ( $P_{IN}$ )	30 dBm

Operation of this device outside the parameter ranges given above may cause permanent damage. These are stress ratings only, and functional operation of the device at these conditions is not implied.

## Recommended Operating Conditions

Parameter <sup>1</sup>	Value/Range
Drain Voltage ( $V_D$ )	32 V (Typ.)
Drain Quiescent Current ( $I_{DQ}$ )	25 mA (Typ.)
Peak Drain Current ( $I_D$ )	326 mA (Typ.)
Gate Voltage ( $V_G$ )	-2.7 V (Typ.)
Power Dissipation, CW ( $P_D$ )	7.05 W (Max)
Power Dissipation, Pulse ( $P_D$ ) <sup>2</sup>	9.1 W (Max)

<sup>1</sup>Electrical specifications are measured at specified test conditions. Specifications are not guaranteed over all recommended operating conditions.

<sup>2</sup>100uS Pulse Width, 20% Duty Cycle

## RF Characterization–Load Pull Performance

Test conditions unless otherwise noted:  $T_A = 25\text{ }^\circ\text{C}$ ,  $V_D = 32\text{ V}$ ,  $I_{DQ} = 30\text{ mA}$ , Pulse: 100 uS Pulse Width, 20% Duty Cycle

Symbol	Parameter	Typical					Units
F	Frequency	1	1.5	2	2.5	3	GHz
$G_{LIN}$	Linear Gain, Power Tuned	17.3	17.4	18.2	17.8	16.9	dB
$P_{3dB}$	Output Power at 3 dB Gain Compression, Power Tuned	37.8	37.7	37.8	38.1	38.3	dBm
$DEFF_{3dB}$	Drain Efficiency at 3 dB Gain Compression, Efficiency Tuned	76.0	62.7	65.2	65.4	71.9	%
$G_{3dB}$	Gain at 3 dB Compression, Power Tuned	14.3	14.4	15.2	14.8	13.9	dB

## RF Characterization–0.03–3 GHz EVB Performance at 2.5 GHz–Pulsed

Test conditions unless otherwise noted:  $T_A = 25\text{ }^\circ\text{C}$ ,  $V_D = 32\text{ V}$ ,  $I_{DQ} = 30\text{ mA}$ , Pulse: 100 uS Pulse Width, 20% Duty Cycle

Symbol	Parameter	Min	Typical	Max	Units
$G_{LIN}$	Linear Gain		17.1		dB
$P_{3dB}$	Output Power at 3 dB Gain Compression		5.0		W
$DE_{3dB}$	Drain Efficiency at 3 dB Gain Compression		50.6		%
$G_{3dB}$	Gain at 3 dB Compression		14.1		dB


## RF Characterization–Mismatch Ruggedness at 1, 2 and 3 GHz

Test conditions unless otherwise noted:  $T_A = 25\text{ }^\circ\text{C}$ ,  $V_D = 28\text{ V}$ ,  $I_{DQ} = 30\text{ mA}$ , Pulse: 100 uS Pulse Width, 20% Duty Cycle  
Driving input power is determined at pulsed compression under matched condition at EVB output connector.

Symbol	Parameter	dB Compression	Typical
VSWR	Impedance Mismatch Ruggedness	3	10:1
VSWR	Impedance Mismatch Ruggedness	8	2:1

**Load Pull Smith Charts <sup>1,2</sup>**

RF performance that the device typically exhibits when placed in the specified impedance environment. The impedances are not the impedances of the device, they are the impedances presented to the device via an RF circuit or load-pull system. The impedances listed follow an optimized trajectory to maintain high power and high efficiency.

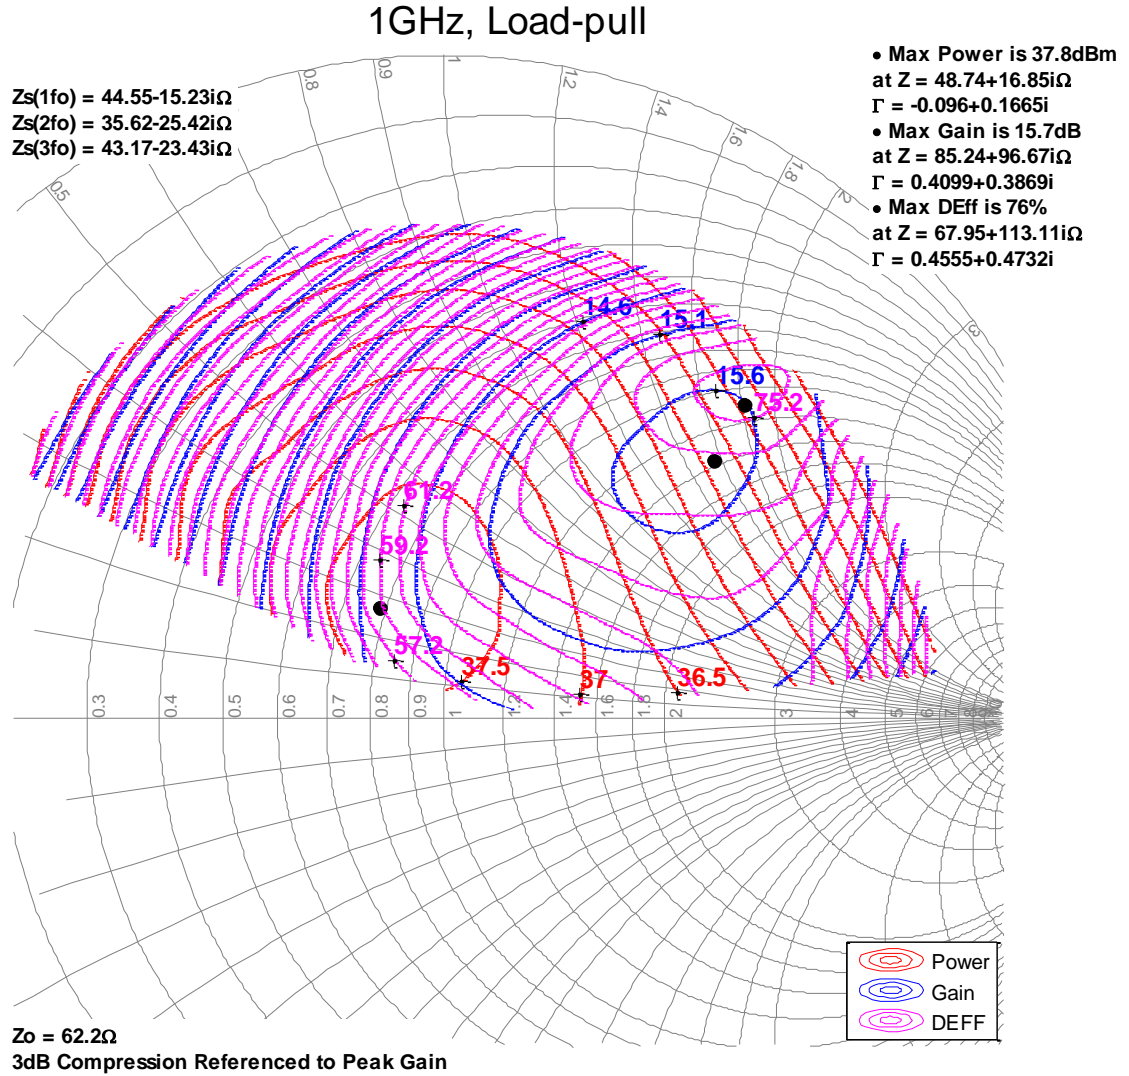


**Notes:**

1. 32 V, 30 mA, Pulsed signal with 100 uS pulse width and 20% duty cycle. 3 dB compression referenced to peak gain.
2. See page 18 for load pull and source pull reference planes.

Load Pull Smith Charts <sup>1, 2</sup>

RF performance that the device typically exhibits when placed in the specified impedance environment. The impedances are not the impedances of the device, they are the impedances presented to the device via an RF circuit or load-pull system. The impedances listed follow an optimized trajectory to maintain high power and high efficiency.

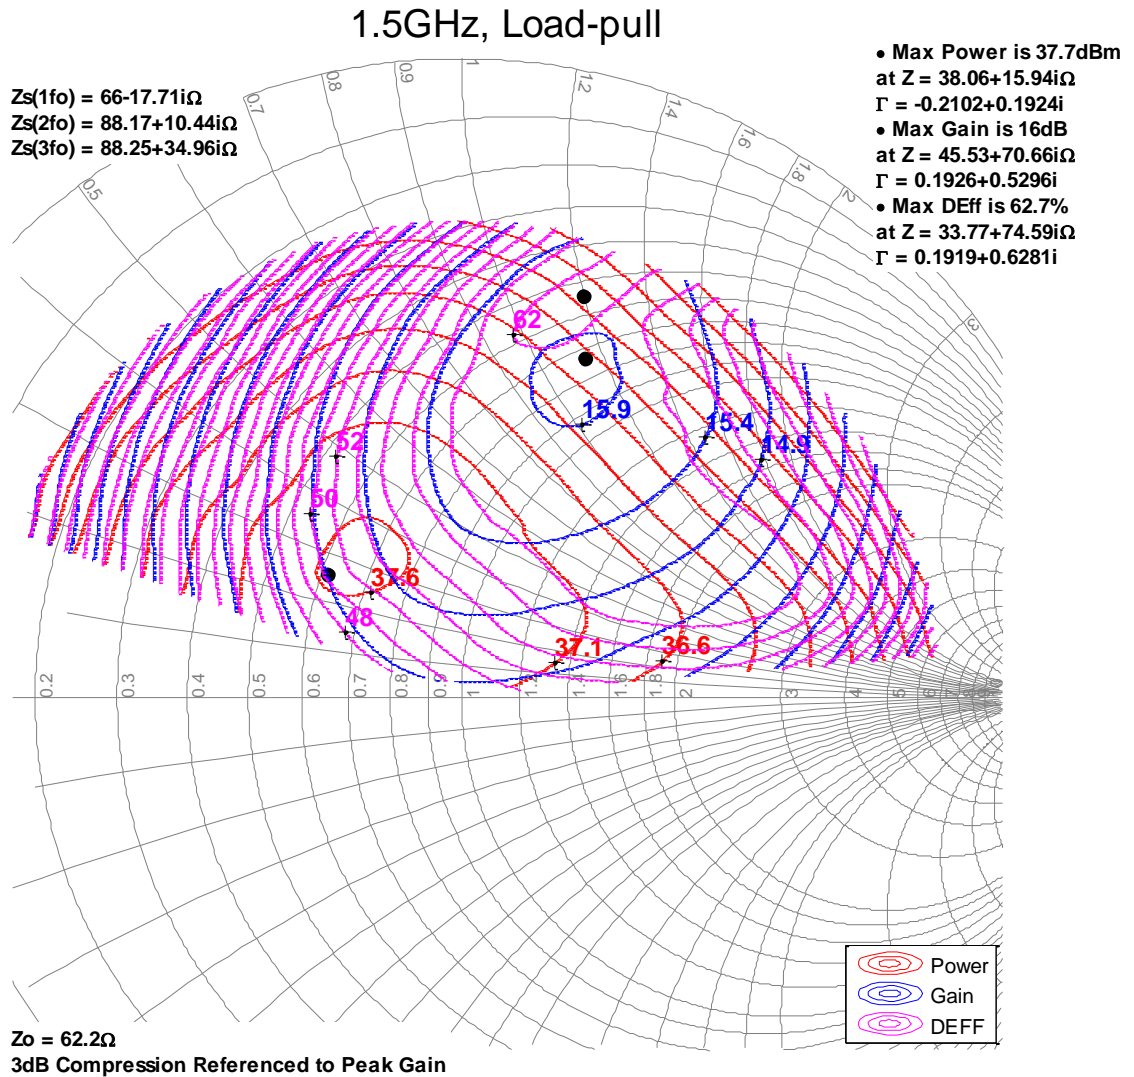


Notes:

1. 32 V, 30 mA, Pulsed signal with 100 uS pulse width and 20% duty cycle. 3 dB compression referenced to peak gain.
2. See page 18 for load pull and source pull reference planes.

**Load Pull Smith Charts <sup>1, 2</sup>**

RF performance that the device typically exhibits when placed in the specified impedance environment. The impedances are not the impedances of the device, they are the impedances presented to the device via an RF circuit or load-pull system. The impedances listed follow an optimized trajectory to maintain high power and high efficiency.

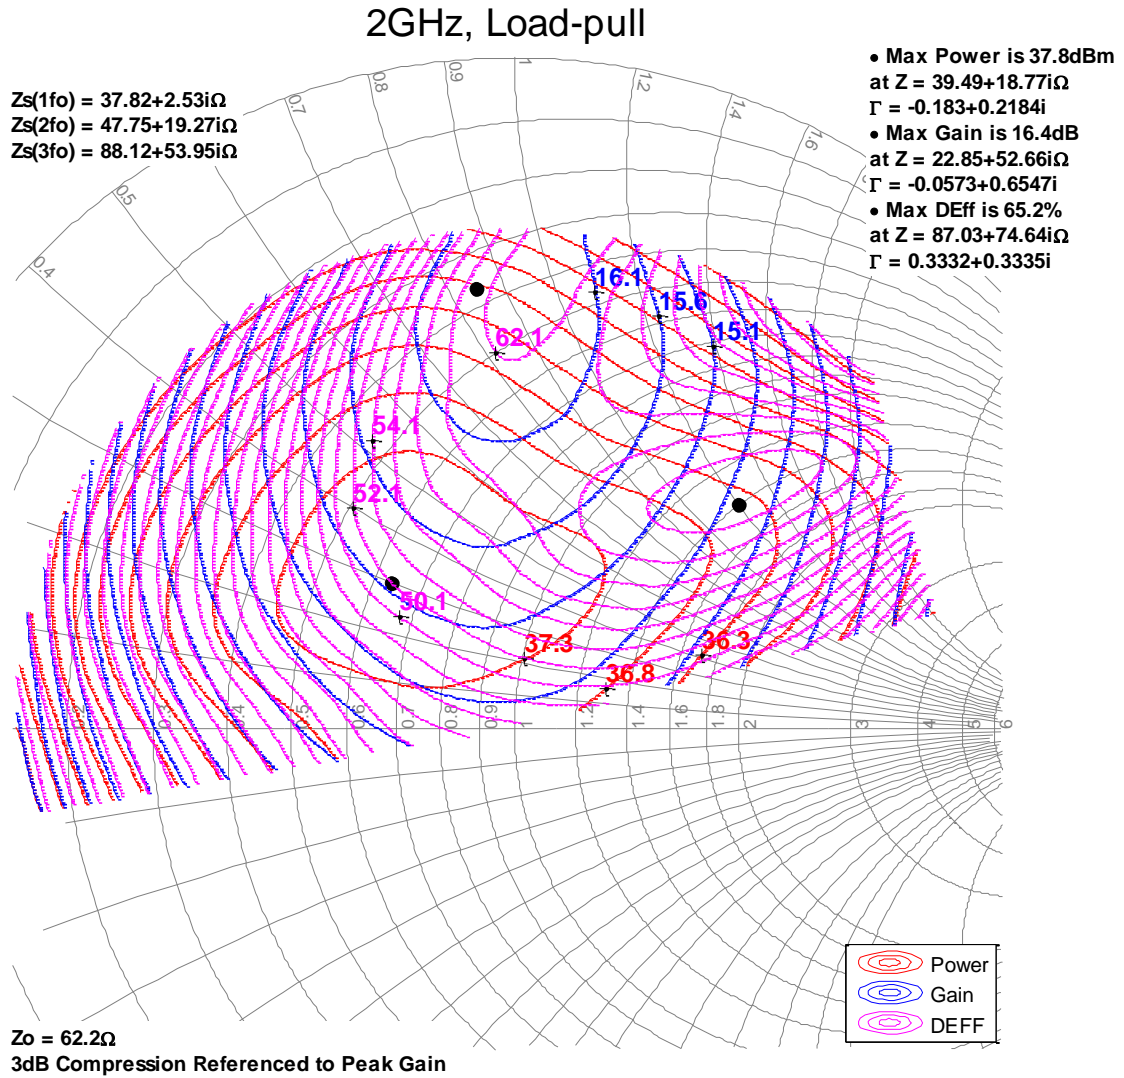


**Notes:**

1. 32 V, 30 mA, Pulsed signal with 100 uS pulse width and 20% duty cycle. 3 dB compression referenced to peak gain.
2. See page 18 for load pull and source pull reference planes.

**Load Pull Smith Charts <sup>1, 2</sup>**

RF performance that the device typically exhibits when placed in the specified impedance environment. The impedances are not the impedances of the device, they are the impedances presented to the device via an RF circuit or load-pull system. The impedances listed follow an optimized trajectory to maintain high power and high efficiency.

**2.5GHz, Load-pull**

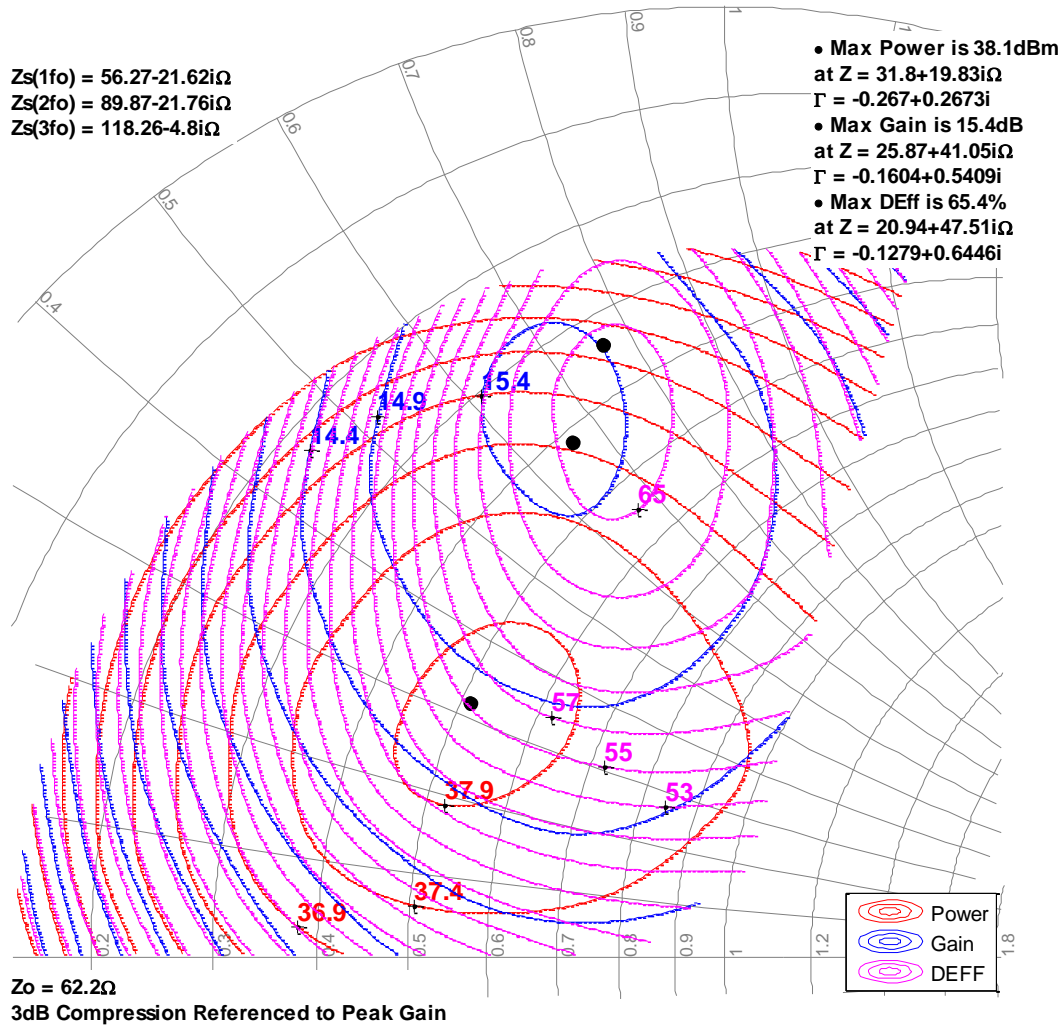


**Notes:**

1. 32 V, 30 mA, Pulsed signal with 100 uS pulse width and 20% duty cycle. 3 dB compression referenced to peak gain.
2. See page 18 for load pull and source pull reference planes.

**Load Pull Smith Charts <sup>1, 2</sup>**

RF performance that the device typically exhibits when placed in the specified impedance environment. The impedances are not the impedances of the device, they are the impedances presented to the device via an RF circuit or load-pull system. The impedances listed follow an optimized trajectory to maintain high power and high efficiency.






**3GHz, Load-pull**

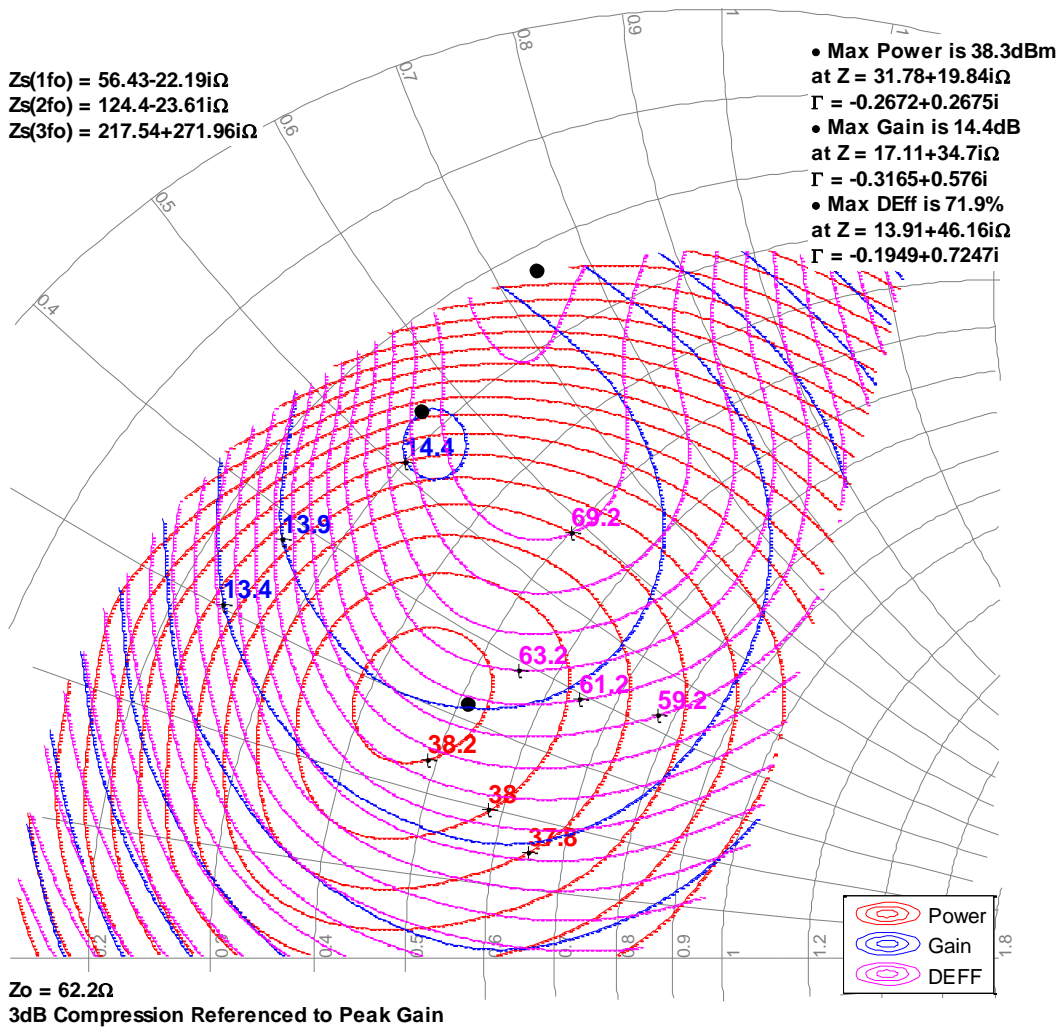

**Notes:**

1. 32 V, 30 mA, Pulsed signal with 100 uS pulse width and 20% duty cycle. 3 dB compression referenced to peak gain.
2. See page 18 for load pull and source pull reference planes.

Typical Performance—Power Tuned <sup>1,2</sup>

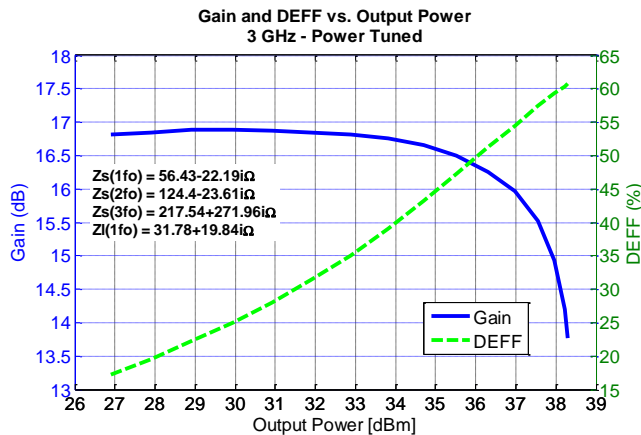
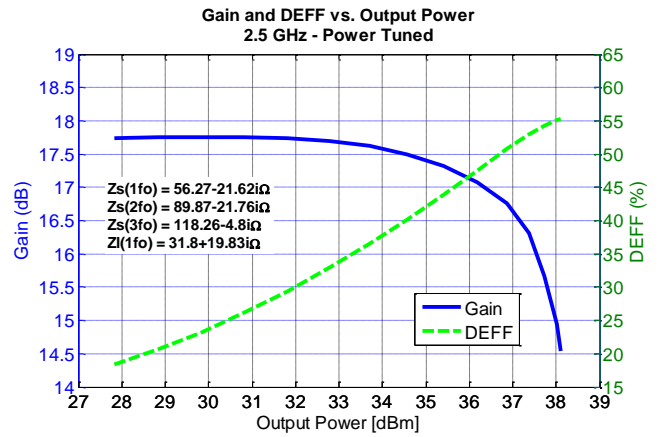
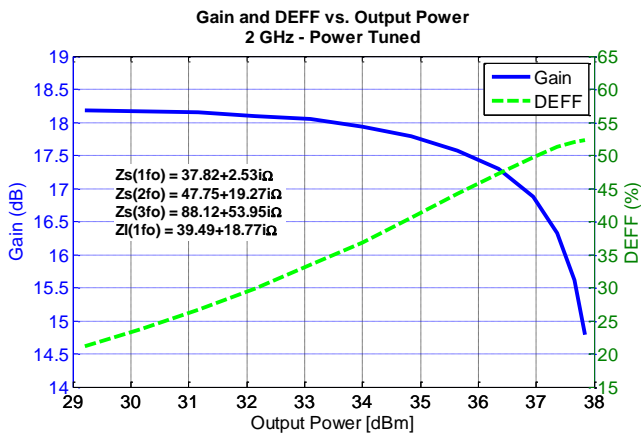
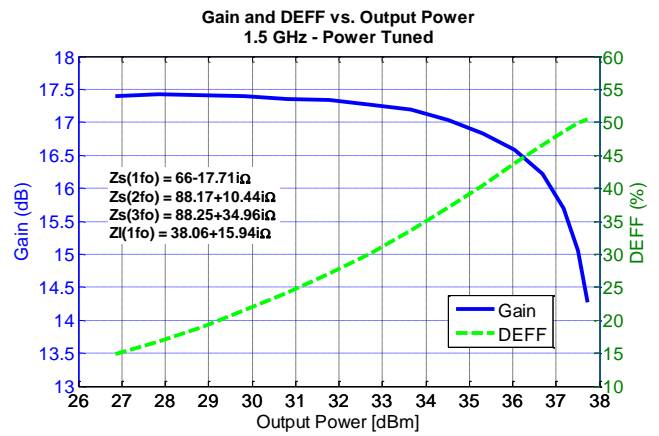
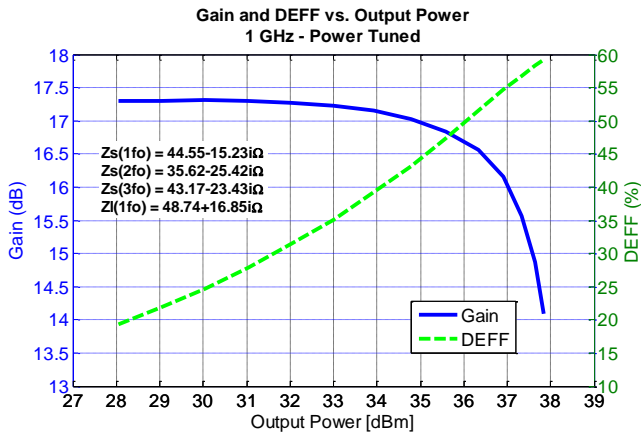


Notes:

1. Pulsed signal with 100uS pulse width and 20% duty cycle
2. See page 18 for load pull and source pull reference planes where the performance was measured.



Typical Performance—Efficiency Tuned <sup>1,2</sup>

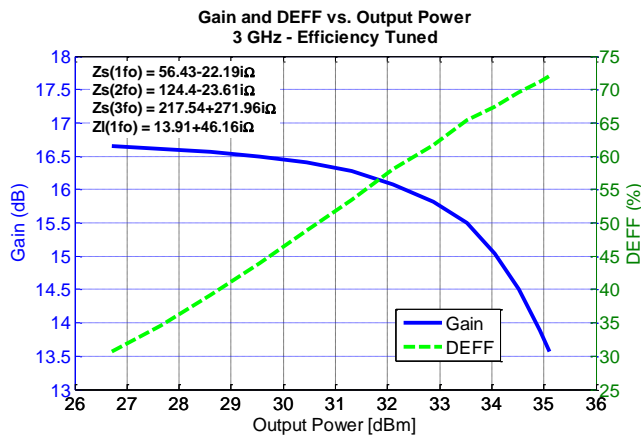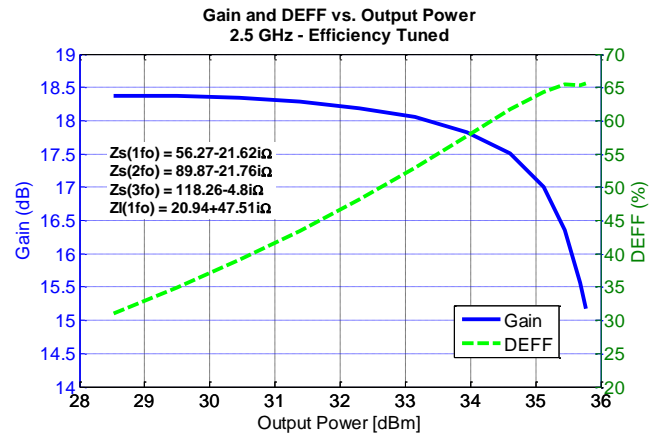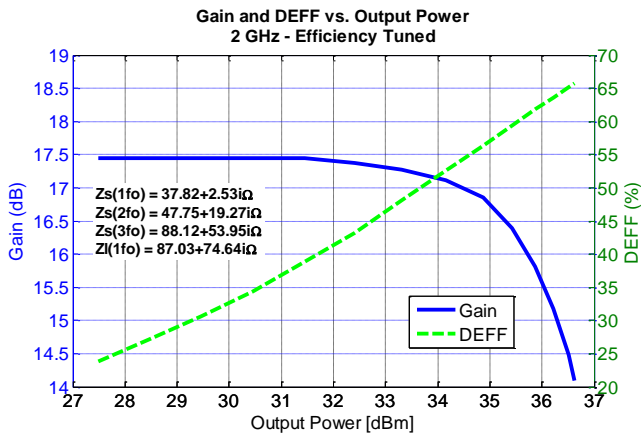
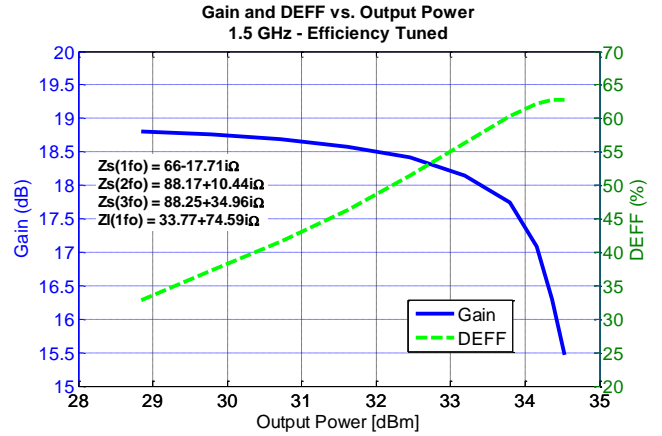
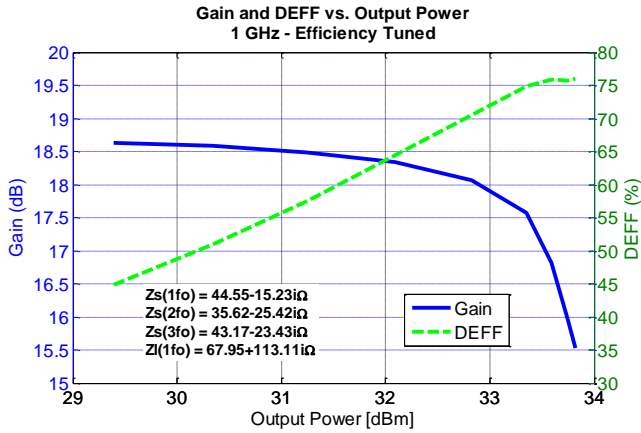


Notes:

1. Pulsed signal with 100uS pulse width and 20% duty cycle
2. See page 18 for load pull and source pull reference planes where the performance was measured.

0.03–3 GHz Evaluation Board Performance Over Temperature<sup>1, 2</sup>

Performance measured on Qorvo’s 0.03 GHz to 3 GHz Evaluation Board.

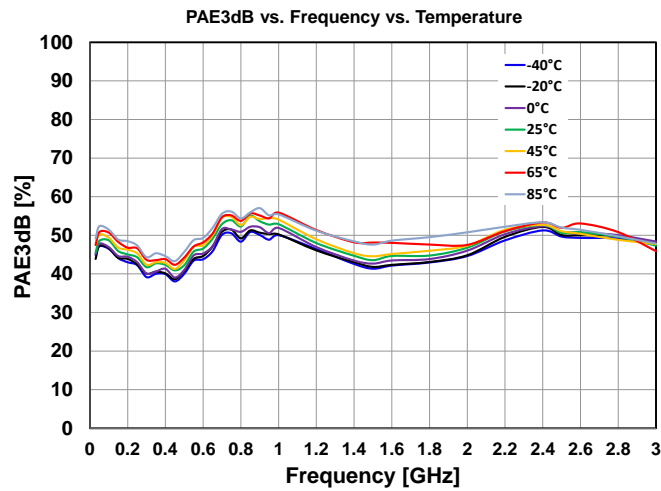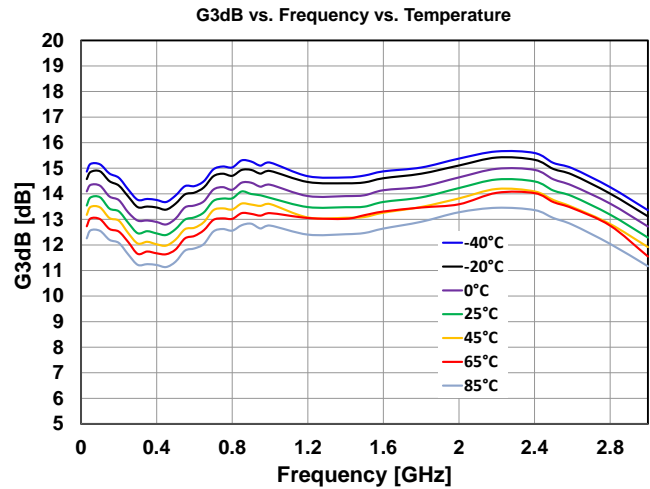
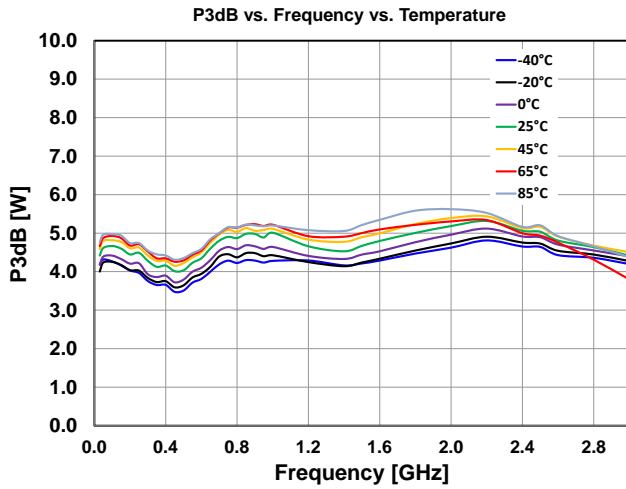


Notes:

1. Test Conditions:  $V_{DS} = 32\text{ V}$ ,  $I_{DQ} = 30\text{ mA}$
2. Test Signal: Pulse Width = 100  $\mu\text{s}$ , Duty Cycle = 20%

### 0.03–3 GHz Evaluation Board Performance At 25 °C<sup>1,2</sup> – Pulsed

Performance measured on Qorvo's 0.03 GHz to 3 GHz Evaluation Board.

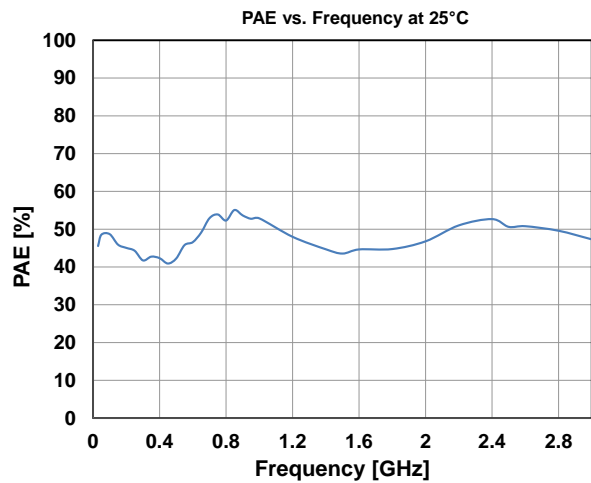
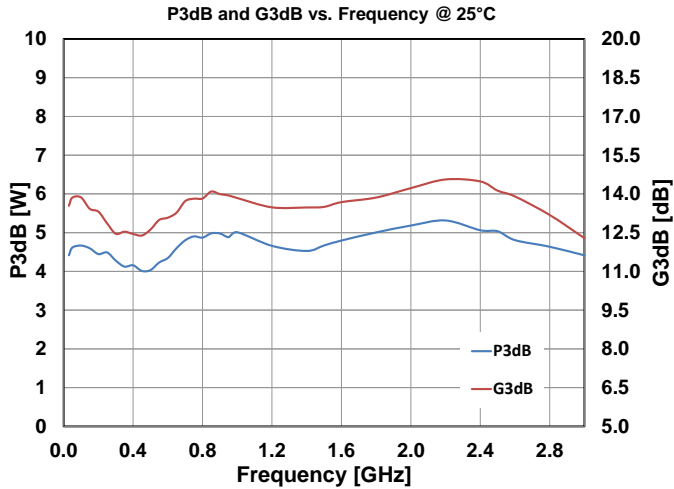


Notes:

1. Test Conditions:  $V_{DS} = 32\text{ V}$ ,  $I_{DQ} = 30\text{ mA}$ ,  $25\text{ °C}$
2. Test Signal: Pulse Width =  $100\text{ }\mu\text{s}$ , Duty Cycle = 20%

### 0.03–3 GHz Evaluation Board Performance At 25 °C<sup>1</sup> – CW






Performance measured on Qorvo's 0.03 GHz to 3 GHz Evaluation Board.

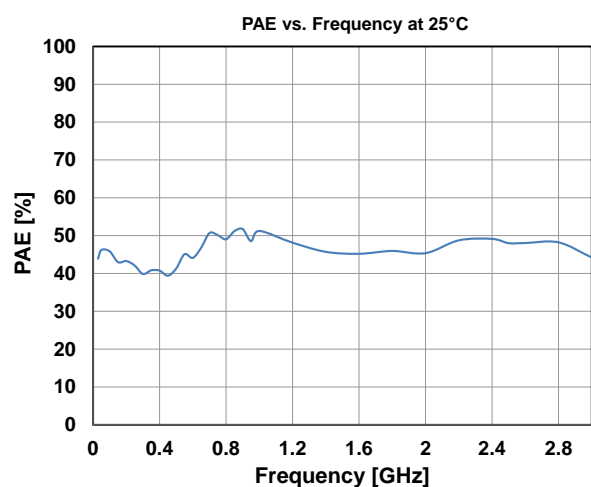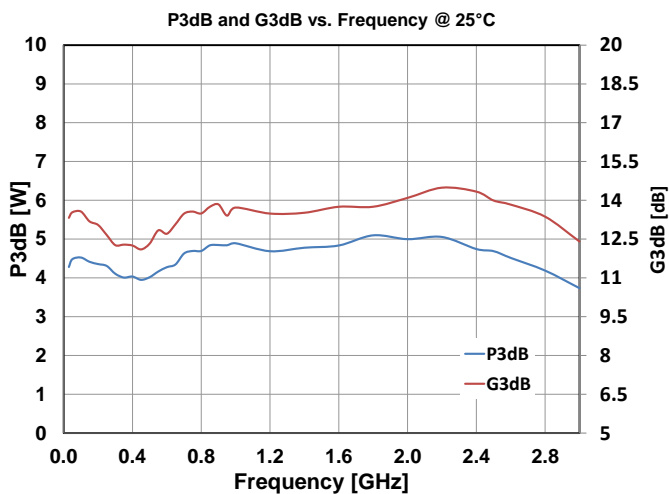

Notes:

1. Test Conditions:  $V_{DS} = 32\text{ V}$ ,  $I_{DQ} = 30\text{ mA}$ ,  $25\text{ °C}$

0.03 – 3 GHz Evaluation Board Performance–Two-Tone Measurements <sup>1</sup>

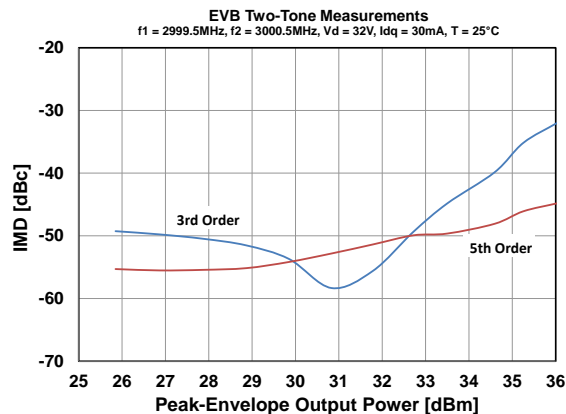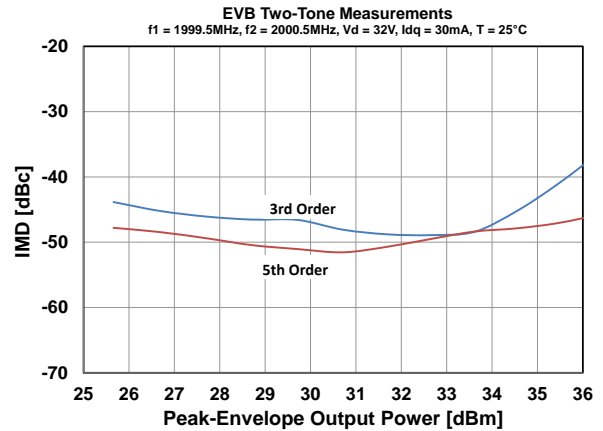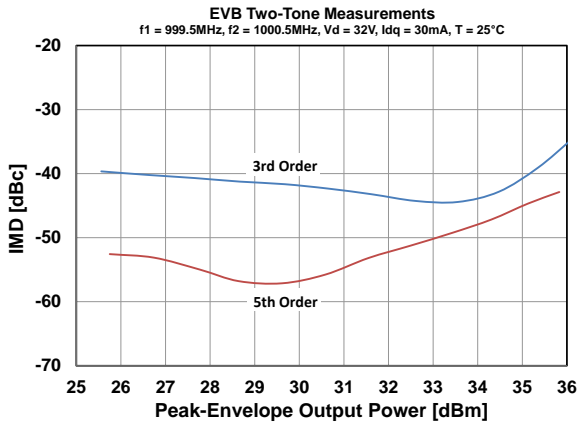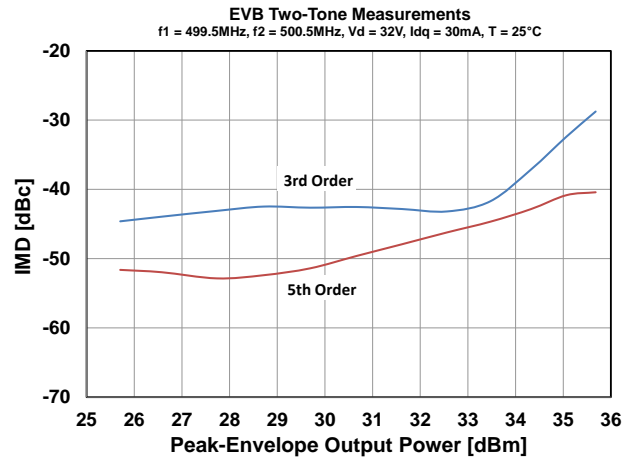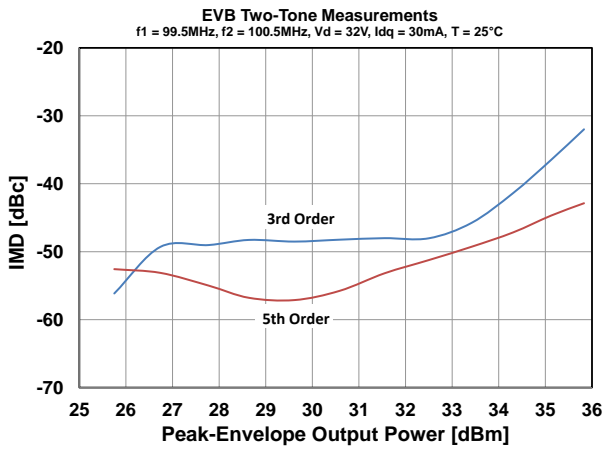



Notes:

1. The Intermodulation Distortion products (IMD) are referenced to peak-envelope output power, which is 6 dB above single-tone output power

Maximum Gate Current

Maximum Gate Current Vs. Peak IR Surface Temperature

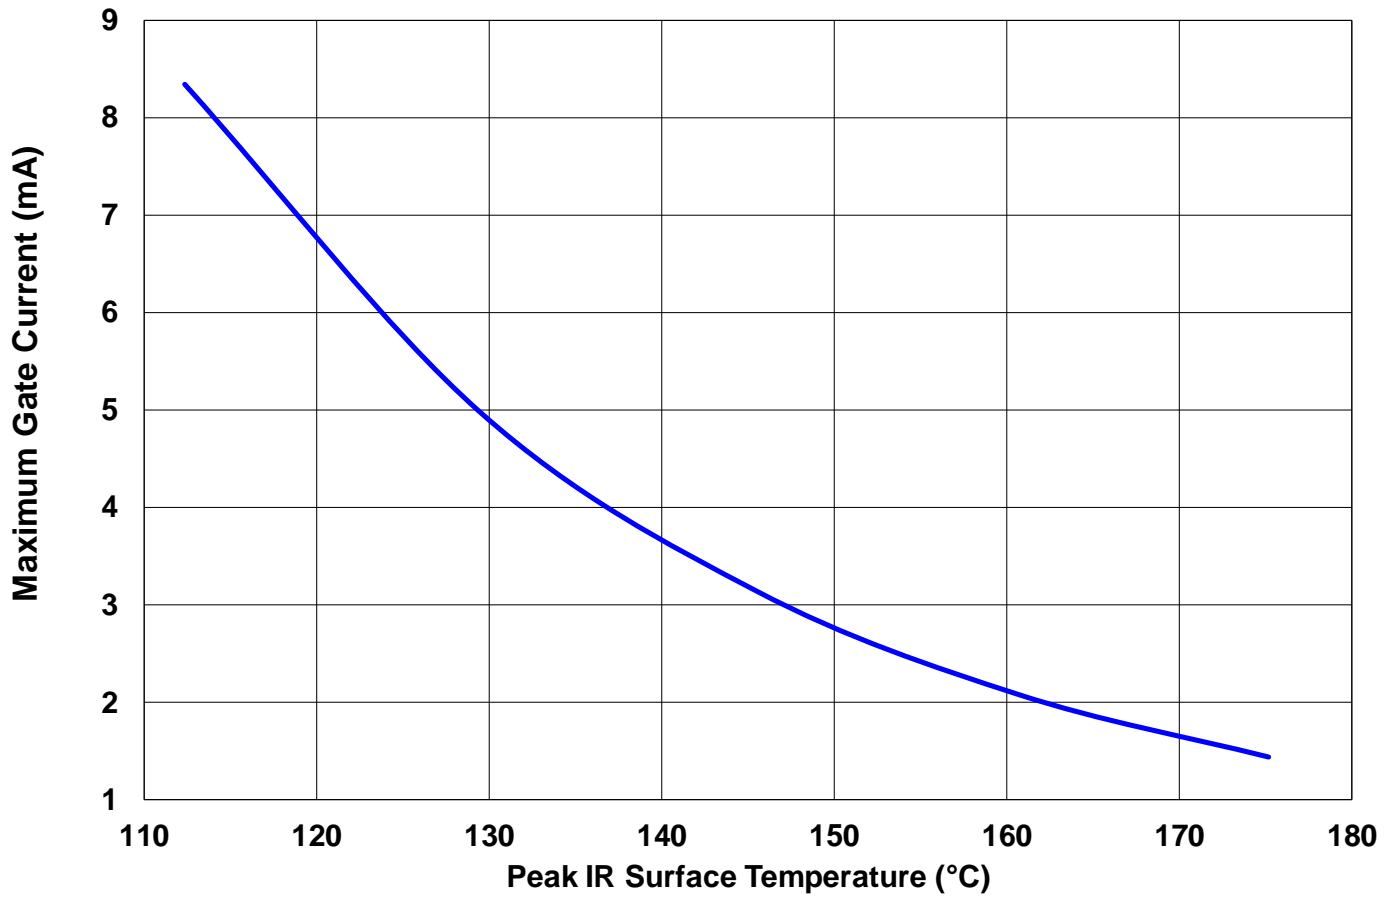

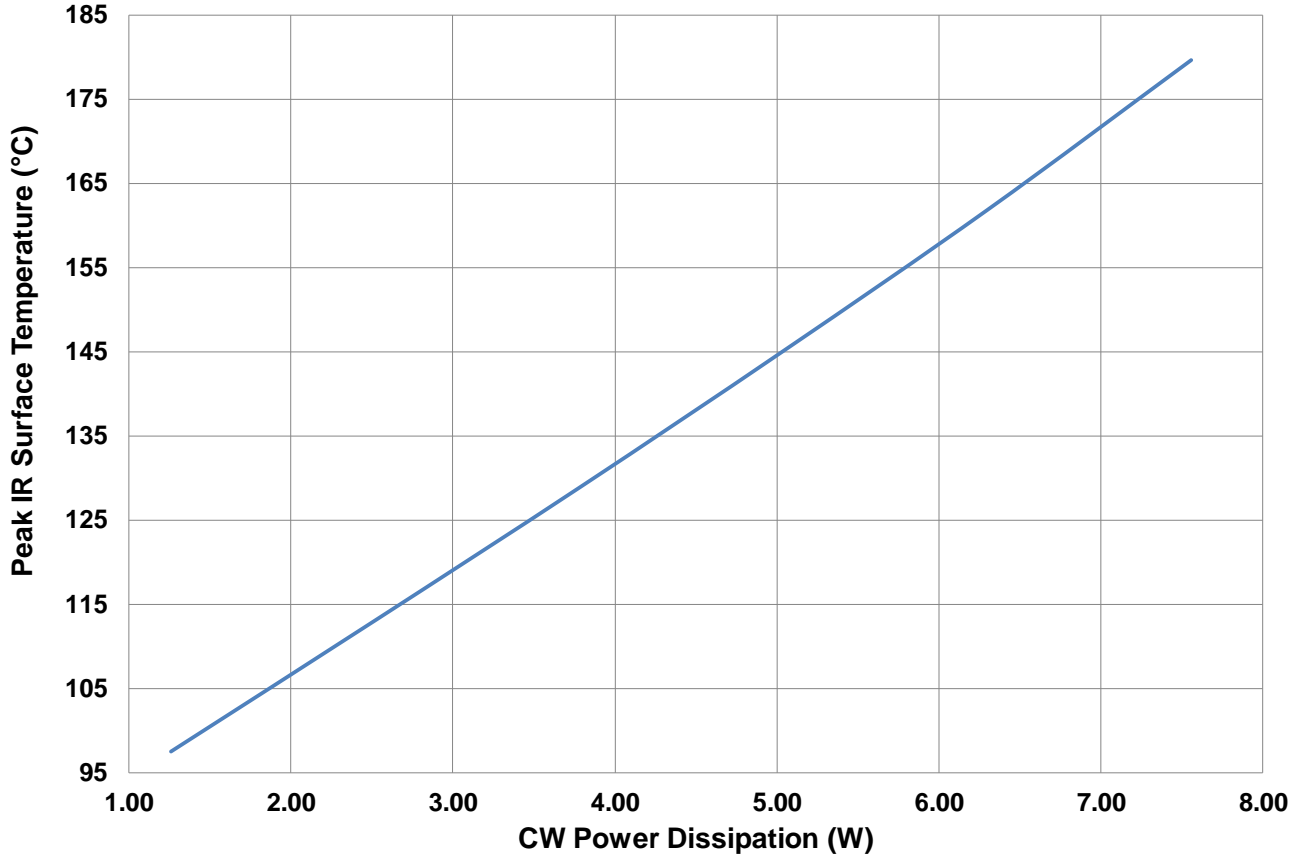
**Thermal and Reliability Information - CW**
**Peak IR Surface Temperature vs. CW Power Dissipation  
Backside of QFN base fixed at 85 °C**


Parameter	Conditions	Values	Units
Thermal Resistance, IR <sup>1</sup> ( $\theta_{JC}$ )	85 °C Case	9.9	°C/W
Peak IR Surface Temperature <sup>1</sup> ( $T_{CH}$ )	1.26 W Pdiss, CW	97.4	°C
Thermal Resistance, IR <sup>1</sup> ( $\theta_{JC}$ )	85 °C Case	11.1	°C/W
Peak IR Surface Temperature <sup>1</sup> ( $T_{CH}$ )	2.52 W Pdiss, CW	113	°C
Thermal Resistance, IR <sup>1</sup> ( $\theta_{JC}$ )	85 °C Case	11.6	°C/W
Peak IR Surface Temperature <sup>1</sup> ( $T_{CH}$ )	3.78 W Pdiss, CW	129	°C
Thermal Resistance, IR <sup>1</sup> ( $\theta_{JC}$ )	85 °C Case	11.9	°C/W
Peak IR Surface Temperature <sup>1</sup> ( $T_{CH}$ )	5.04 W Pdiss, CW	145	°C
Thermal Resistance, IR <sup>1</sup> ( $\theta_{JC}$ )	85 °C Case	12.2	°C/W
Peak IR Surface Temperature <sup>1</sup> ( $T_{CH}$ )	6.30 W Pdiss, CW	162	°C
Thermal Resistance, IR <sup>1</sup> ( $\theta_{JC}$ )	85 °C Case	12.5	°C/W
Peak IR Surface Temperature <sup>1</sup> ( $T_{CH}$ )	7.56 W Pdiss, CW	180	°C

<sup>1</sup>Refer to the following document [GaN Device Channel Temperature, Thermal Resistance, and Reliability Estimates](#)

Thermal and Reliability Information - Pulsed


Peak IR Surface Channel Temperature  
QFN base fixed at 85 °C, P<sub>diss</sub> = 7.6 W

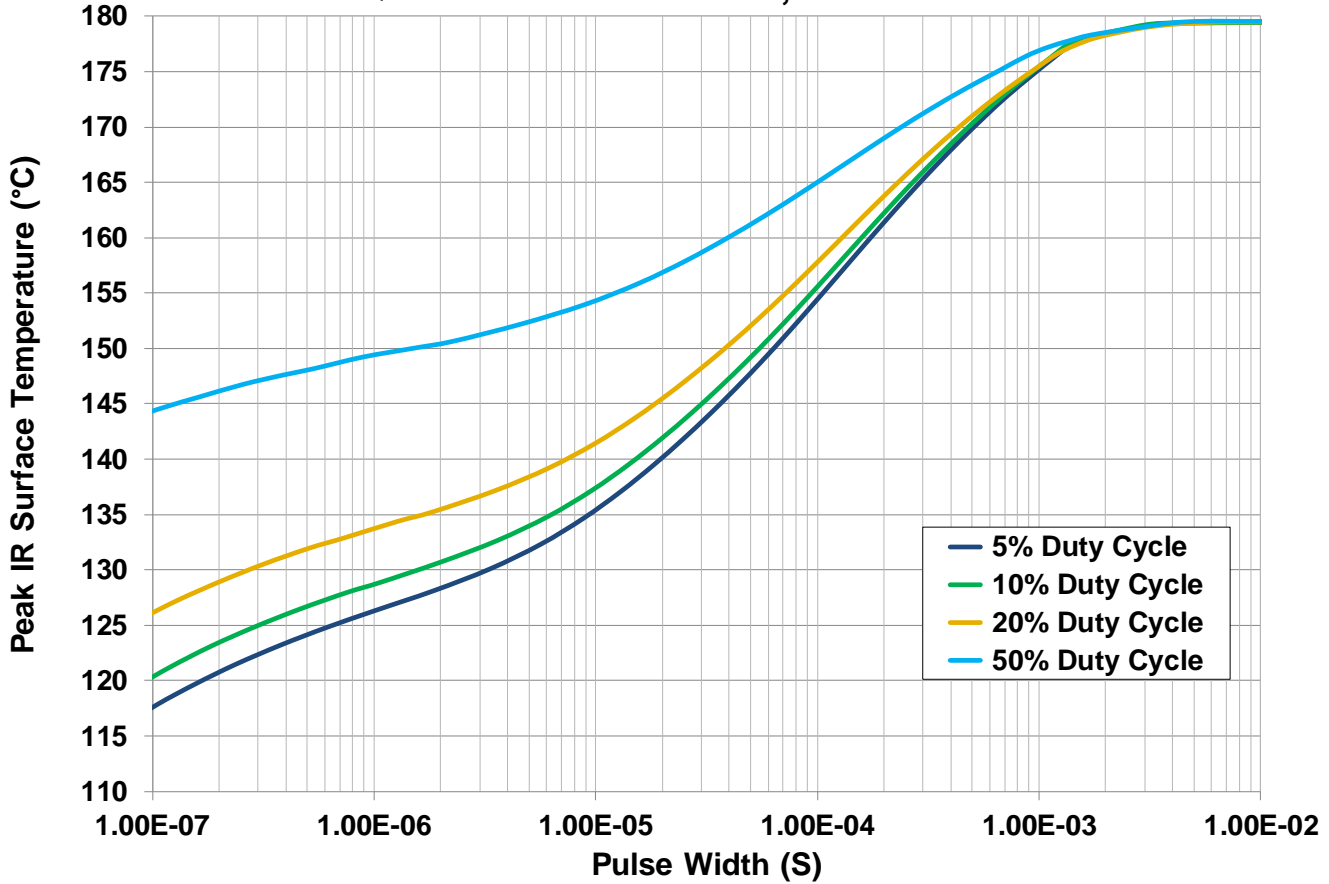

Parameter	Conditions	Values	Units
Thermal Resistance, IR <sup>1</sup> ( $\theta_{JC}$ )	85 °C Case	9.1	°C/W
Peak IR Surface Temperature <sup>1</sup> ( $T_{CH}$ )	7.6 W P <sub>diss</sub> , 100 uS Pulse Width, 5% DC	154	°C
Thermal Resistance, IR <sup>1</sup> ( $\theta_{JC}$ )	85 °C Case	9.3	°C/W
Peak IR Surface Temperature <sup>1</sup> ( $T_{CH}$ )	7.6 W P <sub>diss</sub> , 100 uS Pulse Width, 10% DC	156	°C
Thermal Resistance, IR <sup>1</sup> ( $\theta_{JC}$ )	85 °C Case	9.6	°C/W
Peak IR Surface Temperature <sup>1</sup> ( $T_{CH}$ )	7.6 W P <sub>diss</sub> , 100 uS Pulse Width, 20% DC	158	°C
Thermal Resistance, IR <sup>1</sup> ( $\theta_{JC}$ )	85 °C Case	10.5	°C/W
Peak IR Surface Temperature <sup>1</sup> ( $T_{CH}$ )	7.6 W P <sub>diss</sub> , 100 uS Pulse Width, 50% DC	165	°C

<sup>1</sup>Refer to the following document [GaN Device Channel Temperature, Thermal Resistance, and Reliability Estimates](#)

0.03–3 GHz Application Circuit

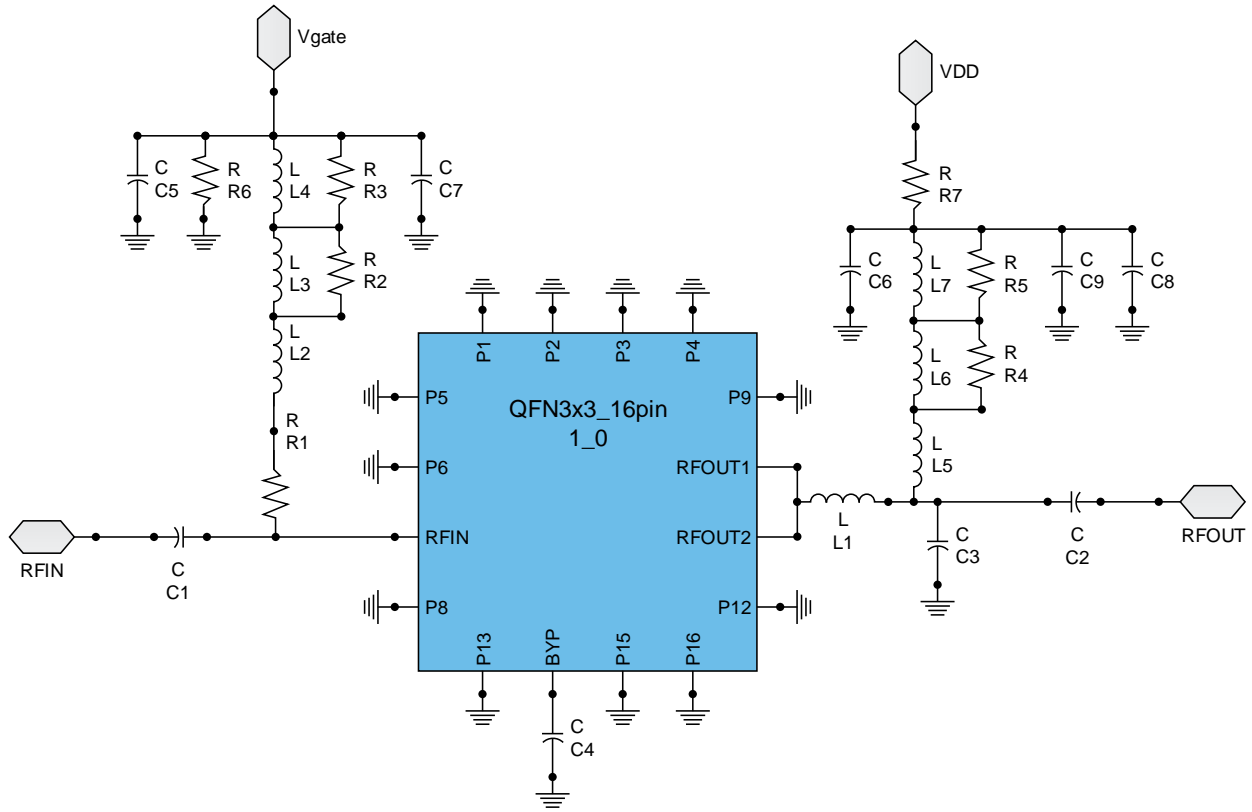

**Bias-up Procedure**

$V_G$  set to -5 V.

$V_D$  set to 32 V.

Adjust  $V_G$  more positive until quiescent  $I_D$  is 30 mA.

Apply RF signal.

**Bias-down Procedure**

Turn off RF signal


Turn off  $V_D$  and wait 1 second to allow drain capacitor dissipation

Turn off  $V_G$



## 0.03–3 GHz Evaluation Board Layout


Top RF layer is 0.020" thick Rogers RO4350B,  $\epsilon_r = 3.48$ . The pad pattern shown has been developed and tested for optimized assembly at Qorvo Semiconductor. The PCB land pattern has been developed to accommodate lead and package tolerances.

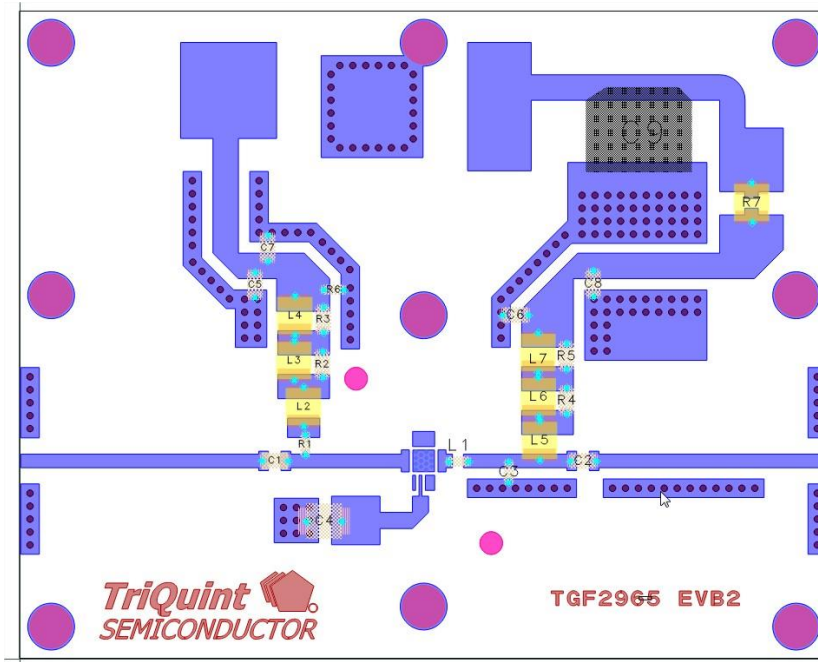

## 00.03–3 GHz EVB Bill of Materials

Reference Des.	Value	Qty	Manuf.	Part Number
C1, C2, C5, C6	2400 pF	4	DLI	C08BL102X-1UN-X0T
C3	0.2 pF	1	Murata	GRM1555C1HR20BZ01
C4, C7	10 uF	2	TDK	C1632X5R0J106M130AC
C8	1 uF	1	AVX	18121C105KAT2A
C9	220 uF	1	United Chemicon	EMVY500ADA221MJA0G
L1	2 nH	1	CoilCraft	0603HC-2N0XJLU
L2, L5	82 nH	2	CoilCraft	1008CS-820XGLB
L3, L6	100 nH	2	CoilCraft	1008CS-101XGLB
L4, L7	900 nH	2	CoilCraft	1008AF-901XJLB
R1	499 $\Omega$	1	Venkel	CR0603-10W-4990FT
R2, R3, R4, R5	400 $\Omega$	4	Venkel	CR0805-8W-4020FT
R6	1 k $\Omega$	1	Venkel	CR0603-10W-1001FT
R7	0 $\Omega$	DNP		

## Pin Layout

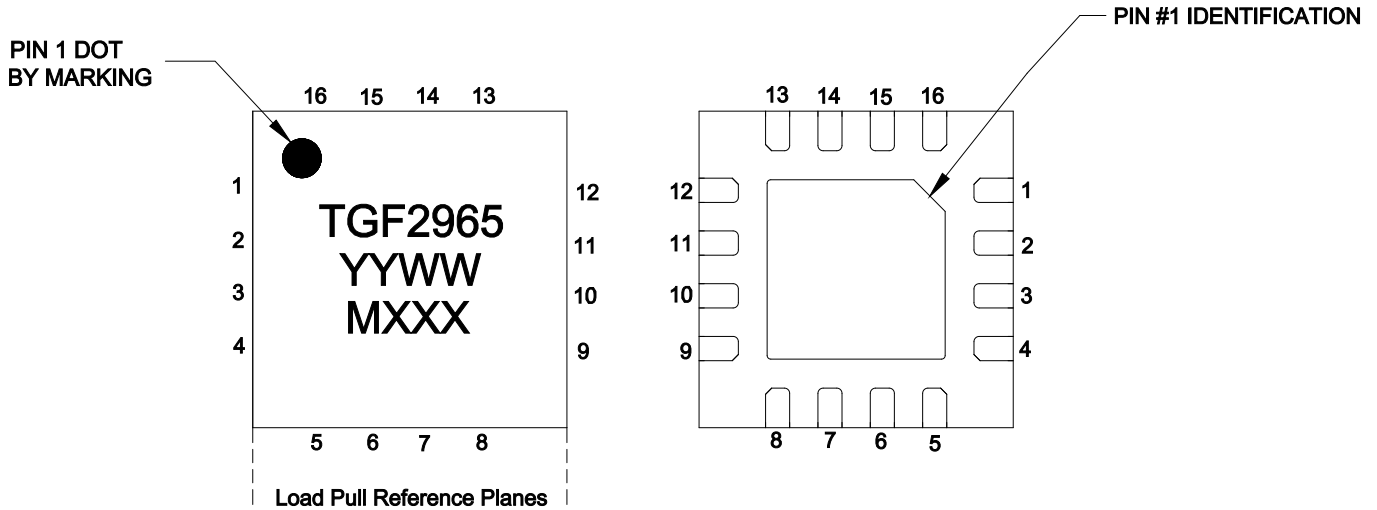

## Pin Description



Pin Number	Symbol	Description
10, 11	$V_D$ /RF OUT	Drain voltage / RF Output to be matched to 50 ohms; see EVB Layout on page 19 as an example.
3	$V_G$ /RF IN	Gate voltage / RF Input to be matched to 50 ohms; see EVB Layout on page 19 as an example.
6	Off-chip Cap	Off-chip capacitor to extend low-frequency gain
Back side	Source	Source connected to ground

Notes:


1. Thermal resistance measured to back side of package.
2. The TGF2965-SM will be marked with the “TGF2965” designator and a lot code marked below the part designator. The “YY” represents the last two digits of the calendar year the part was manufactured, the “WW” is the work week of the assembly lot start, and the “MXXX” is the production lot number.

## Mechanical Information

All dimensions are in millimeters.

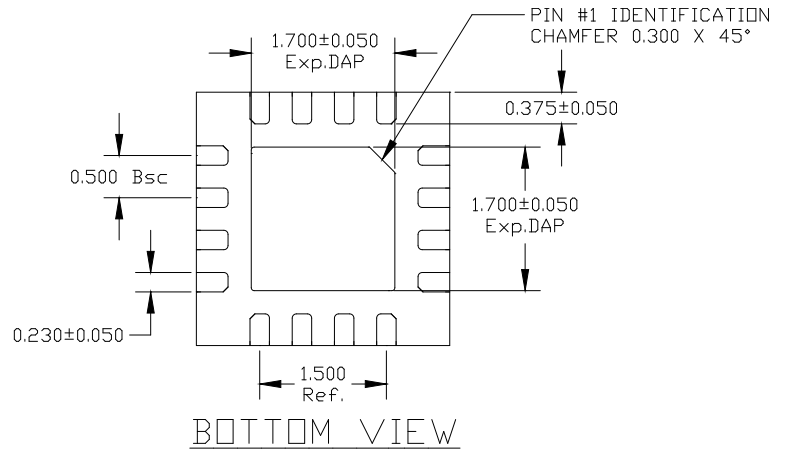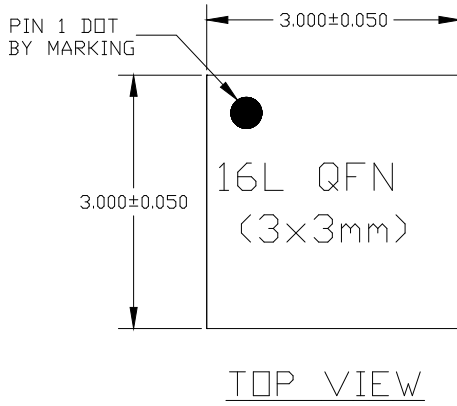


		SLP
A	MAX.	0.900
	NOM.	0.850
	MIN.	0.800

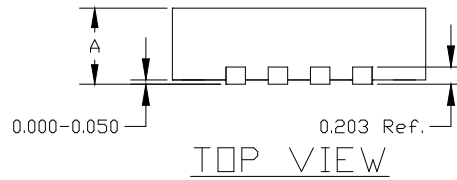

- Note:
1. Unless otherwise noted, all dimension tolerances are +/-0.127 mm.
  2. This package is lead-free/RoHS-compliant. The plating material on the leads is NiAu. It is compatible with both lead-free (maximum 260 °C reflow temperature) and tin-lead (maximum 245 °C reflow temperature) soldering processes

Recommended Soldering Temperature Profile

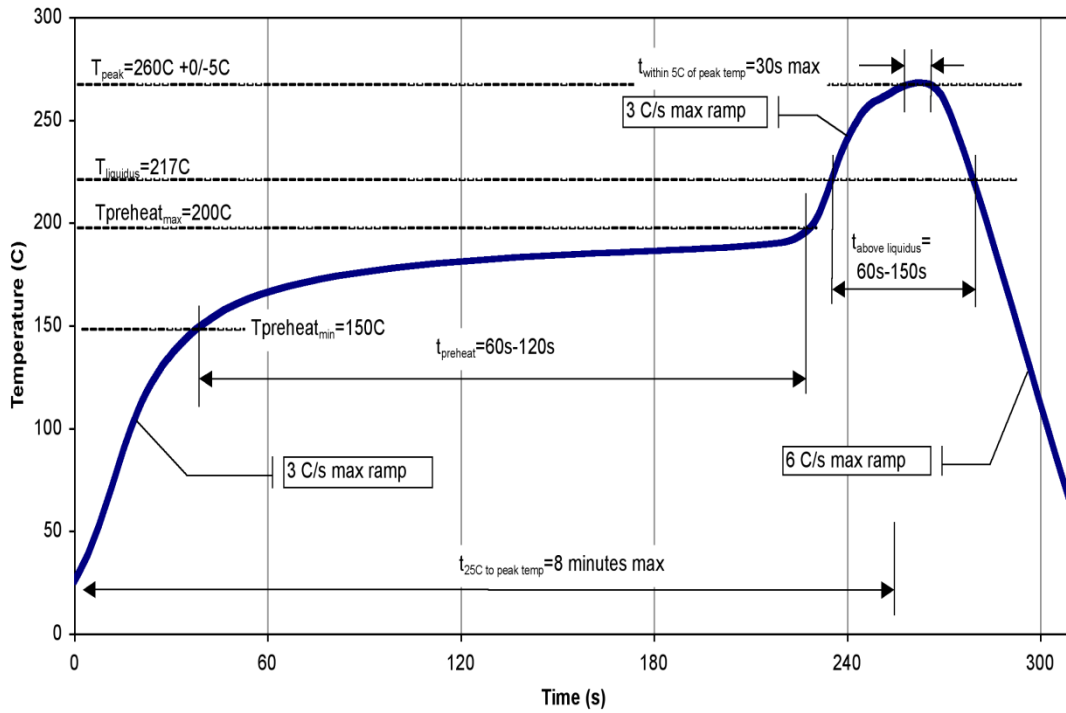

## Handling Precautions

Parameter	Rating	Standard
ESD – Human Body Model (HBM)	Class 1B	JEDEC/JESD22-A114
MSL – Moisture Sensitivity Level	MSL3	IPC/JEDEC/J-STD-020



Caution!  
 ESD-Sensitive Device

## Solderability

Compatible with both lead-free (260 °C max. reflow temp.) and tin/lead (245 °C max. reflow temp.) soldering processes. Solder profiles available upon request.

Contact plating: NiPdAu Au thickness is 0.00254 µm min.

## RoHS Compliance

This part is compliant with 2011/65/EU RoHS directive (Restrictions on the Use of Certain Hazardous Substances in Electrical and Electronic Equipment) as amended by Directive 2015/863/EU.

This product also has the following attributes:

- Lead Free
- Antimony Free
- TBBP-A (C<sub>15</sub>H<sub>12</sub>Br<sub>4</sub>O<sub>2</sub>) Free
- PFOS Free
- SVHC Free

## Contact Information

For the latest specifications, additional product information, worldwide sales and distribution locations, and information about Qorvo:

**Web:** [www.qorvo.com](http://www.qorvo.com)

**Tel:** 1-844-890-8163

**Email:** [customer.support@qorvo.com](mailto:customer.support@qorvo.com)

For technical questions and application information:

**Email:** [info-products@qorvo.com](mailto:info-products@qorvo.com)

## Important Notice

The information contained herein is believed to be reliable; however, Qorvo makes no warranties regarding the information contained herein and assumes no responsibility or liability whatsoever for the use of the information contained herein. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for Qorvo products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information. **THIS INFORMATION DOES NOT CONSTITUTE A WARRANTY WITH RESPECT TO THE PRODUCTS DESCRIBED HEREIN, AND QORVO HEREBY DISCLAIMS ANY AND ALL WARRANTIES WITH RESPECT TO SUCH PRODUCTS WHETHER EXPRESS OR IMPLIED BY LAW, COURSE OF DEALING, COURSE OF PERFORMANCE, USAGE OF TRADE OR OTHERWISE, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.**

Without limiting the generality of the foregoing, Qorvo products are not warranted or authorized for use as critical components in medical, life-saving, or life-sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.

Copyright 2019 © Qorvo, Inc. | Qorvo is a registered trademark of Qorvo, Inc.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Qorvo:

[TGF2965-SM](#) [TGF2965-SM-EVB](#)