# **Infrared Light Emitting Diode OP205CL**

. . . . . . . . . . . . .



# Features:

- High power GaAlAs
- Narrow beam angle—near parallel beam
- 875 nm wavelength
- TO-46 package
- Wide operating temperature range



## **Description:**

The OP205CL is a high efficiency GaAIAs infrared LED mounted in a TO-46 metal can package. The device features a special dome lens that allows a very narrow beam angle. The result is a near parallel beam that is useful in applications that requires a collimated light source with a uniform intensity pattern.


OP205CL LED is mechanically and spectrally matched to OP800 series phototransistors.


# **Applications:** · Optical encoders

Triangulation sensors

Long distance sensing

Ordering Information							
Part Number	LED Peak Wavelength	Total Beam Angle	Lead Length				
OP205CL	875 nm	10°	34mm				

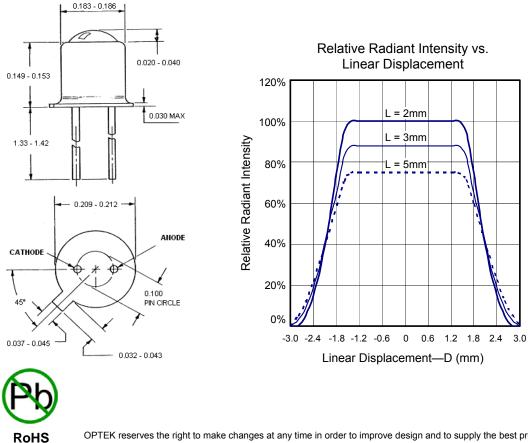



OPTEK reserves the right to make changes at any time in order to improve design and to supply the best product possible.



#### Absolute Maximum Ratings T<sub>A</sub> = 25° C unless otherwise noted

Storage Temperature Range	-40° C to +125° C
Operating Temperature Range	-40° C to +100° C
Lead Soldering Temperature	260° C <sup>(1)</sup>
Reverse Voltage	3.0 V
Continuous Forward Current	50 mA
Power Dissipation	160 mW <sup>(2)</sup>

### Electrical Characteristics (T<sub>A</sub> = 25°C unless otherwise noted)


SYMBOL	PARAMETER	MIN	ТҮР	MAX	UNITS	CONDITIONS
Po	Radiant Intensity	8.5	12.0	-	mW	$I_{F} = 50 \text{mA}^{(3)}$
V <sub>F</sub>	Forward Voltage	-	-	2.0	V	I <sub>F</sub> = 50mA
I <sub>R</sub>	Reverse Current	-	-	10	μA	V <sub>R</sub> = 3.0V
λ <sub>P</sub>	Peak Emission Wavelength	-	875	-	nm	I <sub>F</sub> = 20mA
Θ <sub>ΗΡ</sub>	Total Emission Angle at Half Power Points	-	6	10	Deg.	I <sub>F</sub> = 20mA

Notes:

1. Solder time less than 5 seconds at temperature extreme.


2. De-rate linearly at 2.17 mW/° C above 25° C.

3. Total Optical Power (P<sub>0</sub>) is measured by OPTEK Technology equipment.

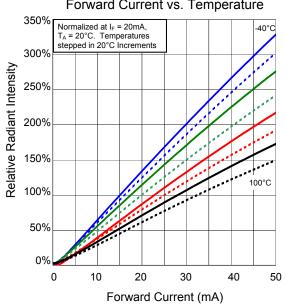

#### Relative Radiant Intensity vs. Forward Current vs. Temperature

#### Forward Voltage vs. Forward Current vs. Temperature

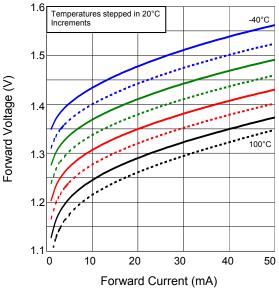

OPTEK reserves the right to make changes at any time in order to improve design and to supply the best product possible.

# **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TT Electronics: OP205CL