Panel Potentiometer

P140 Series




Features:


- 14 mm
- Conductive plastic element
- Dual unit
- With/without bushing
- Insulated shaft
- · RoHS compliant



Model Styles

Side Adjust, without Bushing	P140KV
Side Adjust, with Bushing	P140KV1
Top Adjust, without Bushing	P140KH
Top Adjust, with Bushing	P140KH1

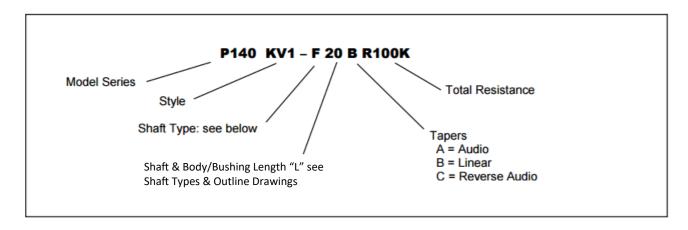

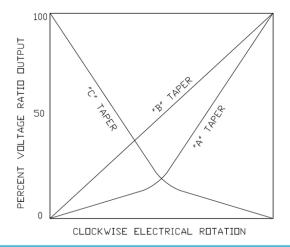

Panel Potentiometer

P140 Series



FIE	ctrica	i Sne	CITIC	ations
	oti iou	I UPL		utiviis

Resistance Range, Ohms	500-2M (for "B" taper) 1K-2M (for other tapers)
Standard Resistance Tolerance	± 20%
Residual Resistance	20 ohms max.
Input Voltage, maximum	50 Vac max.
Power rating, Watts	0.05w
Dielectric Strength	500Vac, I minute
Insulation Resistance, Minimum	100M ohms at 250Vdc
Sliding Noise	100mV max.
Gang Error (Multi-ganged)	-40dB – 0dB, ±3dB
Actual Electrical Travel, Nominal	260°

Mechanical Specifications

Total Mechanical Travel	300°± 10°
Static Stop Strength	70 oz-in
Rotational Torque	0.5 to 1.25 oz-in

Environmental Specifications


Operating Temperature Range	-20°C to +70°C
Rotational Life	30,000 cycles

Issue D 06/2021 Page 2

P140 Series



Shaft Types

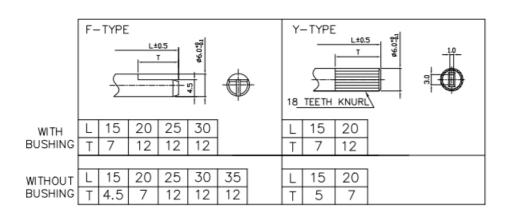

Standard Resistance Values, Ohms


=00	417	017	-1/	4017	001/	FOL	40017	00017	FOOL	1MEG	
500	1K	7K	hK	10K	20K	SOK	100K	200K	SOOK	1 N/I → (-)	

P140 Series




Outline Drawings

Model P140KV (Side Adjust, without Bushing)

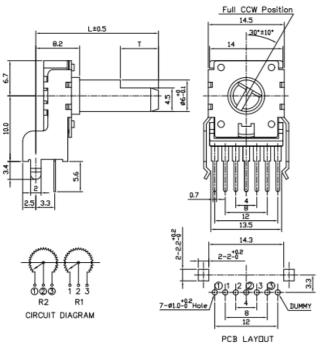


Model P140KV1 (Side Adjust, with Bushing)

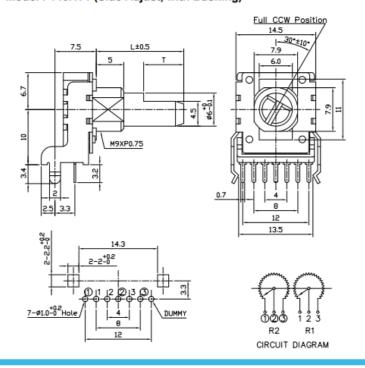




Outline Drawings

Model P140KH (Top Adjust, without Bushing)

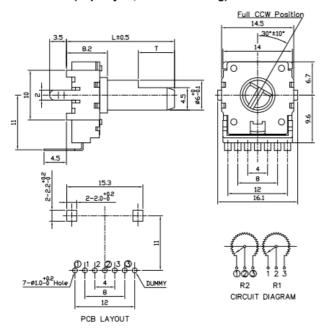

Model P140KH1 (Top Adjust, with Bushing)

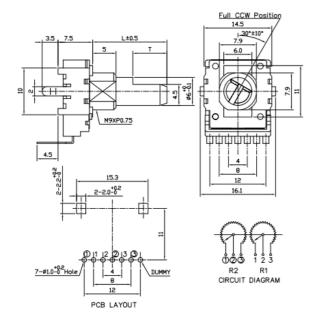

Issue D 06/2021 Page 5

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TT Electronics:

P140KH1-20AR20K P140KV1-005A P140KV1-005B P140KH1-Y20AR20K