Open Type Trimmer

Model 36

Features:

- 6 mm single turn
- Open frame
- Cermet
- RoHS compliant





Model Styles Available

Top Adjust	36F
Side Adjust	36K
Side Adjust	36W
Top Adjust (2.5 mm pin spacing)	36P

Electrical

Resistance Range	100 to 1 MEG Ohms
Standard Resistance Tolerance	± 20%
Input Voltage, Maximum	100 V
Power rating, Watts	0.3 @ 70°C
End Resistance, Maximum	<500 ohms: 10 Ohms Max; > 500 ohms: 2% Max.
Actual Electrical Travel	215° ±5°
Insulation Resistance, Minimum	100 Megohms
Resolution	Essentially infinite
Contact Resistance Variation	5% Max.
Temperature Coefficient of Resistance	±250 ppm/°C

Mechanical

Mechanical Travel	240° ±20°
Rotational Torque	30 to 300 gf.cm
Weight, Approx.	0.01 oz.
Wiper Position	Approx. 50%
Mechanical Stop Strength	0.5K gf.cm Min.

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.


TT Electronics | BI Technologies 413 Rood RD, Suite 7 Calexico, CA 92231 Ph: + 1 (714) 447-2345 www.ttelectronics.com/bi-technologies Issue C 04/2019 Page 1

Open Type Trimmer

Electronics

Model 36

Environmental		
Operating Temperature Range	-30°C to +100°C	
Rotational Life, 50 Cycles	±10% DR	
Load Life, 0.3W, 500 Hours, 70°C	±5% DR	
Resistance to Solder Heat	260°C for 3 sec.	
Aqueous cleaning not recommended		

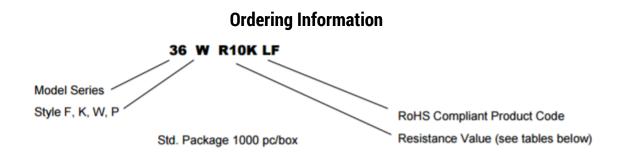

Circuit Diagram

Standard Resistance Values, Ohms

Resistance (ohms)	Part Marking
100	12
200	22
500	52
1K	13
2K	23
5K	53
10K	14
20K	24
50K	54
100K	15
200K	25
500K	55
1MEG	16

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

TT Electronics | BI Technologies 413 Rood RD, Suite 7 Calexico, CA 92231 Ph: + 1 (714) 447-2345 www.ttelectronics.com/bi-technologies Issue D 04/2019 Page 2

Open Type Trimmer


Model 36





Outline Drawings

Model 36K (Side Adjust)












0.8













Model 36W (Side Adjust)








Model 36P (Top Adjust)



3.7





5±0.2 2.5±0.2 3×ø1.0:02 HOLES

PCB MOUNTING PATTERN

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

TT Electronics | BI Technologies 413 Rood RD, Suite 7 Calexico, CA 92231 Ph: + 1 (714) 447-2345 www.ttelectronics.com/bi-technologies Issue D 04/2019 Page 3

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TT Electronics:

36KR200KLF 36FR10KLF 36FR50KLF 36KR1KLF 36PR1KLF 36PR10KLF 36PR5KLF 36WR10KLF 36PR500LF 36WR2KLF 36KR500LF 36KR10KLF 36WR500LF 36WR20KLF 36PR20KLF 36PR2KLF 36WR200LF 36KR50KLF 36PR200LF 36WR100KLF 36KR20KLF 36KR100LF 36KR100KLF 36KR500KLF 36KR200LF 36PR50KLF 36WR50KLF 36KR5KLF 36WR500KLF 36PR1MEGLF 36WR1MEGLF 36WR100LF 36KR1MEGLF 36WR5KLF 36PR100LF 36PR10KLF 36WR200KLF 36KR2KLF 36PR200KLF 36WR1KLF