


Near Infrared Light Ring Series

OPA80 and OPA83 Series



Features

- Designed for Near Infrared wavelength Cameras
- Daylight Light sensor available
- Variety of ring sizes
- Surface Mount or Through Hole Emitters

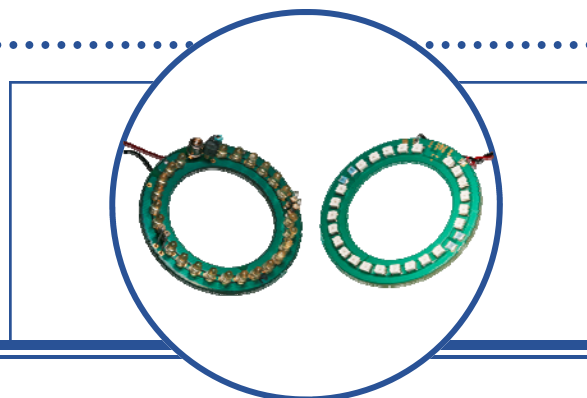

Description:

The OPA80 through OPA83 series are designed to easily illuminate an area with infrared light for a variety of uses including security cameras, spot lighting, etc..

The light ring can be purchased with an ambient light sensing device for minimal current drain during high ambient light conditions. This is great for battery usage and for security cameras during daylight.

A choice of through hole and surface mount LED packages, near infrared wavelength and ring sizes are available.

Custom mounting, electrical, cabling and connectors are available. Contact your local representative or OPTEK for more information.

Applications include:

- Security camera lighting
- Spot lighting
- Flash lighting

Ordering Information

		W	5	Y	Z		
Type of Optical component Package = W						Z = Meets RoHS requirements	
Through Hole - 3 mm package T3						Qty of LEDs	
Surface Mount - SM				Y = Ring Size ID & OD		12 Volt	5 Volt
				A .625" ID & 1.25" OD		12	10
				B 1.0" ID & 1.75" OD		18	16
				C 1.25" ID & 2.0" OD		18	16
				D 1.5" ID & 2.25" OD		24	20
Near IR 850 nm center wavelength = 5							

Absolute Maximum Ratings ($T_A = 25^\circ \text{C}$ unless otherwise noted)

Storage Temperature	-40° C to +100° C
Operating Temperature	-40° C to +85° C
Lead Soldering Temperature (1/16" (1.6mm) from case for 5 seconds with soldering iron)	260° C ⁽¹⁾
Reverse Voltage per Emitter	2.0 V
Continuous Forward Current	50 mA
Peak Forward Current (2 μs pulse width, 0.1% duty cycle)	1.0 A


Notes:

(1) RMA flux is recommended. Duration can be extended to 10 seconds maximum when flow soldering.


Electrical Characteristics ($T_A = 25^\circ \text{C}$ unless otherwise noted)

SYMBOL	PARAMETER	MIN	TYP	MAX	UNITS	CONDITIONS
V_F	Forward Voltage (each LED)					
	850 nm LED	1.20	1.35	1.80	Volts	$I_F = 20 \text{ mA}$
$2 \frac{1}{2} \text{IH-H}$	Viewing Angle (at 50% power points, each component)					
	3 mm—T3 Package	—	18°	—	Deg.	Total inclusive angle at 50% of maximum optical power.
	Surface Mount—SM Package	—	25°	—	Deg.	
V_{CC}	Power Supply Voltage OPA80, OPA81 OPA82, OPA83	11 4.5	12 5.0	13 5.5	Volts	I_{CC} varies with V_{CC}

OPBA80 & OPBA82 Series

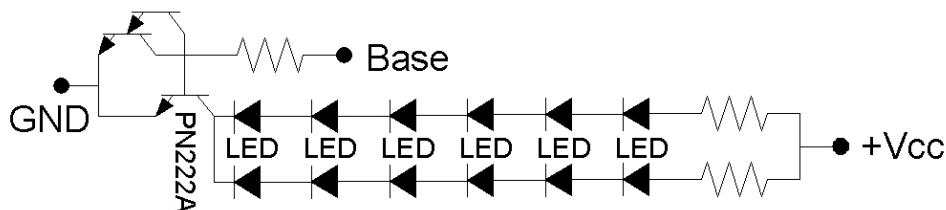


OPBA81 & OPBA83 Series




OPTEK reserves the right to make changes at any time in order to improve design and to supply the best product possible.

PCBoard Layout

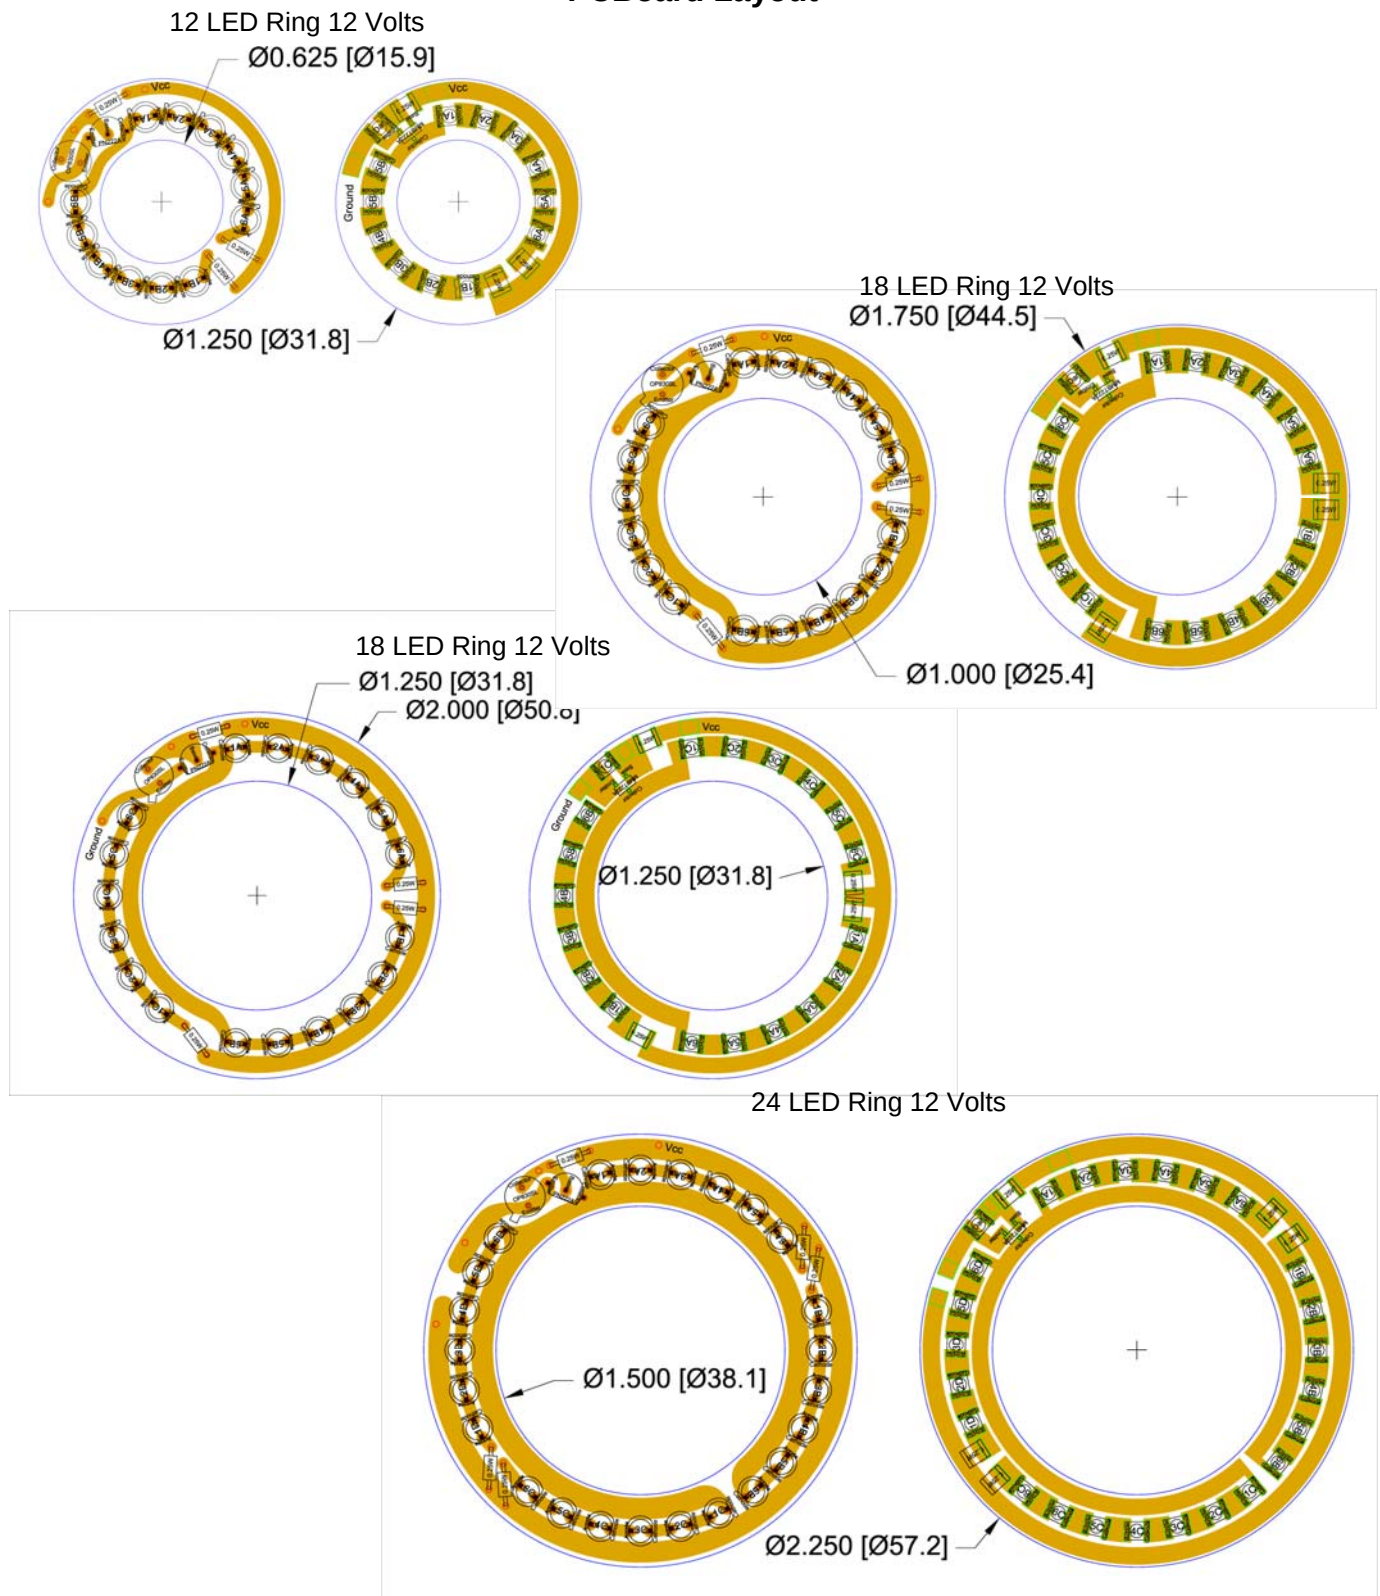

OPTEK reserves the right to make changes at any time in order to improve design and to supply the best product possible.

PCBoard Layout

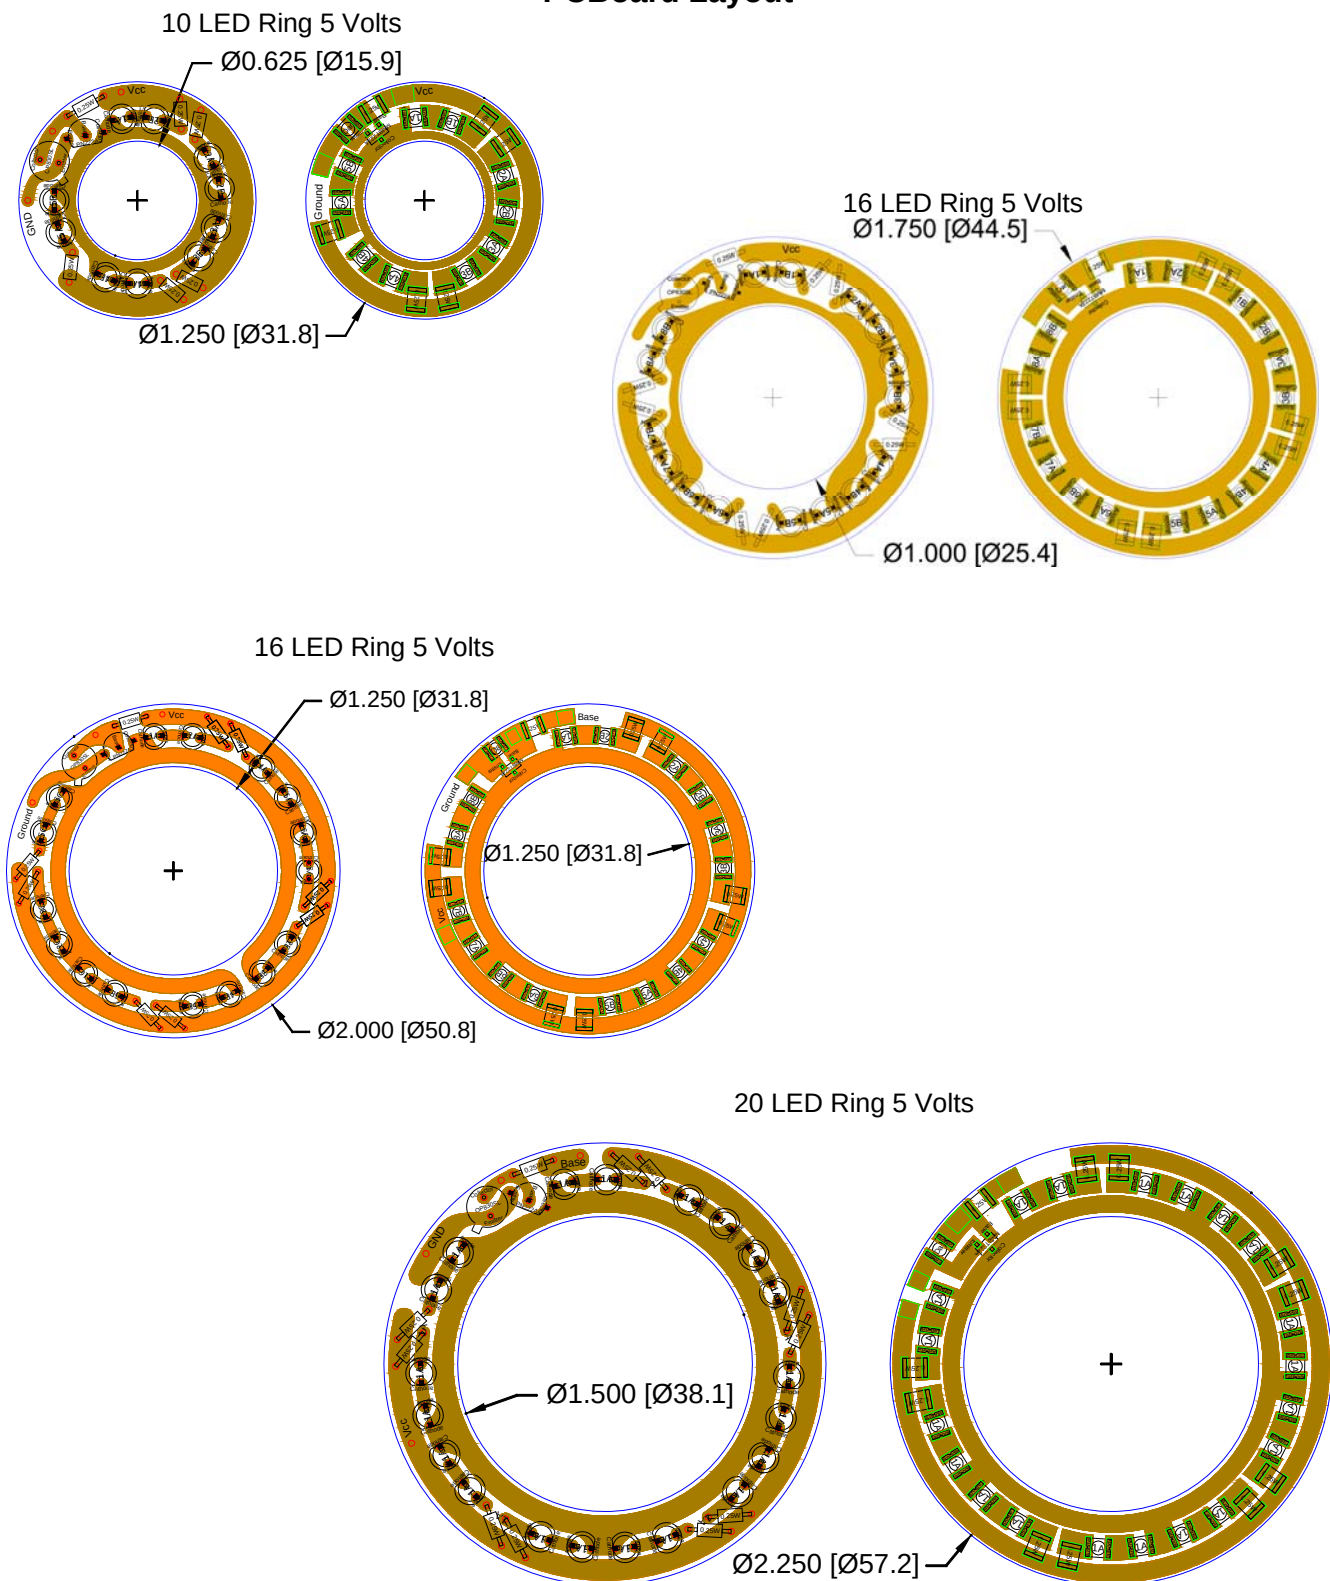

OPTEK reserves the right to make changes at any time in order to improve design and to supply the best product possible.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TT Electronics:](#)

[OPA80T35CZ](#)