

SMD LVPECL CX0 5.0 x 3.2 x 1.2 mm CB Series

Oscillators
Series

Features

- 3rd overtone solution.
- 3.3V and 2.5V operation available.
- LVPECL output, output frequencies 50 MHz to 200 MHz.
- Excellent low phase noise and jitter.
- Tri-State function available.
- Applications : Fibre Channel, Gigabit Ethernet, Serial ATA, Serial Attached SCSI, PCI-Express, SDH / SONET.
- RoHS Compliant / Pb Free.




Electrical Specifications

Item / Type	CB
Output Type	LVPECL
Output Load	50 Ω to VDD - 2 V
Oscillation Mode	3rd Overtone
Supply Voltage	2.5 V , 3.3 V
Frequency Range	50 ~ 200 MHz
Overall Frequency Stability *	± 50 ppm
Operating Temperature Range	- 40 ~ + 85 $^{\circ}\text{C}$
Storage Temperature Range	- 55 ~ + 125 $^{\circ}\text{C}$
Voltage Vol (Max.) / Voh (Min.)	VDD - 1.62 V / VDD - 1.025 V
Rise (Tr) / Fall (Tf) Time (20 % ~ 80 %)	1 ns Max.
Supply Current	80 mA Max.
Symmetry	45 ~ 55 %
Start-up Time	10 ms Max.
Phase Jitter (12 KHz ~ 20 MHz)	1 ps Max.

* Inclusive of frequency tolerance at 25 $^{\circ}\text{C}$, variation over temperature, supply voltage variation, aging and vibration.


Dimensions

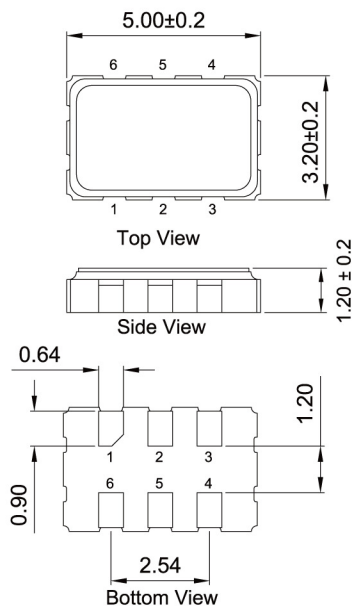

PAD FUNCTION:

- 1: ENABLE CONTROL or TC
- 2: ENABLE CONTROL or TC
- 3: GND
- 4: OUT
- 5: $\overline{\text{OUT}}$
- 6: VDD

* :External high frequency power supply decoupling required.

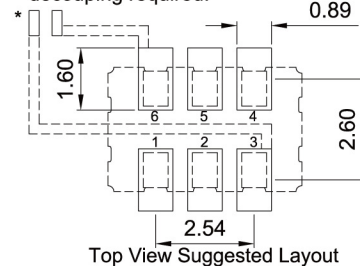

Units: mm

Remark : Specification subject to change without prior notice. Please confirm with our sales.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TXC Corporation:](#)

[CB-125.000MBE-T](#) [CB-156.000MBE-T](#) [CB-133.330MBE-T](#) [CB-150.000MBE-T](#) [CB-100.000MBE-T](#) [CB-156.250MBE-T](#)