




CODE 30 - HEAT SHRINK BOOT BACKSHELL

211M914-19C-D

SERIES _____
 SHELL SIZE (TABLE 1) _____
 MATERIAL _____
 REFER TO CH00-0250-004
 FINISH _____
 REFER TO CH00-0250-004
 MODIFICATION CODE _____
 REFER TO CH00-0250-004 (2)

NOTES:

1. THIS PRODUCT IS DESIGNED TO TERMINATE A HEAT SHRINKABLE LIPPED BOOT TO A CONNECTOR.
- (2) FOR ADDITIONAL DIMENSIONS, ORDERING INFORMATION AND MODIFICATIONS, SEE CH00-0250-004.
3. BACKSHELL TO BE PERMANENTLY MARKED/BAGGED AND LABELLED WITH CODE IDENTIFICATION NUMBER AND PART NUMBER. (e.g. 06090-211M914-19C).
- (4) KNURL INSIDE BOOT GROOVE MAY BE SUPPLIED AT MANUFACTURER'S OPTION.
5. BACKSHELL MATES TO MIL-C-28840, CLASS A, B, C, & E: M28840/10, /11, /14 & /16 CONNECTORS.

If this document is printed it becomes uncontrolled. Check for the latest revision

DRAWN	K.WINCZURA	DATE 07/05/2015	 3RD ANGLE PROJECTION NOT TO SCALE	TITLE: HEAT SHRINK BOOT BACKSHELL		 Polamco 			
CHECKED		07/05/2015							
APPROVED	K.SHEPPARD	08/05/2015		ASSY USED ON: MIL-C-28840, CLASS A, B. C, & E: M28840/10, /11, /14 & /16 CONNECTORS					
APPROVED	H.SMITH	24/06/2015							
UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS IN MILLIMETRES GENERAL TOL LINEAR +/-0.25MM ANGULAR +/- 1°									
REVISIONS									
LTR	DESCRIPTION		DATE	APPROVED					
F	REVISED PER ECN AD93049								
G	REVISED PER ECO-15-009385		24/06/2015	H.SMITH					
TE CAGE CODE: 06090 POLAMCO/TE CAGE CODE: U5792				TE CONNECTIVITY - POLAMCO LTD RESERVES THE RIGHT TO AMEND THIS DRAWING AND THE INFORMATION SET FORTH HEREON AT ANY TIME. USERS SHOULD INDEPENDENTLY EVALUATE THE SUITABILITY OF THE PRODUCT FOR THEIR APPLICATION.			DRAWING NO: 211M9XX	DRAWING REV: G	SHT 1

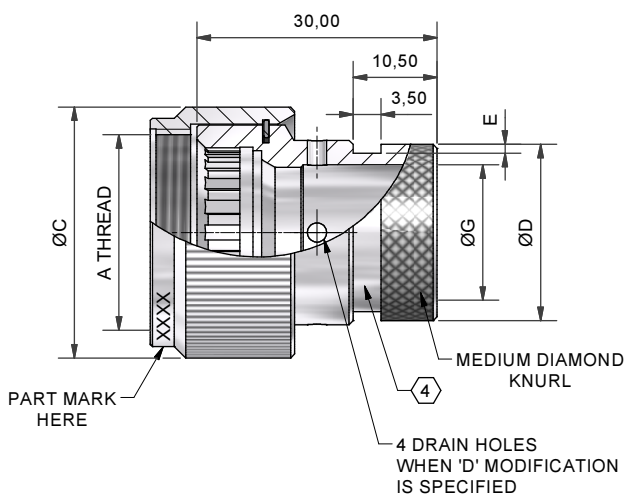



TABLE 1

BASE PART NUMBER	SHELL SIZE COM'L / MIL	A THREAD	ØC MAX	ØD MAX	E +0,20/-0,00	ØG MIN
211M912	13 / B	7/8 - 20UNEF	29,7	18,9	1,12	13,8
211M914	15 / C	1 - 20UNEF	31,3	22,0	1,12	16,9
211M916	17 / D	1 1/8 - 18 UNEF	35,5	24,1	1,12	19,0
211M918	19 / E	1 1/4 - 18UNEF	38,7	28,0	1,75	22,4
211M922	23 / F	1 7/16 -18UNEF	43,6	34,5	1,75	28,4
211M924	25 / G	1 9/16 -18UNEF	47,2	36,8	1,75	30,7
211M928	29 / H	1 7/8 - 16UN	55,2	42,9	1,75	36,8
211M932	33 / J	2 1/16 -16UN	60,5	47,9	2,20	41,7

If this document is printed it becomes uncontrolled. Check for the latest revision

DRAWN	K.WINCZURA	DATE	07/05/2015	 3RD ANGLE PROJECTION NOT TO SCALE UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS IN MILLIMETRES GENERAL TOL LINEAR +/-0,25MM ANGULAR +/- 1°	TITLE: HEAT SHRINK BOOT BACKSHELL			 Polamco TE connectivity	
CHECKED		07/05/2015							
APPROVED	K.SHEPPARD	08/05/2015							
APPROVED	H.SMITH	24/06/2015							
REVISIONS					ASSY USED ON: MIL-C-28840, CLASS A, B, C, & E: M28840/10, /11, /14 & /16 CONNECTORS				
LTR	DESCRIPTION	DATE	APPROVED						
F	REVISED PER ECN AD93049								
G	REVISED PER ECO-15-009385	24/06/2015	H.SMITH						
TE CAGE CODE: 06090 POLAMCO/TE CAGE CODE: U5792				TE CONNECTIVITY - POLAMCO LTD RESERVES THE RIGHT TO AMEND THIS DRAWING AND THE INFORMATION SET FORTH HEREON AT ANY TIME. USERS SHOULD INDEPENDENTLY EVALUATE THE SUITABILITY OF THE PRODUCT FOR THEIR APPLICATION.			DRAWING NO: 211M9XX	DRAWING REV: G	SHT 2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[211M914-19B](#)