


Technical drawing of a cross-section of a bullet. The drawing shows a central core with a serrated interface. Dimensions and markings are as follows:



- Overall length: 21.5 ± 0.5
- Core length: 7.80
- Markings on the core: "SERRATION." and "TRADE MARK."
- Markings on the jacket: "PMA" and "1"

Technical drawing of a U-shaped part. The drawing shows a cross-section of a U-shaped component. The width of the top flange is dimensioned as 3.0 ± 0.4 . The height of the side wall is dimensioned as 3.5 ± 0.4 . The bottom of the U-shape is rounded. A dashed circle indicates the internal profile of the U-shape.

SECTION "B-B"
(SCALE=10/1)

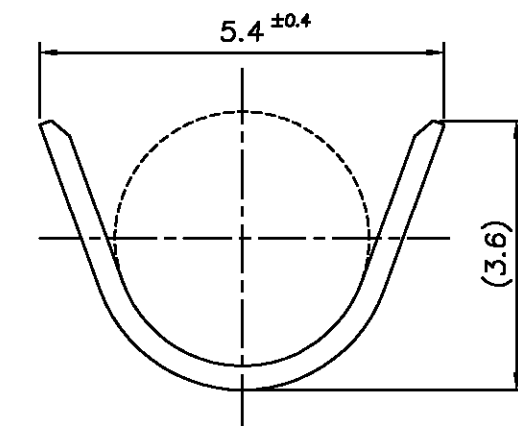

SECTION "C-C"
(SCALE=10/1)

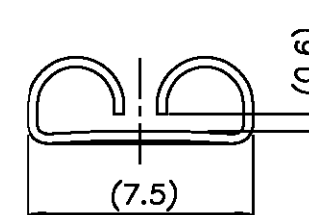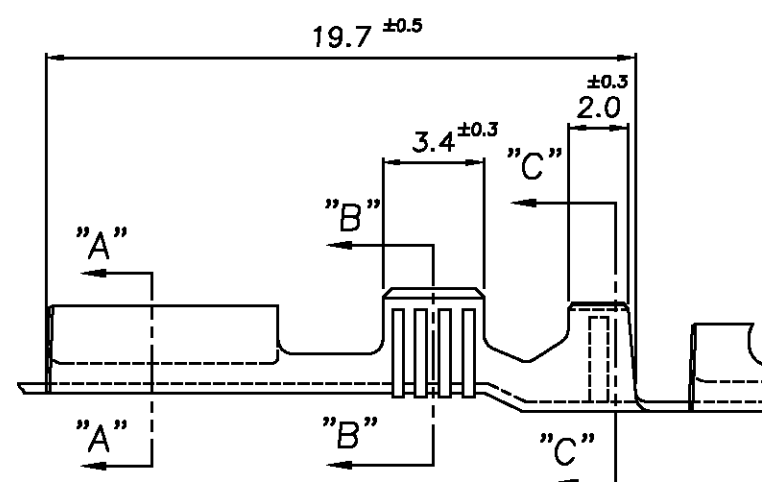

SECTION "A-A"

- 2 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING
PER D.RENAUD/D.SINISI

2	OBSELETE		368078-3
		TIN PLATING	BRASS (0.32t)
		BRIGHT DIPPING & OILLING	368078-2
		FINISH	368078-1
		MATERIAL	PART NUMBER

O1	ECO-09-026346	KK	AEG	27NOV
O	RELEASED (RD 96-282)	YM	CS	SEP '96
LTR	REVISION RECORD	DR	CHK	DAT

© 1996 AMP MFG KOREA
ALL RIGHT RESERVED AMP PRODUCTS COVERED BY PATENTS
AND OR PATENTS PENDING

AMP AMP MFG KOREA

WIRE RANGE #18 ~ #16 (0.85 ~ 1.25 mmSQ)	INSULATION DIA 1.81 ~ 2.2mm	NAME "250"SERIES RECEPTACLE WITHOUT LATCH FOR SEALED CONNECTOR.			
MATERIAL SEE TABLE	FINISH/COLOR SEE TABLE	TOLERANCES ±0.4	SIZE A3	LOC DS	NUMBER 3 6 8 0 7 8
DR	APP		SCALE 4/1	REV 01	SHEET 1-1
CHK	REL				

PRINT DIST.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[368078-1](#)