


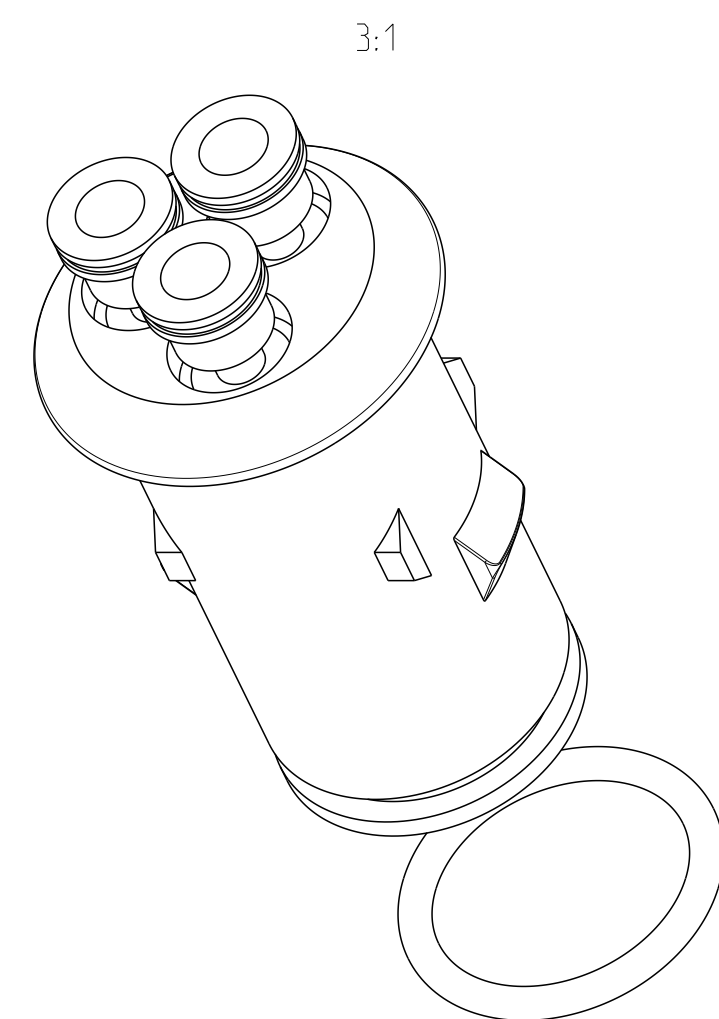

Bemerkungen / Notes:

1. Teile in Lupolenbeutel luftdicht verpackt (500/1000 Stck.)
Parts must be airtight packaged in bags of lupolen (500/1000 pieces)

2 Geschmiert mit Gleitmittel Hellerine (Fa. Hellermannntyton)
direkt vor dem Einsetzen des Kontaktes
Lubricated with Hellerine 625 (Hellermannntyton) right before contact insertion

3 Kammer für Buschsenkontakt CIC, C1-2 od. Type III
Cavity for socket contact CIC, C1-2 or Type III

4 Dichtungsstülpe für Litzenleitung mit
Isolationsdurchmesser von 2.3-3.0mm
Seal for wire with isolation diameter 2.3 - 3.0 mm 10

Dichtungsstülpe für Litzenleitung mit
Isolationsdurchmesser von 1.3-2.3 mm
Seal for wire with isolation diameter 1.3 - 2.3 mm


 Keying Form with the Mating Connector: Click Stop

6 Keying Form with the Mating Connector: Locking

H2	OBSOLETE	2-826886-2	H	SEAL  O-RING	NEOPRENE	GREY	3	2.1
				3 POS. SOCKET HOUSING	PA 6.6 GFV13	BLACK	1	3
						GREEN	1	4
		2-826886-1	H	SEAL  O-RING	NEOPRENE	BLACK	3	2.2
				3 POS. SOCKET HOUSING	PA 6.6 GFV13	NATURAL	1	4
		1-826886-9	H	SEAL  O-RING	NEOPRENE	GREY	3	2.1
				3 POS. SOCKET HOUSING	PA 6.6 GFV13	NATURAL	1	4
		1-826886-8	H	SEAL  O-RING	NEOPRENE	BLACK	3	2.2
				3 POS. SOCKET HOUSING	PA 6.6 GFV13	BLACK	1	4
		1-826886-7	H	SEAL  O-RING	NEOPRENE	BLACK	3	2.2
				3 POS. SOCKET HOUSING	PA 6.6 GFV13	BLACK	1	3
		1-826886-4	H	SEAL  O-RING	NEOPRENE	GREY	3	2.1
				3 POS. SOCKET HOUSING	PA 6.6 GFV13	BLACK	1	3
		1-826886-3	H	SEAL  O-RING	NEOPRENE	GREY	3	2.1
				3 POS. SOCKET HOUSING	PA 6.6 GFV13	BLACK	1	3
		1-826886-2	H	SEAL  O-RING	NEOPRENE	GREY	3	2.1
				3 POS. SOCKET HOUSING	PA 6.6 GFV13	BLACK	1	3
		1-826886-1	H	-	-	-	-	-
				3 POS. SOCKET HOUSING	PA 6.6 GFV13	BLACK	1	3
		826886-7	H	SEAL  O-RING	NEOPRENE	BLACK	3	2.2
				3 POS. SOCKET HOUSING	PA 6.6 GFV13	BLACK	1	3
		826886-6	H	SEAL  O-RING	NEOPRENE	GREY	3	2.1
				3 POS. SOCKET HOUSING	PA 6.6 GFV13	BLACK	1	3
		826886-5	H	SEAL  O-RING	NEOPRENE	YELLOW	1	1
				3 POS. SOCKET HOUSING	PA 6.6 GFV13	GREY	3	2.1
		826886-4	H	SEAL  O-RING	NEOPRENE	BLACK	1	3
				3 POS. SOCKET HOUSING	PA 6.6 GFV13	RED	1	3
						GREY	3	2.1
						BLACK	1	3
						BLACK	1	1
						-	-	-
						BLACK	1	3
						BLACK	1	1
H4	OBSOLETE	826886-1	H	SEAL  O-RING	NEOPRENE	BLACK	1	3
				3 POS. SOCKET HOUSING	PA 6.6 GFV13	BLACK	1	1
	ASSY NO	REV.		DESCRIPTION	MATERIAL	COLOUR	QTY.	ITEM NO

ACHTUNG !
Eine einwandfreie Funktion dieser Stecker
kann nur bei Verwendung von Original-TEC
-Teilen und genauer Einhaltung der Ver-
arbeitungsvor - schriften garantiert werden.
CAUTION !

A faultless operation of this connectors can be guaranteed only if original TEC parts are used and exact observance of processing specifications.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 2101 T1982 ADAMSKI CWF 250C T1982 WENDLING APVD -		 TE Connectivity	
DIMENSIONS: mm 		TOLERANCES UNLESS OTHERWISE SPECIFIED: ISO 20mm 0 PLC ±- 1 PLC ±- 2 PLC ±- 3 PLC ±- 4 PLC ±- ANGLES ±1.5°		NAME 3POS. ECONOSEAL SOCKET-HOUSING ASS'Y - - SIZE CAGE CODE DRAWING NO. RESTRICTED TO A1 00779 C-826886 -	
MATERIAL SEE LIST FINISH -		WEIGHT - CUSTOMER DRAWING		SCALE 5:1 SHEET 1 of 1 REV H4	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[826886-7](#)