


## CABLE BREAKOUT BOOT, FOUR ENTRY

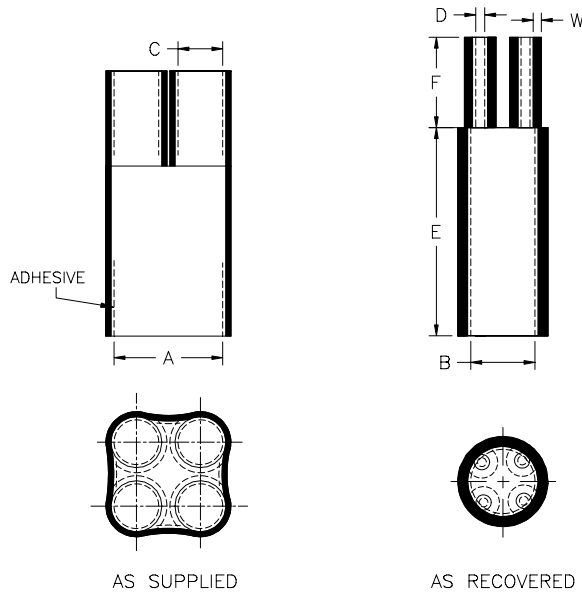


### Table of Dimensions, inch (mm):

PART NUMBER (See Note*)	Body ID		Leg ID		Length Recovered Min.		Rec'd. Wall Ref. (W)
	Min. Exp. (A)	Max. Rec'd (B)	Min. Exp. (C)	Max. Rec'd (D)	(E), Body	(F), Leg	
F3-9FR	0.90 (23)	0.43 (11)	0.28 (7)	0.11 (3)	2.0 (51)	0.8 (20)	0.05 (1.2)
F-23FR	1.25 (32)	0.80 (20)	0.50 (13)	0.19 (5)	2.3 (58)	1.0 (25)	0.09 (2.3)
F42-60FR	1.75 (44)	0.98 (25)	0.79 (20)	0.26 (7)	2.3 (58)	1.2 (30)	0.14 (3.6)
F75-100FR	2.35 (60)	1.00 (25)	1.00 (25)	0.35 (9)	2.8 (71)	1.7 (43)	0.14 (3.6)
F133-200FR	2.65 (67)	1.40 (36)	1.20 (30)	0.53 (13)	3.5 (89)	1.5 (38)	0.14 (3.6)
F150-400FR	5.25 (133)	3.00 (76)	1.35 (34)	0.55 (14)	5.0 (127)	3.0 (76)	0.13 (3.3)

**Note\*:** Add "NA" to the end of Part Number if no adhesive is required.

**Material:** Heat shrinkable boot material in accordance with -3 polyolefin

**Factory applied sealant:** Factory applied hot melt adhesive is standard.

 Raychem Products, North America Tyco Electronics Corporation 300 Constitution Drive Menlo Park, CA 94025 USA		Product Brand: <div style="text-align: center; font-weight: bold; font-size: 1.2em;">Raychem</div>				
<b>Specification Control Drawing</b>		Title: <div style="text-align: center; font-weight: bold;">CABLE BREAKOUT BOOT, FOUR ENTRY</div>				
		Size A	Cage Code 06090	Document No. <b>FXXX-XXXFR</b>		
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. METRIC DIMENSIONS ARE SHOWN IN BRACKETS		Tyco Electronics reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.		Rev.: B	Rev. Date: 25-Mar-03	
Drawn By: A.Ng	Org. Date: 03/17/03	Original file:		File : R030156.doc	Scale: None	Sheet: 1 of 1

If this document is printed it becomes uncontrolled. Check for the latest revision.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[F133-200-FR](#)