SAFETY ORGANIZATIONS

THIS FILTER HAS BEEN FORMALLY RECOGNIZED, CERTIFIED OR APPROVED BY THE LISTED AGENCY. THEREFORE, ALL TEST/REGUIREMENTS SPECIFIED IN THE LATEST REVISION OF THE FOLLOWING AGENCY STANDARDS HAVE BEEN MET:

UL RECOGNIZEO: UL 1283 CSA CERTIFIED: CSA C22.2 No. 8 VDE APPROVED: EN 60939-2

OPERATING SPECIFICATIONS

LINE CURRENT/VOLTAGE: 6 AMP, 120/250 VAC,

6 AMP/40°C, 250 VAC

LINE FREQUENCY:

50-60Hz

MAXIMUM LEAKAGE CURRENT,

EACH LINE TO GROUND:

2µA @ 120V 60Hz 5uA @ 250V 50Hz

OPERATING AMBIENT TEMP. RANGE: -10°C TO +40°C @ RATED CURRENT, Ir.

IN AN AMBIENT, I_0 , HIGHER THAN 40°C, THE MAXIMUM OPERATING CURRENT, I_0 , IS AS FOLLOWS: $I_0 = I_{\infty} - \sqrt{85 - T_0}$

 $I_0 = I_r - \sqrt{\frac{85 - T_0}{10}}$

RELIABILITY SPECIFICATIONS:

STORAGE TEMPERATURE: -40°C TO +85°C HIMIOITY: 21 DAYS @ 40°C 95% RH. CURRENT OVERLOAD TEST: 6 TIMES In FOR 8 SECONDS

CUSTOMER DRAWING CATALOG # PMOSODL6C ECN # | APPRVO. | DATE 09-013614 | ELCY 260CT09

TEST SPECIFICATIONS:

INDUCTANCE: 6.2 mH NOMINAL

CAPACITANCE: (NEASURED @ 1KHz, 0.250VAC MAX., 25°C±1°C)

LINE TO GROUND: LINE TO LINE:

N/A

2.0µF ±20%

DISCHARGE RESISTOR:

165K A

L/G AND L/L I.R. NO DISCHARGE RESISTOR:

6000Ma (MIN.) @ 100VDC,

20°C AND 50% RH


RECOMMENDED RECEIVING INSPECTION HIPOT:


LINE TO GROUND: 1500VAC DR 2250VDC FOR 1 MINUTE

1450VDC FOR 1 MINUTE LINE TO LINE:

FILTER APPROVAL:

THE BEST WAY TO SELECT AND QUALIFY A FILTER IS FOR YOUR ENGINEERING TO TEST THE UNIT IN YOUR EQUIPMENT.

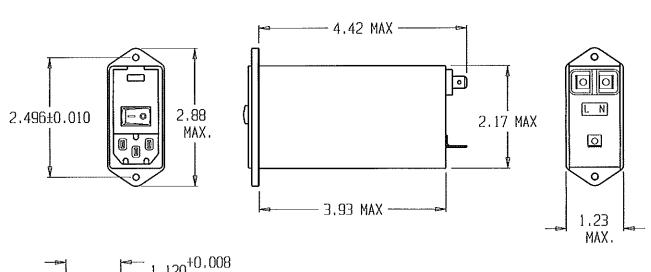



PANEL CUTOUT

	1 AXXX	
б >		₹ +
₩ ~~~	<u> 1 Luu</u>	

50A- 50A(MINIMUM) INSERTION LOSS							3		
FREDUENCY MHz	.01	. 05	. 10	. 15	.50	1.0	5.0	10.0	30.0
COMMON dB	8	21	27	29	34	35	25	21	16
DIFF. dB	10	15	34	44	75	75	75	70	60

THIRD ANGLE PROJECTION	0		
UNLESS OTH TOLERANCE MATERIAL &	10 8E ±.0)25	EO
THIS DEFERMATION IS OF TYCH BLECTRONICS CORPO AND AFFILIATES. IT MAY TYCH BLECTRONICS PERSO FROM TYCH BLECTRONICS HARRISSURG, PENSYLVAN	RATION AND IT: ' NOT BE DISCU NEL, VITHOUT I CORPORATION.	Vorlovice subsi Iseo to anydre ot	HER

S SUPPLIED	PUW.	Ŀĸ
OPRIETARY TO	TYCO ELECTRON	IICS PAR
PLINIOE SUBSIDIARIES TO ANYDE OTHER TRAN TEN AUTHORIZATION	ZEALE: NILZ	DATE; 284A
	DRY. BY:	DRIG:

² Tyco Electronics CORCON PRODUCTS, 620 S. BUTTERFIRLD RD. MUNOELEIN IL 60060

LINE FILTER

TYCO ELECTRONICS PART NO. 2-1609109-1					
STALE: NTS	DATE:	CATALOG NO.	REV.		
,	284AY08	nicoconi ac	ایا		
DRW. BY:	ORIG:	PMOSODL6C	A		
20	e ac				

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TE Connectivity:

PM0S0DL6C