
SPECIFICATION CONTROL DRAWING

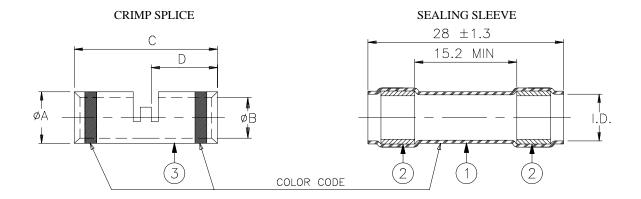

Product Rev.		Splice/	Crimp Splice				Total	Area of	Sealing Sleeve		
Product		Sleeve	øΑ	øΒ	C	D	Conductor Accommodation		Min. I.D.	ø MAX	
Name		Color Code	±0.08	± 0.05	±0.25	±0.25	mm^2	mm ² CMA		Fully Recovered	
W-095-01	Α	Red	1.96	1.22	12.7	5.79	0.2 - 0.6	410 - 1230	2.16	0.63	
W-095-02	Α	Blue	2.62	1.70	14.61	6.86	0.6 - 1.4	1180 - 2770	2.79	0.63	
W-095-03	В	Yellow	3.81	2.54	14.61	6.86	1.25 - 3.0	2650 - 5720	4.32	0.63	

For possible wire combinations, refer to table given below in sq. mm and circular mil area for ISO stranded conductors.

AWG	24	22	20	18	16	14	12
Number and	19/0.118	19/0.15	19/0.2	19/0.25	19/0.30	37/0.25	37/0.315
ø of Strands							
Area mm ²	0.25	0.4	0.6	1	1.25	1.82	2.89
Area circ.	475	754	1216	1900	2426	3700	5720
mils							

MATERIALS

- 1. INSULATION SLEEVE: Heat-shrinkable, radiation cross-linked modified polyvinylidene fluoride. Color: see table.
- 2. MELTABLE SEALING RINGS: Thermally stabilized thermoplastic.
- 3. CRIMP SPLICE: Copper Alloy 101 or 102 per WW-T-775, nickel plated per QQ-N-290.

APPLICATION

- 1. This device provide an immersion resistant sealed in-line crimp splice for single wire splicing. Multiple in-line assemblies are also possible within the size range shown in the table above.
- 2. It is suitable for use with wire whose insulation is rated at 125°C minimum.
- 3. The device is rated at 150°C.
- 4. For installation procedure, see RPIP-685-00.

Raychem			DEVICES 300 Cor		nem Corporation constitution Drive o Park, CA 94025 USA		CRIMP SPLICE, IN-LINE, SEALED				
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS.							DOCUMENT NO.: W-095-01/-02/-03				
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ROUGH MICROI	NESS IN	any time. Users	Raychem reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.			DCR NUM	BER: D981383	REPLACES: D971579		
DRAWN BY: I M. FORONDA		DAT	E: 09/17/98	PROD. REV.: 98 SEE TABLE		DOC	S ISSUE: 6	SCALE: None	SIZE:	SHEET: 1 of 1	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TE Connectivity: