

SPECIFICATION CONTROL DRAWING

WXA-0213TITLE WIRE, RADIATION-CROSSLINKED MODIFIED ETFE-INSULATED,
LIGHTWEIGHT, 600 VOLT

Date 12-1-06

Revision A

This specification sheet forms a part of the latest issue of Raychem Specification 55.

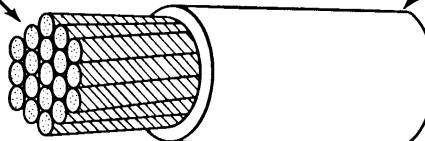
CONDUCTOR - SILVER-COATED HIGH STRENGTH
COPPER ALLOYINSULATION - RADIATION-CROSSLINKED,
MODIFIED ETFE

TABLE I. CONSTRUCTION DETAILS

PART NUMBER <u>1/</u>	WIRE SIZE (AWG)	CONDUCTOR STRANDING (number x AWG)	DIAMETER OF STRANDED CONDUCTOR (in.)					FINISHED WIRE	
					MAXIMUM RESISTANCE AT 20°C (ohms/1000 ft.)	DIAMETER (inches)	MAXIMUM WEIGHT (lb/1000 ft)		
			MINIMUM	MAXIMUM					
WXA-0213-22-*	22	154 x 44	.029	.033	23.0	.043 ± .003	2.9		

TABLE II. PERFORMANCE DETAILS

PART NUMBER <u>1/</u>	BEND TESTING			
	MANDREL DIAMETER (inch) (± 3%)		WEIGHT (lb) (± 3%)	
	IMMERSION, LIFE CYCLE AND ACCELERATED AGING		IMMERSION, LIFE CYCLE AND ACCELERATED AGING	
	COLD BEND		COLD BEND	
WXA-0213-22-*	.500		.750	
			.375	
			1.00	

WIRE RATINGS AND ADDITIONAL REQUIREMENTS

TEMPERATURE RATING: 200°C

Maximum continuous conductor temperature

VOLTAGE RATING: 600 volts (rms) at sea level

ACCELERATED AGING (Crosslinking Proof Test):

300 ± 3°C for 7 hours

BLOCKING: 230 ± 3°C for 24 hours

COLOR: White preferred

CONCENTRICITY: 70% (minimum)

FLAMMABILITY: Procedure 1, 3 seconds (maximum); 3 in. (maximum)

no flaming of facial tissue

HUMIDITY RESISTANCE:

Insulation Resistance, 5000 megohms for 1000 ft. (minimum)

IDENTIFICATION AND COLOR STRIPING DURABILITY:

125 cycles (250 strokes) (minimum), 500 g weight

IMMERSION: Diameter increase 5% (maximum),

no cracking, no dielectric breakdown

INSULATION ELONGATION AND TENSILE STRENGTH:

Elongation, 75% (minimum)

Tensile Strength, 5000 lbf/in² (minimum)

INSULATION FLAWS:

Spark Test, 5.7 kv (rms) at 3.0 kHz

Impulse Dielectric Test, 8.0 kV (peak)

INSULATION RESISTANCE:

5000 megohms for 1000 ft. (minimum)

INSULATION THICKNESS: 0.005 inch (minimum)

LIFE CYCLE: 230 ± 3°C for 500 hours

LOW TEMPERATURE COLD BEND: -65 ± 3°C for 4 hours

SHRINKAGE: 230 ± 3°C for 6 hours,

0.125 inch (maximum) in 12 inches

SMOKE TEST: 250 ± 5°C, no visible smoke

SURFACE RESISTANCE:

500 megohms-in. (minimum), both readings

THERMAL SHOCK RESISTANCE:

200 ± 3°C, .060 in. (maximum)

VOLTAGE WITHSTAND TEST (Post Environmental):

2500 volts (rms), 60 Hz

1/ PART NUMBER:

The "*" in the part numbers above shall be replaced by
color code designators.

Example: AWG 22, white: WXA-0213-22-9

Users should evaluate the suitability of this product for their application. Specifications are subject to change without notice.

Tyco Electronics also reserves the right to make changes in materials or processing, which do not affect compliance with any specification, without notification to Buyer.

1/ COLORS AND COLOR CODE DESIGNATORS SHALL BE IN ACCORDANCE WITH MIL-STD-681. OTHER CODES AND SUFFIXES MAY BE
ADDED TO THE PART NUMBER, AS NECESSARY, TO CAPTURE ANY ADDITIONAL REQUIREMENTS IMPOSED BY THE PURCHASE ORDER.

Page 1 of 1

DIMENSIONS ARE IN INCHES, AND UNLESS OTHERWISE DESIGNATED ARE NOMINAL.

THIS SPECIFICATION SHEET TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
REFERENCE DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.**tyco**
Electronics**Raychem** Wire & Cable
501 Oakside Avenue
Redwood City, CA 94063-3800
Phone: 1-800-227-8816
Fax: 1-650-361-6297

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[WXA-0213-22-9](#)