



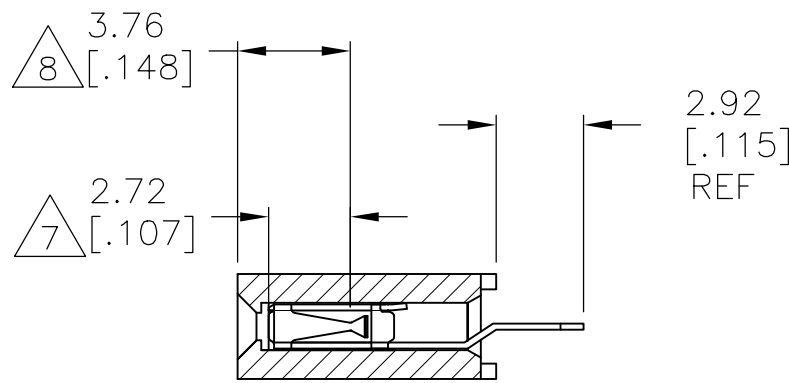


RECOMMENDED PC BD LAYOUT

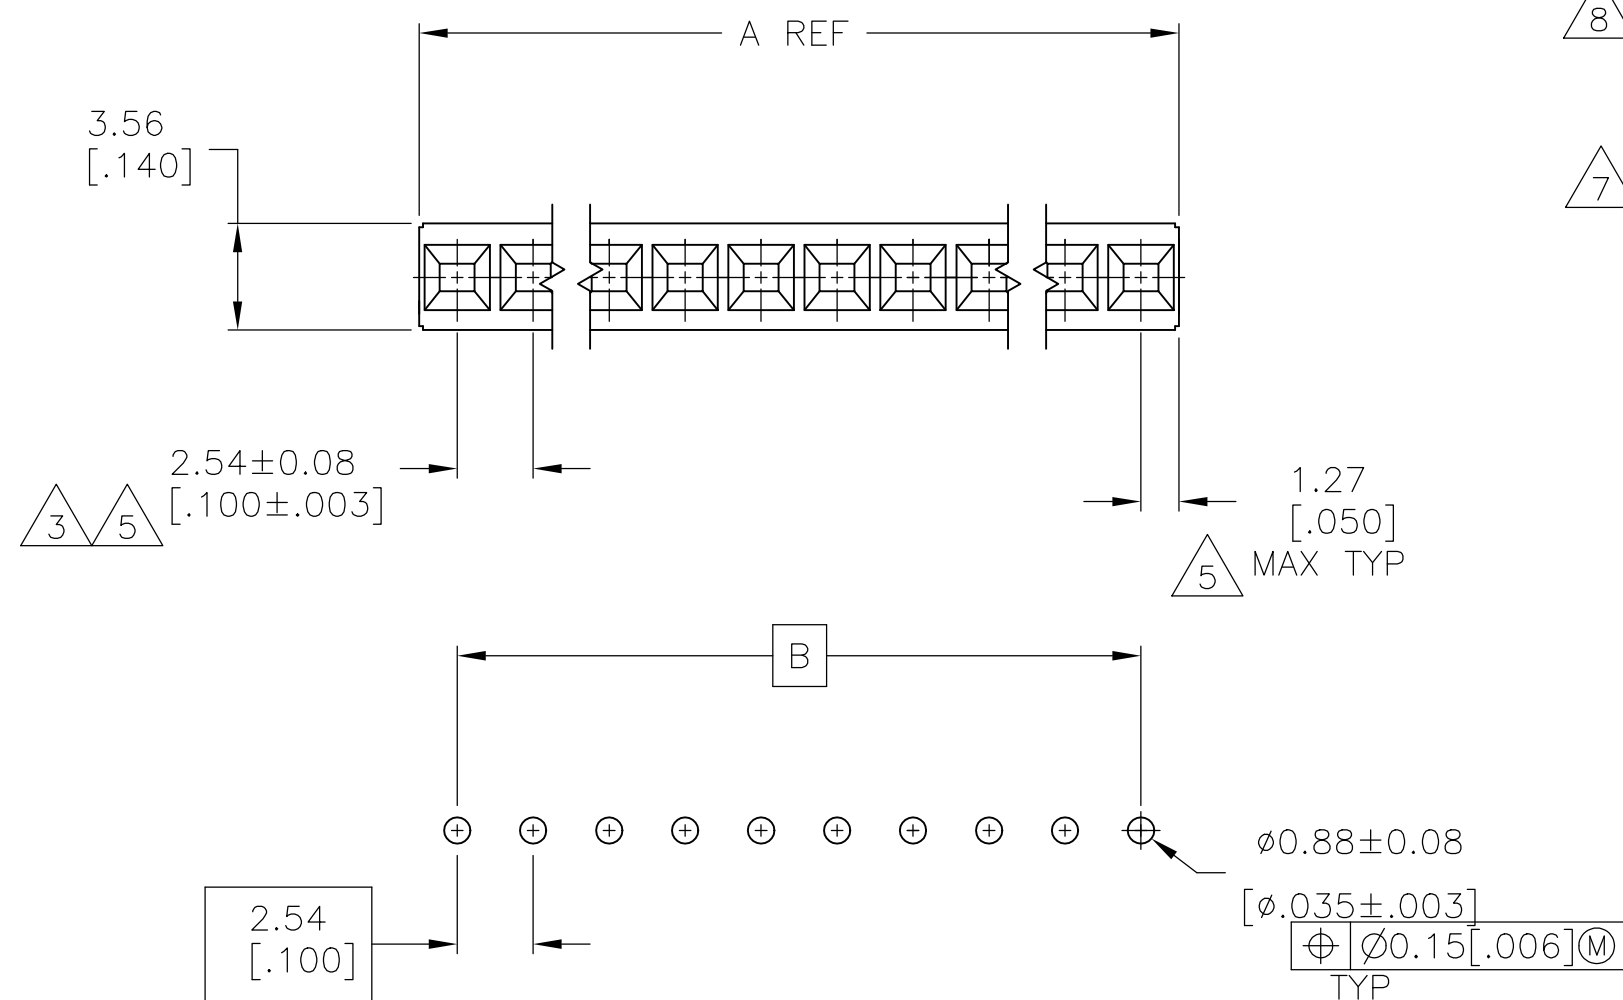

- | | | | | | | | |
|---|-----------------------|---------------|----------------|---------------|------------|------------|------------|
| <div> <div>9</div> <div>OBSELETE</div> </div> | | -2.54 [1.100] | 5.08 [2.200] | 2 | 6 | 3-146386-9 | |
| | | 99.06 [3.900] | 101.60 [4.000] | 40 | | 3-146386-8 | |
| | | 96.52 [3.800] | 99.06 [3.900] | 39 | | 3-146386-7 | |
| | | 93.98 [3.700] | 96.52 [3.800] | 38 | | 3-146386-6 | |
| | | 91.44 [3.600] | 93.98 [3.700] | 37 | | 3-146386-5 | |
| | | 86.36 [3.400] | 88.90 [3.500] | 35 | | 3-146386-4 | |
| | | 83.82 [3.300] | 86.36 [3.400] | 34 | | 3-146386-3 | |
| | | 78.74 [3.100] | 81.28 [3.200] | 32 | | 3-146386-2 | |
| | | 71.12 [2.800] | 73.66 [2.900] | 29 | | 3-146386-1 | |
| | | 68.58 [2.700] | 71.12 [2.800] | 28 | | 3-146386-0 | |
| | | 66.04 [2.600] | 68.58 [2.700] | 27 | | 2-146386-9 | |
| | SUPERSEDED 7-146386-8 | | 60.96 [2.400] | 63.50 [2.500] | 25 | | 2-146386-8 |
| | | 58.42 [2.300] | 60.96 [2.400] | 24 | | 2-146386-7 | |
| | | 55.88 [2.200] | 58.42 [2.300] | 23 | | 2-146386-6 | |
| | | 50.80 [2.000] | 53.34 [2.100] | 21 | | 2-146386-5 | |
| | | 45.72 [1.800] | 48.26 [1.900] | 19 | | 2-146386-4 | |
| | | 43.18 [1.700] | 45.72 [1.800] | 18 | | 2-146386-3 | |
| | | 40.64 [1.600] | 43.18 [1.700] | 17 | | 2-146386-2 | |
| | | 38.10 [1.500] | 40.64 [1.600] | 16 | | 2-146386-1 | |
| | | 35.56 [1.400] | 38.10 [1.500] | 15 | | 2-146386-0 | |
| | | 7.62 [1.300] | 10.16 [1.400] | 4 | | 1-146386-9 | |
| | | 73.66 [2.900] | 76.20 [3.000] | 30 | | 1-146386-8 | |
| | | 88.90 [3.500] | 91.44 [3.600] | 36 | | 1-146386-7 | |
| | | 81.28 [3.200] | 83.82 [3.300] | 33 | | 1-146386-6 | |
| | | 76.20 [3.000] | 78.74 [3.100] | 31 | | 1-146386-5 | |
| | 63.50 [2.500] | 66.04 [2.600] | 26 | | 1-146386-4 | | |
| | 53.34 [2.100] | 55.88 [2.200] | 22 | | 1-146386-3 | | |
| | 48.26 [1.900] | 50.80 [2.000] | 20 | | 1-146386-2 | | |
| | 33.02 [1.300] | 35.56 [1.400] | 14 | | 1-146386-1 | | |
| | 30.48 [1.200] | 33.02 [1.300] | 13 | | 1-146386-0 | | |
| | 27.94 [1.100] | 30.48 [1.200] | 12 | | 146386-9 | | |
| | 25.40 [1.000] | 27.94 [1.100] | 11 | | 146386-8 | | |
| | 22.86 [1.900] | 25.40 [1.000] | 10 | | 146386-7 | | |
| | 20.32 [1.800] | 22.86 [1.900] | 9 | | 146386-6 | | |
| | 17.78 [1.700] | 20.32 [1.800] | 8 | | 146386-5 | | |
| | 15.24 [1.600] | 17.78 [1.700] | 7 | | 146386-4 | | |
| SUPERSEDED 5-146386-3 | | 12.70 [1.500] | 15.24 [1.600] | 6 | | 146386-3 | |
| | | 10.16 [1.400] | 12.70 [1.500] | 5 | | 146386-2 | |
| 9 | SUPERSEDED 5-146386-1 | 5.08 [2.200] | 7.62 [1.300] | 3 | | 146386-1 | |

		OBSOLETE		-2.54 [.100]	5.08 [.200]	2		8-146386-9
				99.06 [3.900]	101.60 [4.000]	40		8-146386-8
				96.52 [3.800]	99.06 [3.900]	39		8-146386-7
				93.98 [3.700]	96.52 [3.800]	38		8-146386-6
				91.44 [3.600]	93.98 [3.700]	37		8-146386-5
				86.36 [3.400]	88.90 [3.500]	35		8-146386-4
				83.82 [3.300]	86.36 [3.400]	34		8-146386-3
				78.74 [3.100]	81.28 [3.200]	32		8-146386-2
				71.12 [2.800]	73.66 [2.900]	29		8-146386-1
				68.58 [2.700]	71.12 [2.800]	28		8-146386-0
				66.04 [2.600]	68.58 [2.700]	27		7-146386-9
				60.96 [2.400]	63.50 [2.500]	25		7-146386-8
				58.42 [2.300]	60.96 [2.400]	24		7-146386-7
				55.88 [2.200]	58.42 [2.300]	23		7-146386-6
				50.80 [2.000]	53.34 [2.100]	21		7-146386-5
				45.72 [1.800]	48.26 [1.900]	19		7-146386-4
				43.18 [1.700]	45.72 [1.800]	18		7-146386-3
				40.64 [1.600]	43.18 [1.700]	17		7-146386-2
				38.10 [1.500]	40.64 [1.600]	16		7-146386-1
				35.56 [1.400]	38.10 [1.500]	15		7-146386-0
				7.62 [.300]	10.16 [.400]	4		6-146386-9
				73.66 [2.900]	76.20 [3.000]	30		6-146386-8
				88.90 [3.500]	91.44 [3.600]	36		6-146386-7
				81.28 [3.200]	83.82 [3.300]	33		6-146386-6
				76.20 [3.000]	78.74 [3.100]	31		6-146386-5
				63.50 [2.500]	66.04 [2.600]	26		6-146386-4
				53.34 [2.100]	55.88 [2.200]	22		6-146386-3
				48.26 [1.900]	50.80 [2.000]	20		6-146386-2
				33.02 [1.300]	35.56 [1.400]	14		6-146386-1
				30.48 [1.200]	33.02 [1.300]	13		6-146386-0
				27.94 [1.100]	30.48 [1.200]	12		5-146386-9
				25.40 [1.000]	27.94 [1.100]	11		5-146386-8
				22.86 [.900]	25.40 [1.000]	10		5-146386-7
				20.32 [.800]	22.86 [.900]	9		5-146386-6
				17.78 [.700]	20.32 [.800]	8		5-146386-5
				15.24 [.600]	17.78 [.700]	7		5-146386-4
				12.70 [.500]	15.24 [.600]	6		5-146386-3
				10.16 [.400]	12.70 [.500]	5		5-146386-2
				5.08 [.200]	7.62 [.300]	3		5-146386-1
		FINISH	B	A	NO OF POSN	PART NUMBER		

FINISH		B	A		NO OF POSN		PART NUMBER	
THIS DRAWING IS A CONTROLLED DOCUMENT.			DWN M.BINNER CHK J.DOLSON	OSNOV02 OSNOV02	 TE Connectivity Ltd.			
DIMENSIONS: mm [INCHES]		TO DIMENSIONS UNLESS OTHERWISE SPECIFIED:			NAME	REC.ASSY,MOD IV, SR. .100CL VRT BOARD MOUNT,CLOSED,TE SHORT PNT. OF CONTACT		
	0 PLC ± 1 PLC ± 2 PLC ± 0.25 [0.01] 3 PLC ± 0.12 [0.005] 4 PLC ± ANGLES ±	PRODUCT SPEC: 108-25022						
MATERIAL	FINISH	APPLICATION SPEC: 114-25018						
	SEE TABLE	WEIGHT						
CUSTOMER DRAWING					SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
					A1	00779	G146386	-
					SCALE	4:1	SHEET 1 of 1	REV K0

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[5-146386-1](#)