
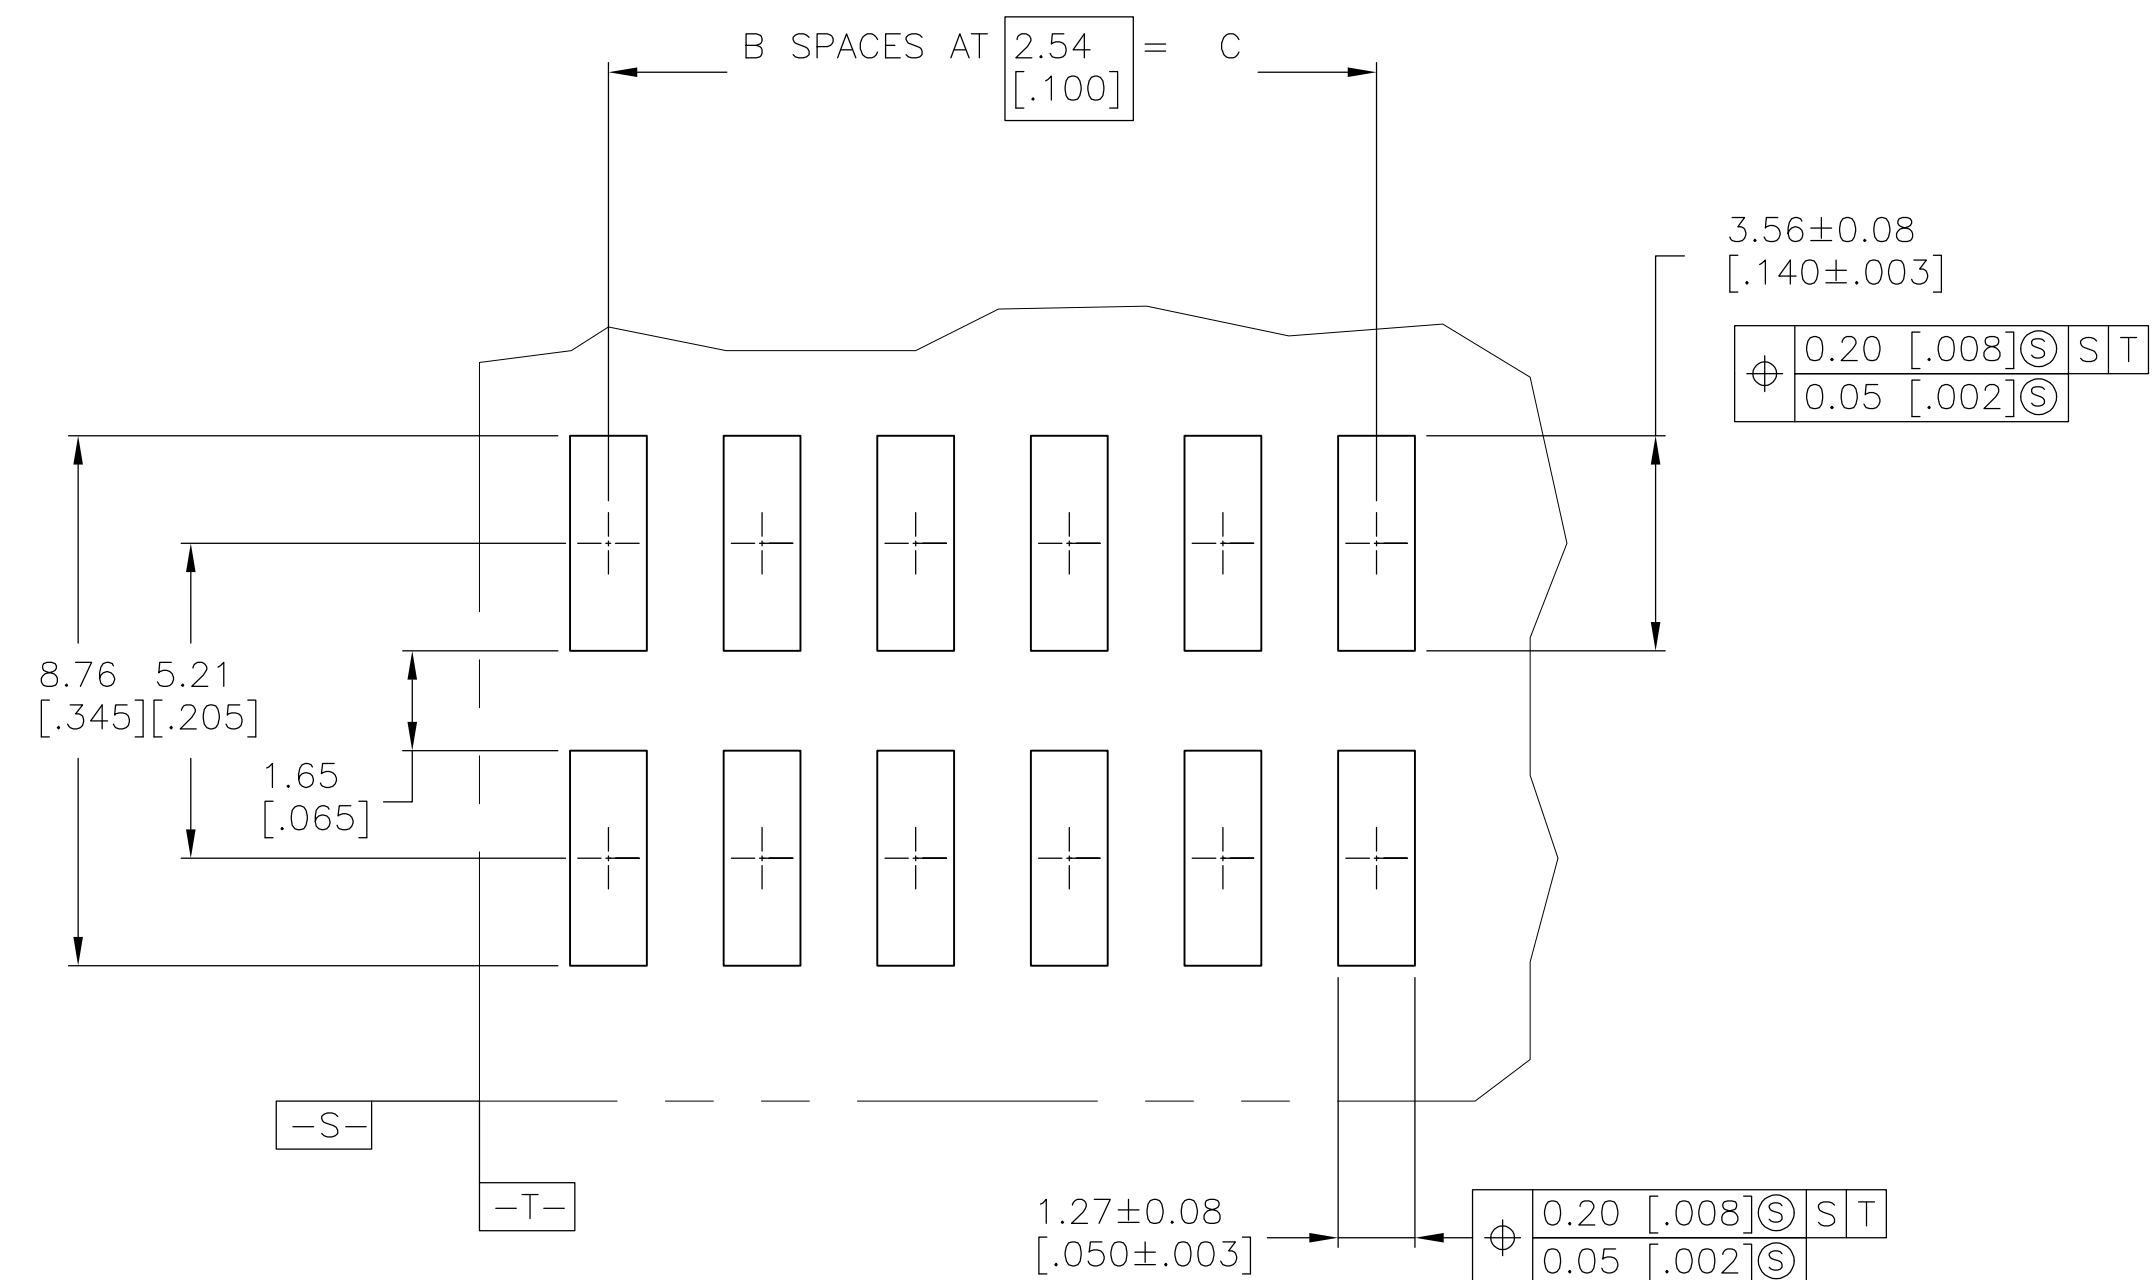
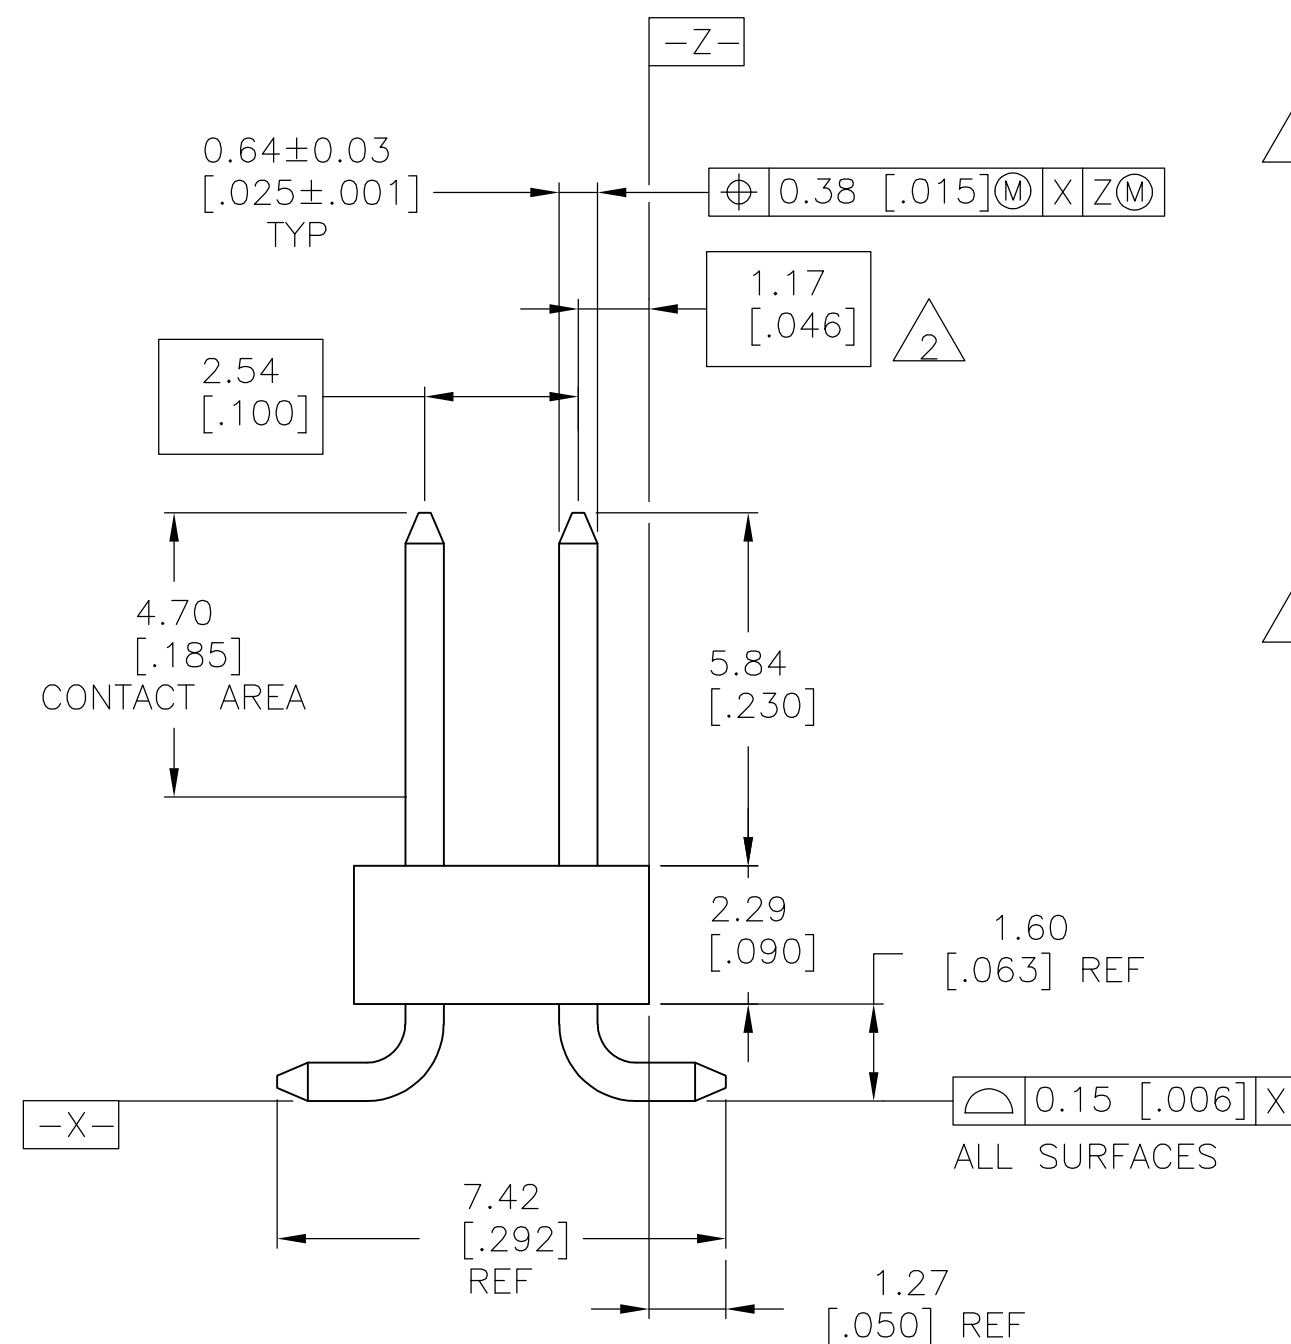
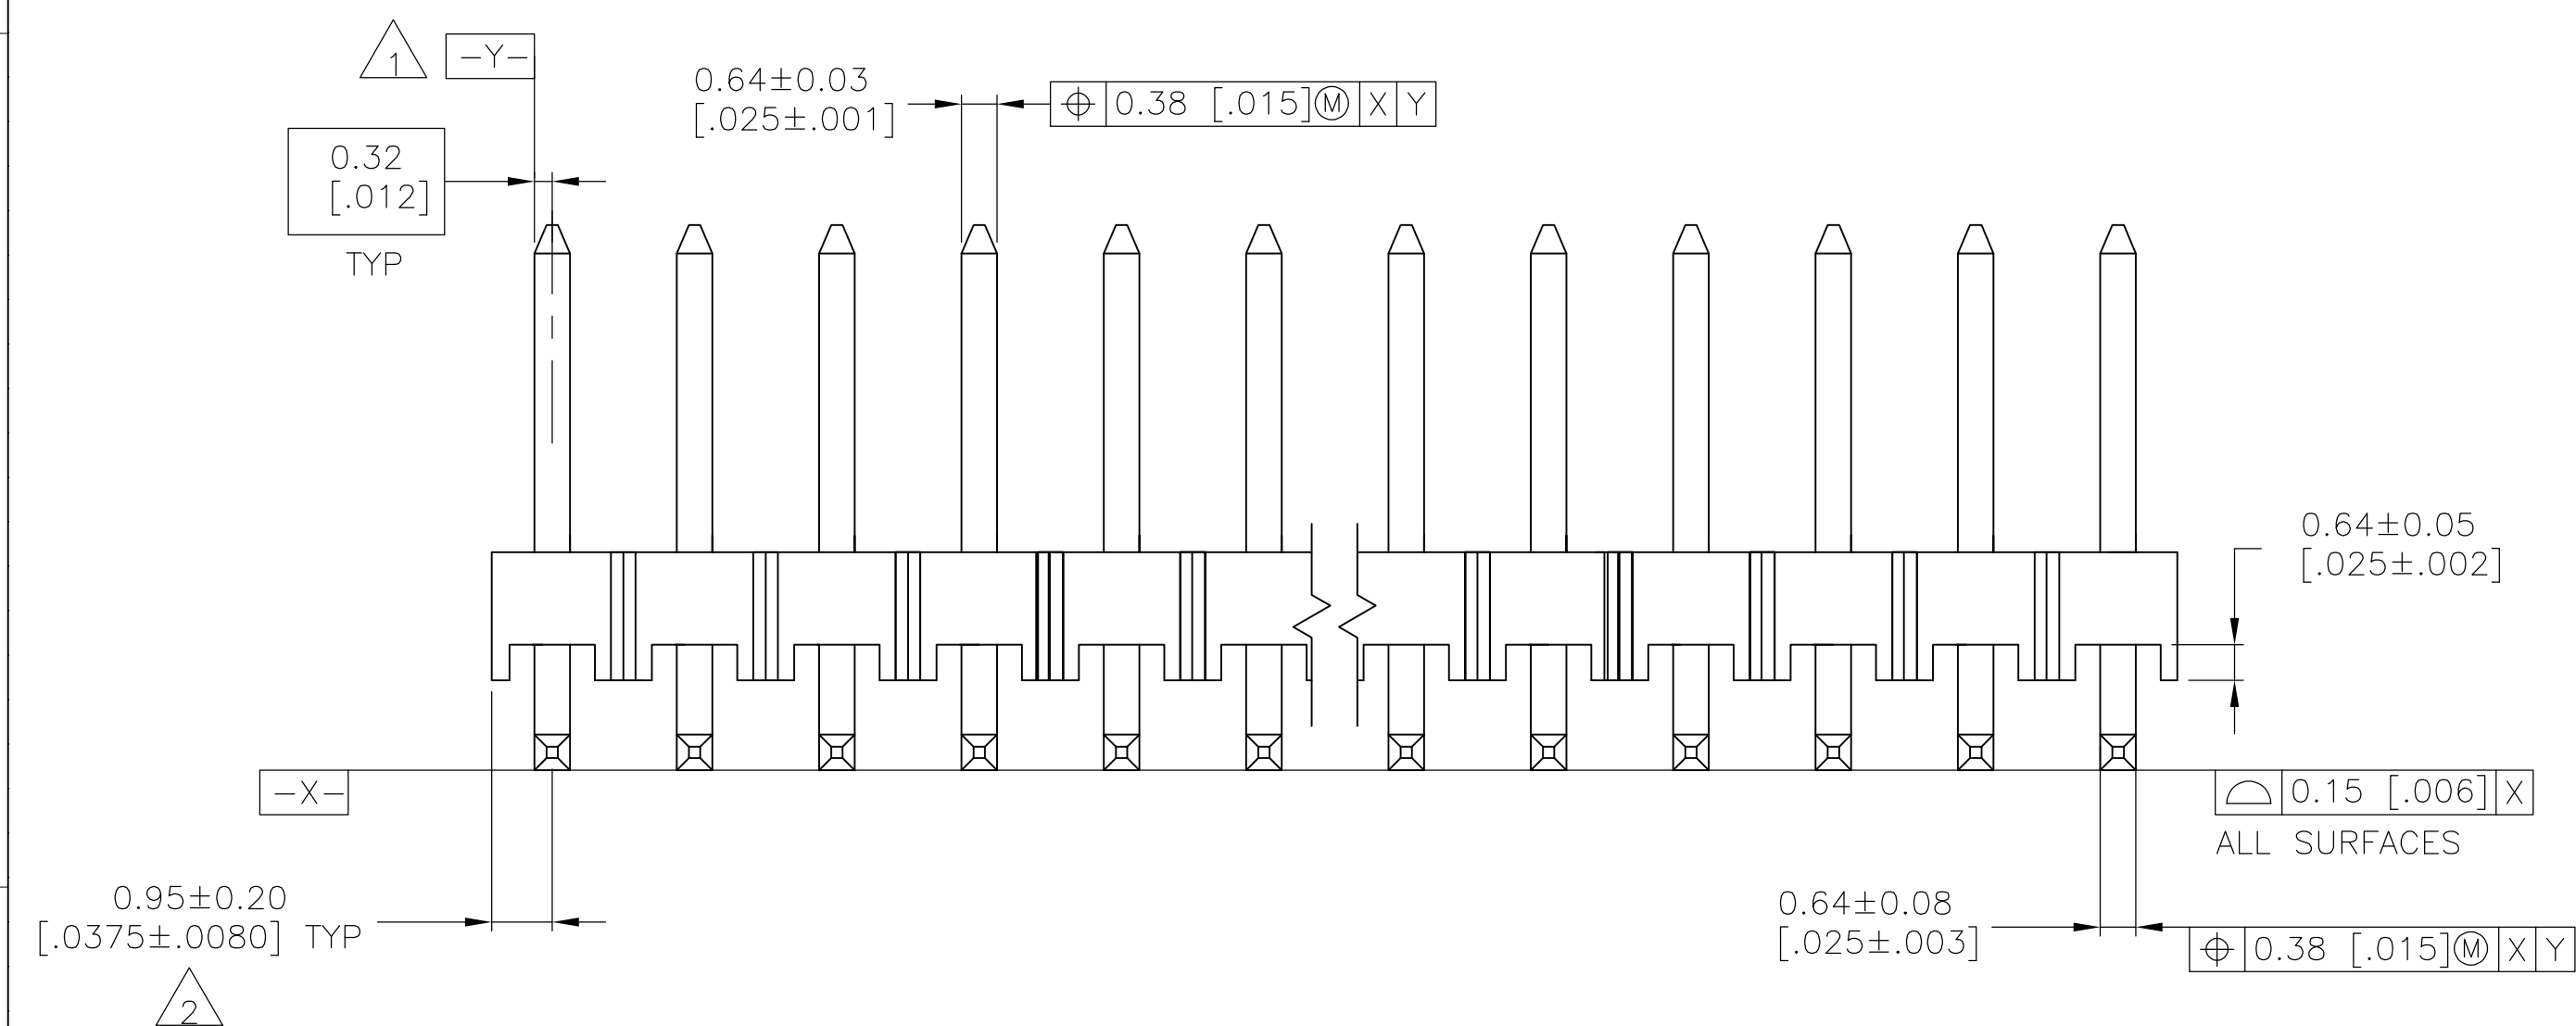


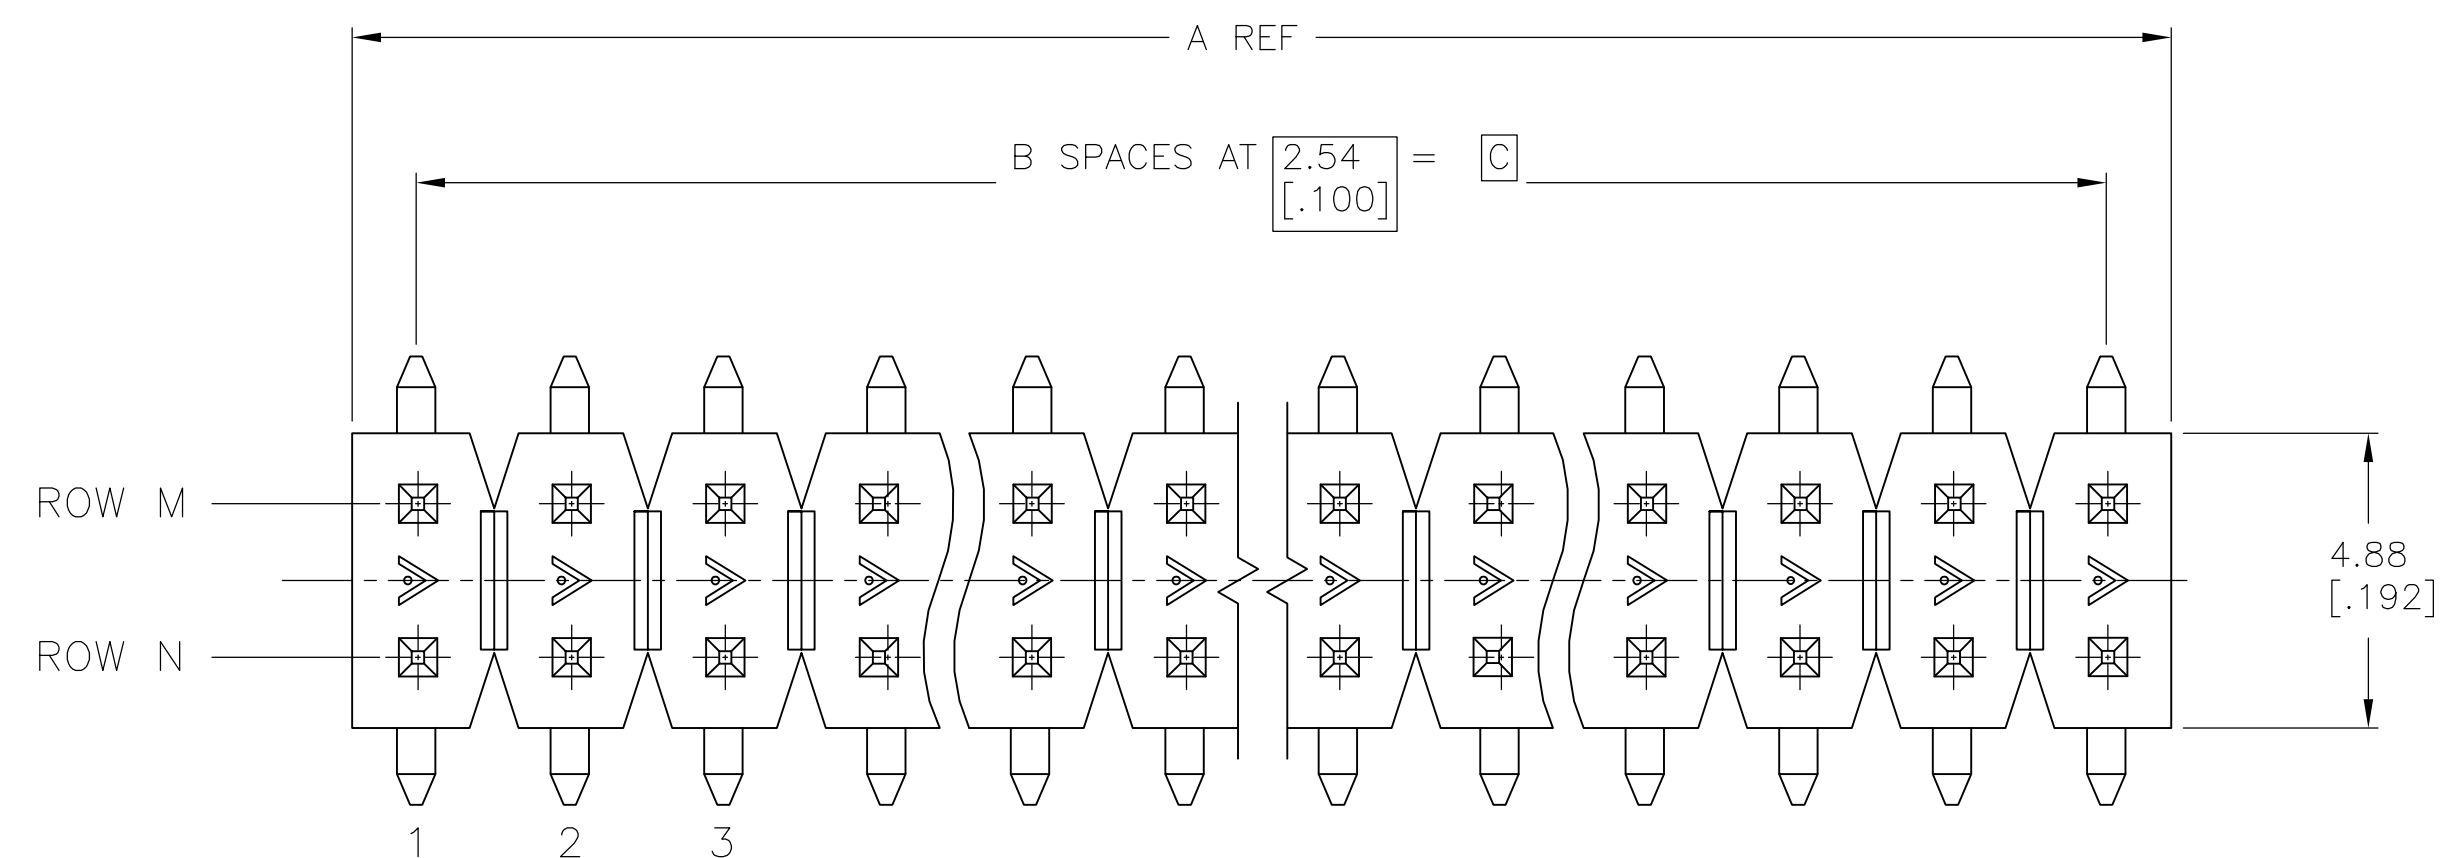

- | | | |
|---|---|---|
| 1 |  | SHALL BE THE INTERSECTION OF THE POST AND THE HOUSING. |
| 2 | | THE NOTED DIMENSION APPLIES FROM THE BASIC DIMENSION (NOT THE POST CENTERLINE) TO THE SURFACE INDICATED. |
| 3 | | 0.000762[.000030] GOLD ON CONTACT AREA, 0.00254-0.00508[.000100-.000200] MATTE TIN-LEAD ON SOLDER TAIL, ALL OVER 0.00127[.000050] NICKEL. |
| 4 | | HOUSING: LCP, COLOR-BLACK.
POSTS: COPPER ALLOY. |
| 5 | | PRELIMINARY PART - NOT RELEASED FOR PRODUCTION. |
| 6 | | 0.000762[.000030] GOLD ON CONTACT AREA, 0.00254-0.00508[.000100-.000200] MATTE TIN ON SOLDER TAIL, ALL OVER 0.00127[.000050] NICKEL. |
| 7 | | OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI |

5	7	OBSOLETE	5	6	13	NONE	30.48 [.200]	12	32.61 [.284]	26	7-146806-4	
			5	6	NONE	3	7.62 [.300]	3	9.75 [.384]	8	7-146806-3	
			5	6	NONE	2	7.62 [.300]	3	9.75 [.384]	8	7-146806-2	
			5	3	NONE	8	22.86 [.900]	9	24.99 [.984]	20	7-146806-0	
			6	8	NONE	17.78 [.700]	7	19.91 [.784]	16	6-146806-9		
			6	7	4	15.24 [.600]	6	17.37 [.684]	14	6-146806-8		
			6	1	4	15.24 [.600]	6	17.37 [.684]	14	6-146806-7		
			6	NONE	4	12.70 [.500]	5	14.83 [.584]	12	6-146806-6		
7	OBSOLETE	6	NONE	1	17.78 [.700]	7	19.91 [.784]	16	6-146806-5			
		6	NONE	1	10.16 [.400]	4	12.29 [.484]	10	6-146806-4			
5	7	OBSOLETE	6	NONE	3	10.16 [.400]	4	12.29 [.484]	10	6-146806-3		
			6	1	NONE	10.16 [.400]	4	12.29 [.484]	10	6-146806-2		
			6	13	1	30.48 [.200]	12	32.61 [.284]	26	6-146806-1		
			6	1	15	35.56 [.400]	14	37.69 [.484]	30	5-146806-6		
006	X	CES	7	OBSOLETE	6	NONE	4	10.16 [.400]	4	12.29 [.484]	10	5-146806-5
					6	NONE	10	40.64 [.600]	16	42.77 [.684]	34	5-146806-4
					6	11	NONE	35.56 [.400]	14	37.69 [.484]	30	5-146806-3
					6	10	NONE	35.56 [.400]	14	37.69 [.484]	30	5-146806-2
			6	NONE	3	30.48 [.200]	12	32.61 [.284]	26	5-146806-1		
			7	OBSOLETE	3	NONE	5	12.70 [.500]	5	14.83 [.584]	12	2-146806-1
					3	7	4	15.24 [.600]	6	17.37 [.684]	14	1-146806-7
					3	NONE	4	12.70 [.500]	5	14.83 [.584]	12	1-146806-6
3	NONE	1			17.78 [.700]	7	19.91 [.784]	16	1-146806-5			
7	OBSOLETE	3	NONE	1	10.16 [.400]	4	12.29 [.484]	10	1-146806-4			
		3	NONE	3	10.16 [.400]	4	12.29 [.484]	10	1-146806-3			
		3	1	NONE	10.16 [.400]	4	12.29 [.484]	10	1-146806-2			
		3	13	1	30.48 [.200]	12	32.61 [.284]	26	1-146806-1			
		5	3	7,8,9	6,8,9,10	22.86 [.900]	9	24.99 [.984]	20	1-146806-0		
		5	3	3	NONE	15.24 [.600]	6	17.37 [.684]	14	146806-9		
		5	3	3	4	10.16 [.400]	4	12.29 [.484]	10	146806-8		
		5	3	NONE	3	10.16 [.400]	4	12.29 [.484]	10	146806-7		
7	OBSOLETE	3	1	15	35.56 [.400]	14	37.69 [.484]	30	146806-6			
		3	NONE	4	10.16 [.400]	4	12.29 [.484]	10	146806-5			
		3	NONE	10	40.64 [.600]	16	42.77 [.684]	34	146806-4			
		3	11	NONE	35.56 [.400]	14	37.69 [.484]	30	146806-3			
7	OBSOLETE	3	10	NONE	35.56 [.400]	14	37.69 [.484]	30	146806-2			
		3	NONE	3	30.48 [.200]	12	32.61 [.284]	26	146806-1			
		PLATING	ROW M	ROW N	C	B	A	NO OF POSN	PART NUMBER			
			POSTS	OMITTED								

RECOMMENDED PCB LAYOUT
FOR USE WITH .008 THICK STENCIL

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[7-146806-3](#)