

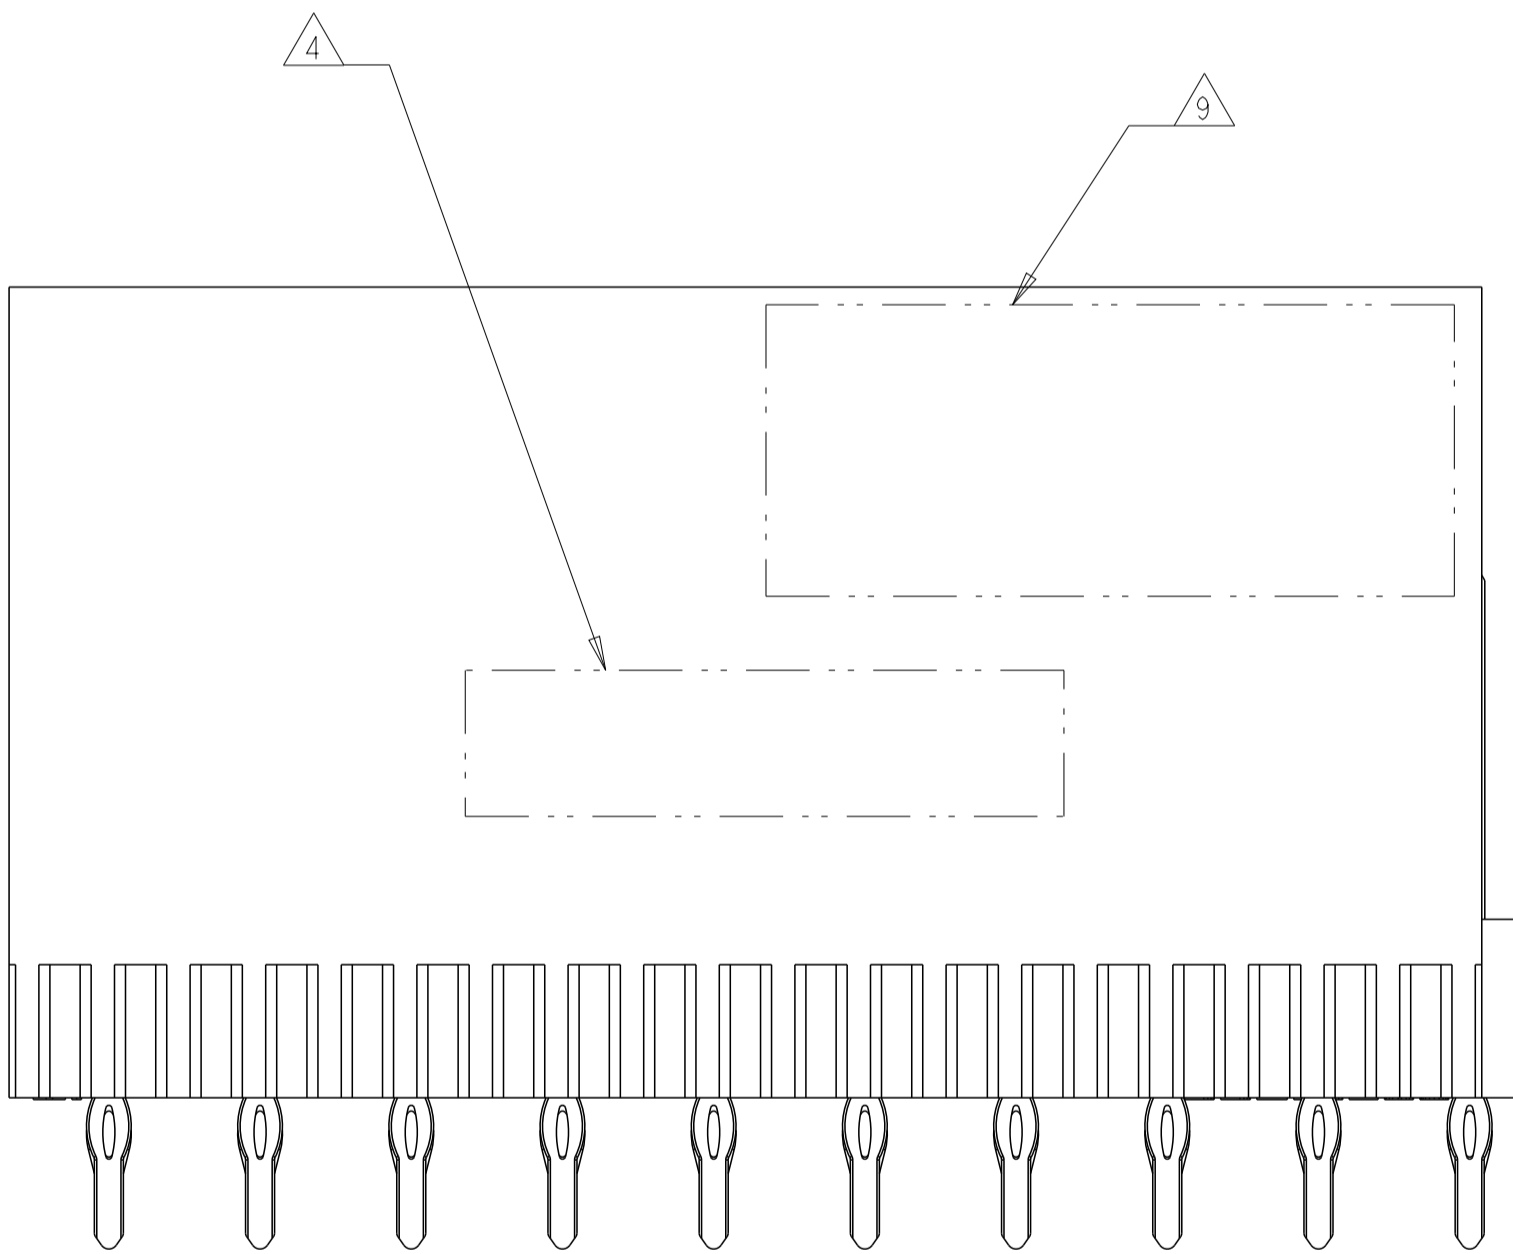
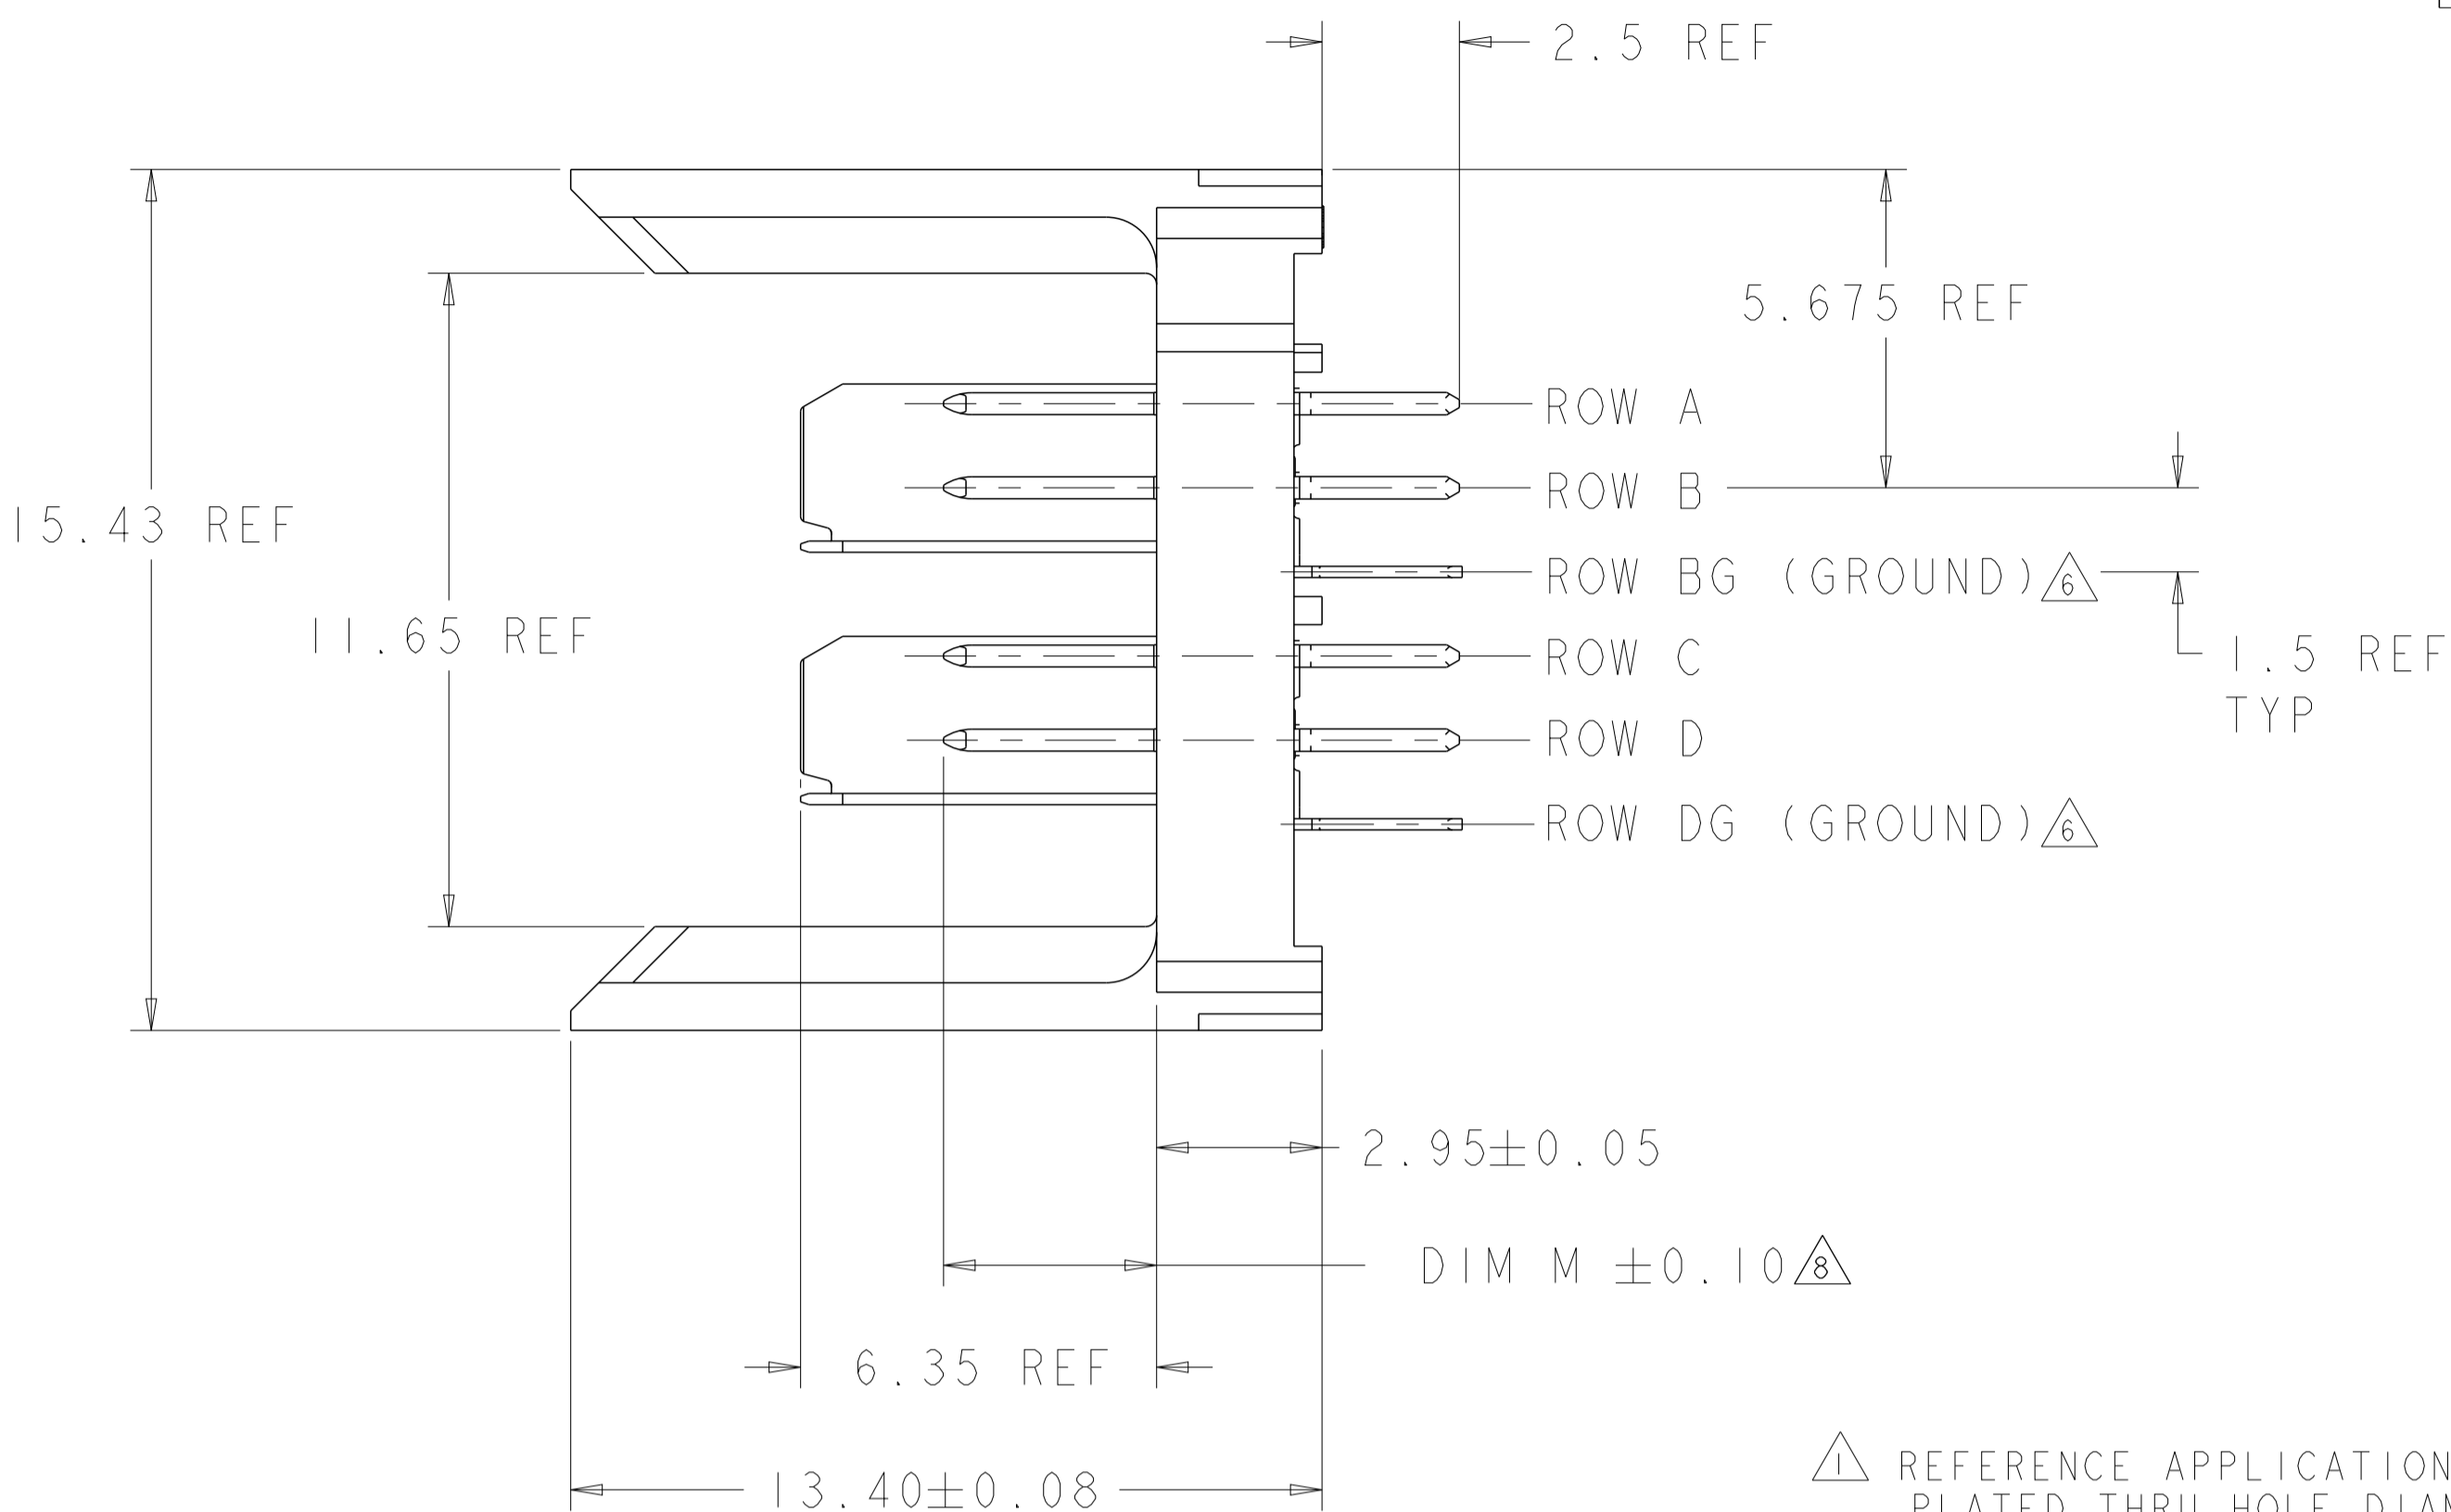


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
AD	00	C		REVISED PER ECO-12-000118	17JAN12	KH	DY
		D		REVISED PER ECO-18-018129	25SEP2019	AP	DS

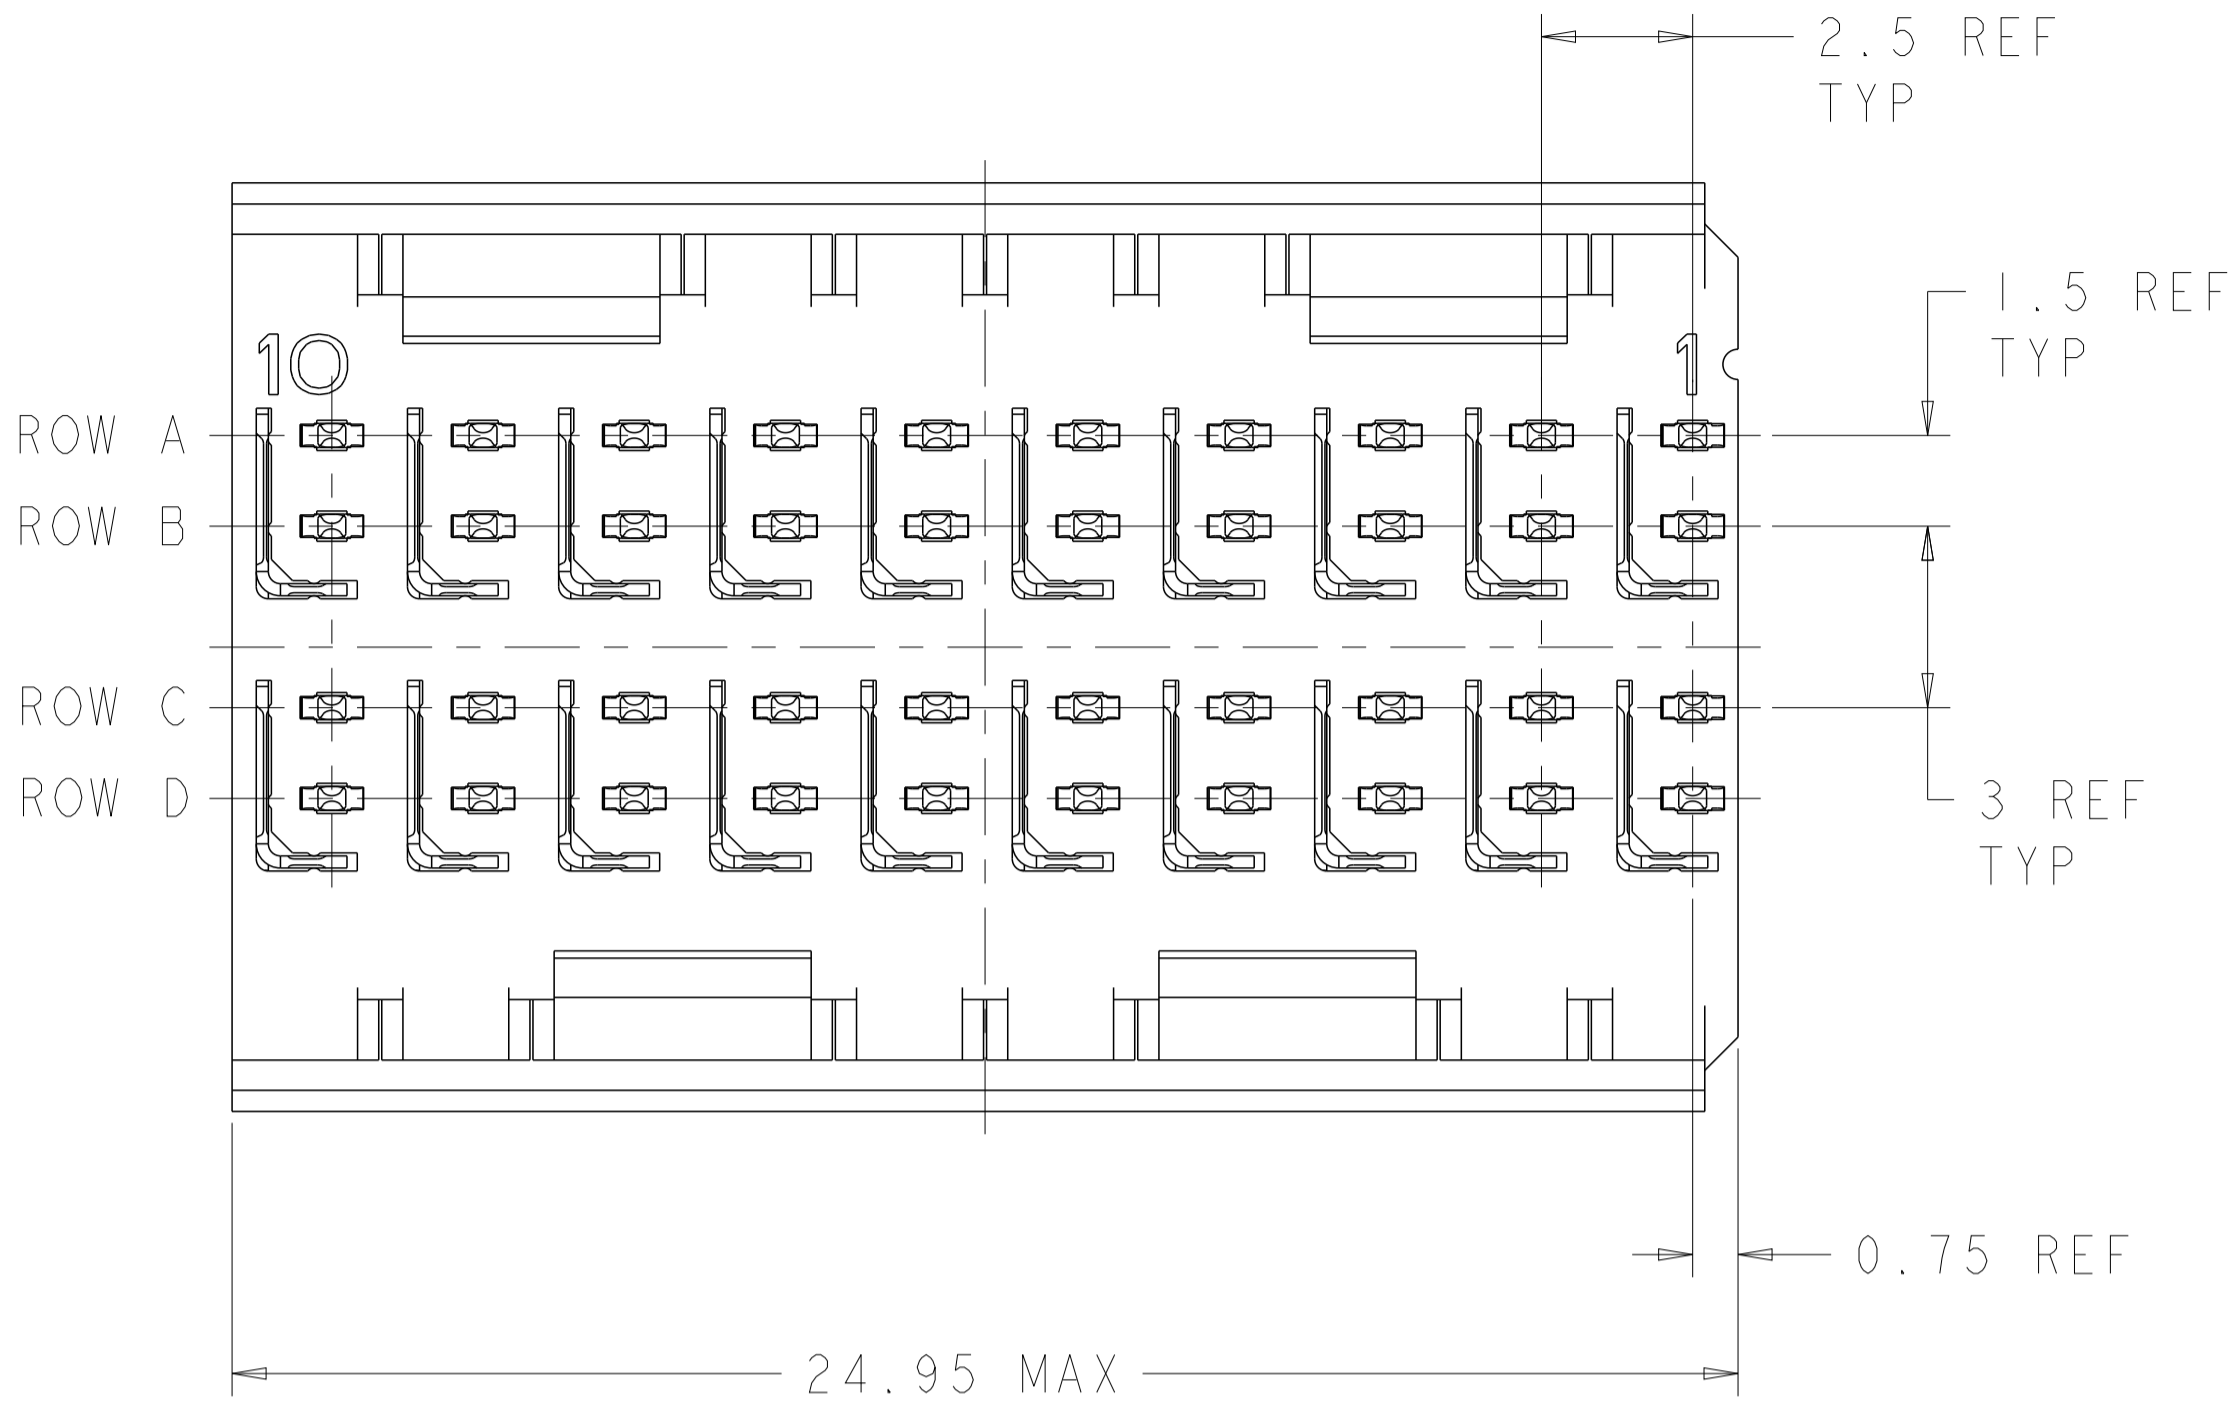

⊕ Ø0.05Ⓢ X Y
ALL PLATED THRU HOLES

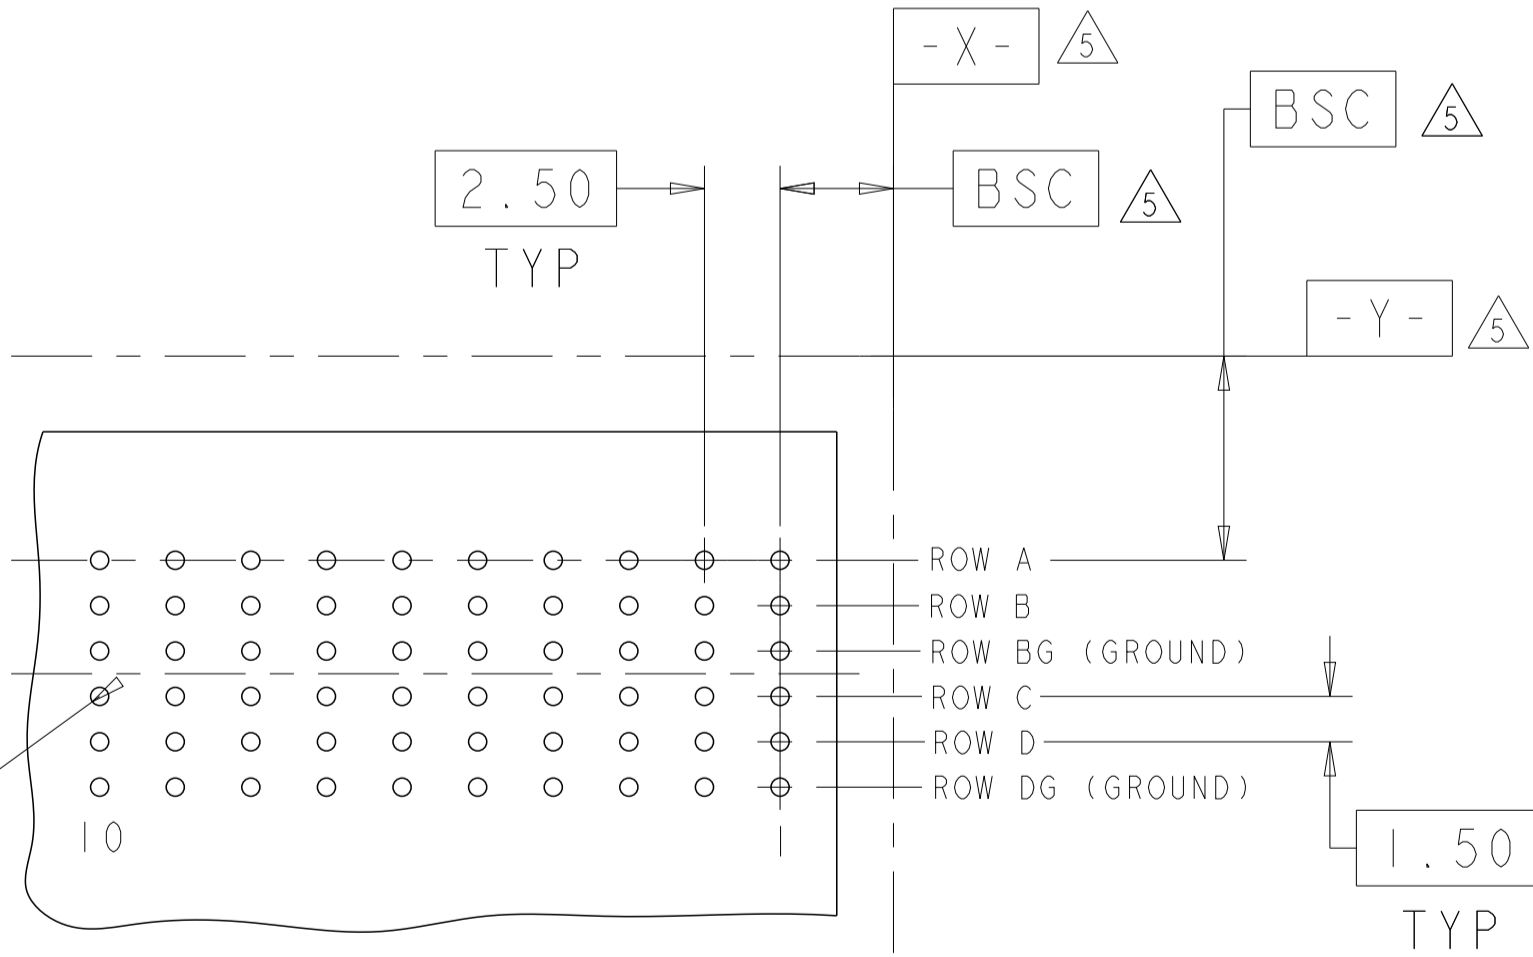

- △1 REFERENCE APPLICATION SPEC 114-13059 FOR RECOMMENDED PLATED THRU HOLE DIAMETER AND PLATING THICKNESSES.
- △2 MATERIAL:
CONTACT AND SHIELD - PHOSPHOR BRONZE
HOUSING - GLASS FILLED POLYESTER. UL 94V-0.
- △3 FINISH: SIGNAL AND GROUND CONTACTS:
MATING AREA: MEETS THE PERFORMANCE REQUIREMENTS OF PRODUCT SPECIFICATION 108-2055; BASED ON TELCORDIA GR-1217-CORE, APPLICATIONS IN UNCONTROLLED ENVIRONMENTS
COMPLIANT PIN AREA: 0.5 μm MIN BRIGHT TIN-LEAD OVER BASE PLATING
- △4 CONNECTOR MARKED WITH PART NUMBER AND DATE CODE.
- △5 DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
- △6 THE TWO GROUNDS IN EACH COLUMN ARE COMMONED.
7. CONTACT AREA LUBRICATED WITH BELLCORE APPROVED LUBRICANT. TECHNICAL REFERENCE: GR-1217-CORE, ISSUE 1, NOVEMBER 1995.
- △8 REFER TO "CONTACT LAYOUT" CHART FOR SEQUENCING.
- △9 TE OR TE CONNECTIVITY LOGO IS LOCATED.

CONTACT LAYOUT										
A = 3.80mm (DIM M) B = 5.30mm (DIM M) G = GROUND										
ROWS	COLUMNS									
		10	9	8	7	6	5	4	3	2 1
	A	A	B	B	B	B	B	B	B	A
	B	A	B	B	B	B	B	B	B	A
	BG	G	G	G	G	G	G	G	G	G
	C	A	B	B	B	B	B	B	B	A
	D	A	B	B	B	B	B	B	B	A
	DG	G	G	G	G	G	G	G	G	G

1469334-1
PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. J. MAGARO CHK R. PATTERSON APVD R. PATTERSON	12JUN2003 12JUN2003 17AUG2007	NAME		TE Connectivity	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC.		APPLICATION SPEC.	
MATERIAL		SIZE		CAGE CODE		DRAWING NO.	
FINISH		WEIGHT		RESTRICTED TO		SCALE	
CUSTOMER DRAWING		A100779		C=1469334		SHEET 1 OF 1	
						REV D	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1469334-1](#)