

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	R2	REVISED PER ECO-17-006294	09OCT2017	RS	DR
	R3	REVISED PER ECO-19-010628	12FEB2020	RK	DR


- 1 FOR  $\varnothing 7.925$  [ $\varnothing .312$ ] MAX WIRE INSULATION.
- 2 NOTE DELETED.
- 3

MATERIAL: BODY; COPPER PER ASTM B152  
INSULATION; PVC
- 4

FINISH: BODY; TIN PLATE 0.00254[.000100]  
MIN EXT. THK. PER ASTM B-545  
INSULATION; COLOR-PURPLE

 WIRE RANGE	 Listed	 LR7189 Certified
22-10 AWG SOLID OR STRANDED	22-10 AWG SOLID OR STRANDED	22-10 AWG SOLID OR STRANDED

STAMPING DETAIL

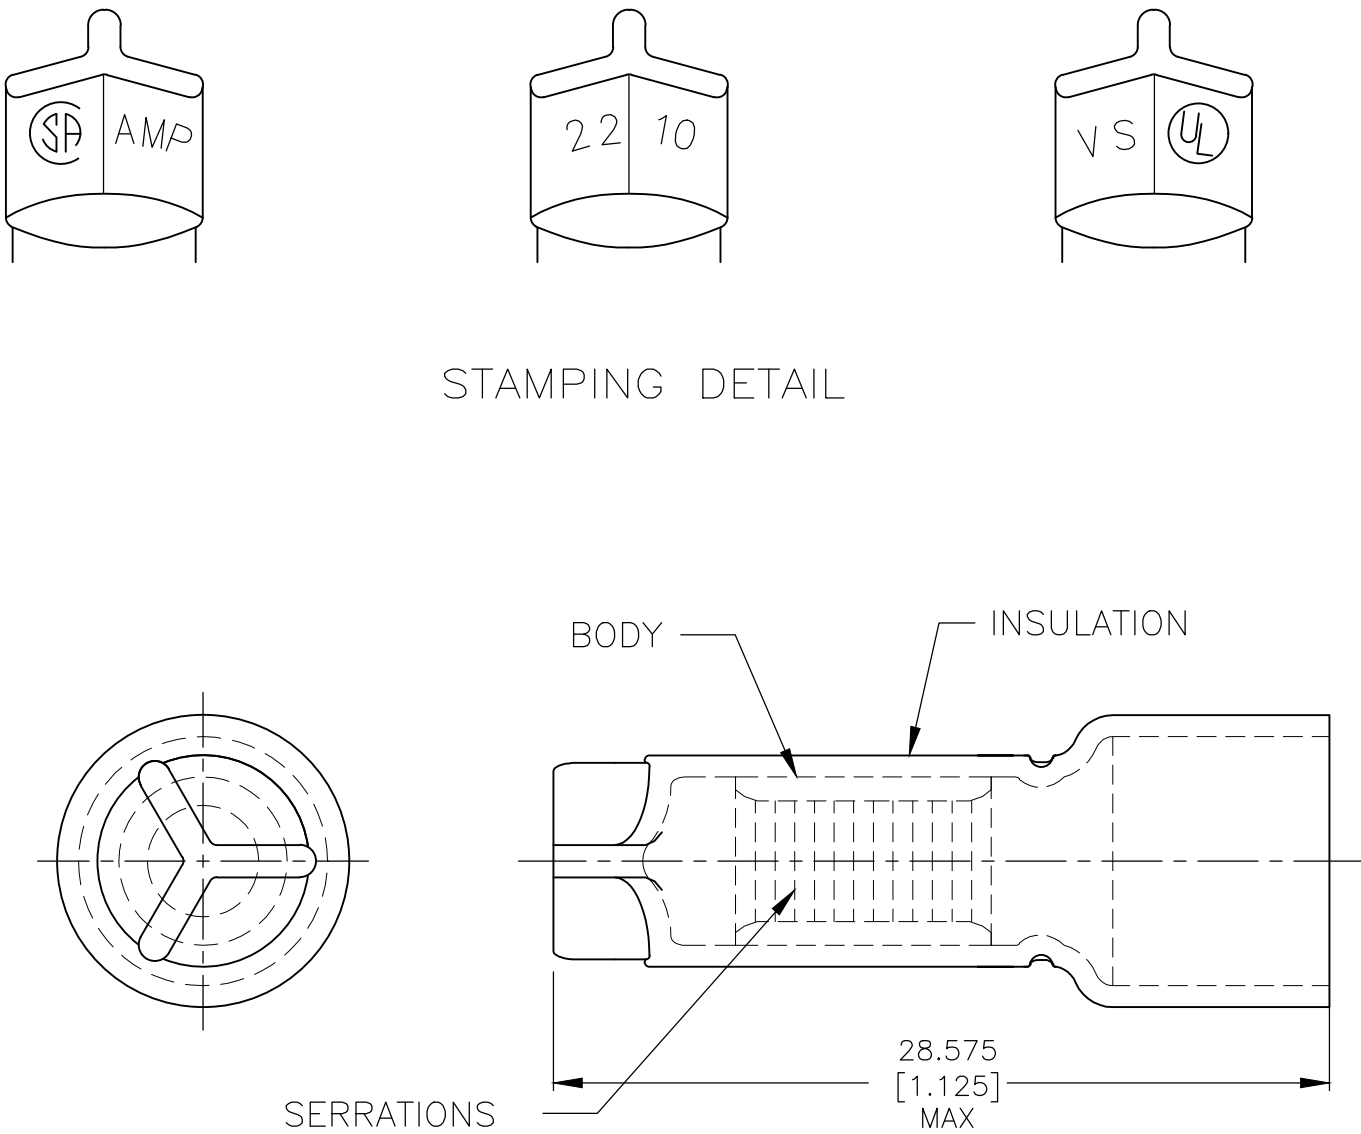

1,500	TAPE MOUNTED	1-36965-1
500	LOOSE PIECE	36965
QTY	DESCRIPTION	PART NO

AMP INCORPORATED  
CUSTOMER SERVICE SYSTEMS

FOR ADDITIONAL  
PRODUCT INFORMATION OR  
COPIES OF DRAWINGS  
AND TECHNICAL DOCUMENTS

PRODUCT INFORMATION CENTER  
1-800-522-6752

FOR APPLICATION  
TOOLING INFORMATION

TOOLING ASSISTANCE CENTER  
1-800-722-1111

FOR ORDER ENTRY

1-800-526-5142


MAX RECOMMENDED OPERATING  
TEMPERATURE:  
90°C[194°F] MAX

VOLTAGE RATING:  
300V MAX

CIRCULAR MIL AREA:  
0.3-6.0mm<sup>2</sup>[3248-13100]  
SOLID OR STRANDED

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:  
mm [INCHES]



TOLERANCES UNLESS  
OTHERWISE SPECIFIED:

0 PLC ± -  
1 PLC ± -  
2 PLC ± -  
3 PLC ± 0.127[.005]  
4 PLC ± -  
ANGLES ± -  
FINISH

MATERIAL

3

DWN  
G KRUPER  
1/93


CHK  
R HERSEY  
1/93

APVD  
M ELLIS  
1/93

PRODUCT SPEC  
UL 486 C

APPLICATION SPEC  
114-2149

WEIGHT  
-

 TE Connectivity

NAME  
SPLICE, WIRE, CLOSED END  
22-10 AWG  
-

SIZE  
A3

CAGE CODE  
00779

DRAWING NO  
C-36965

RESTRICTED TO  
-

CUSTOMER DRAWING

SCALE  
4:1

SHEET  
1 OF 1

REV  
R3

1470-19 (1/15)

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-36965-1](#)