


THIS DRAWING IS UNPUBLISHED.


RELEASED FOR PUBLICATION

© COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
	G	0G3B-0317-03	24APR03	TK	GS



ACCOMODATES
1.57 DIA PIN
[.062]

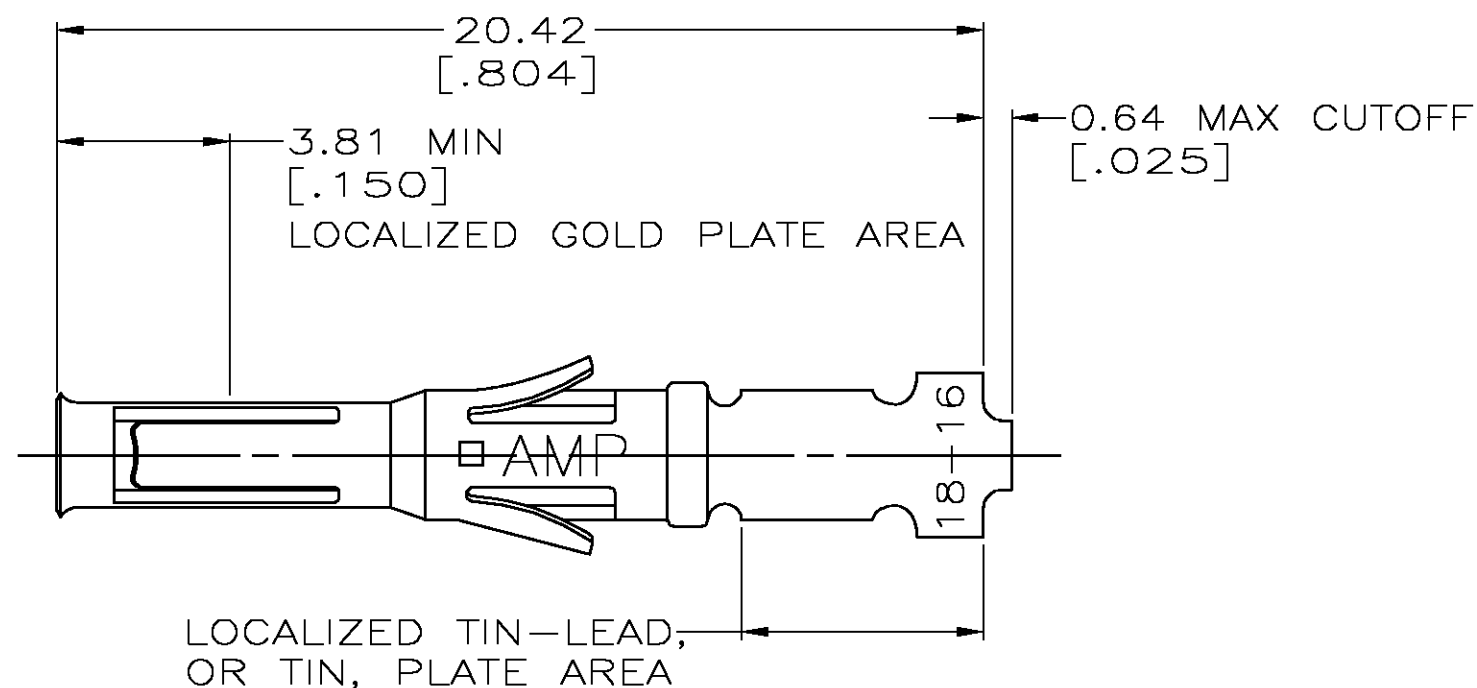

1. WIRE RANGE 18-16 AWG.
2. INSULATION RANGE 2.03-2.54 [.080-.100] DIA.
3. 0.76 μm [.000030] MIN GOLD IN LOCALIZED GOLD PLATE AREA,
1.27 μm [.000050] MIN TIN-LEAD IN LOCALIZED TIN-LEAD PLATE AREA,
BOTH OVER 1.27 μm [.000050] MIN NICKEL.
4. TIN PLATED.
5. GOLD PLATING PER MIL-G-45204, TIN PER MIL-T-10727
AND NICKEL PER QQ-N-290.
6. 0.76 μm [.000030] MIN GOLD IN LOCALIZED GOLD PLATE AREA,
1.27 μm [.000050] MIN TIN IN LOCALIZED TIN PLATE AREA,
BOTH OVER 1.27 μm [.000050] MIN NICKEL.

66580-7	6	66590-4
66580-4	3	66590-2
66580-2	4	66590-1
STRIP REF	FINISH	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D.HARDY	06/15/94	tyco Electronics		Tyco Electronics Corporation		
		CHK R.STONE	06/22/94			Harrisburg, Pa		
DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD G.STEINHAUER	06/27/94	NAME CONTACT, SOCKET, LOOSE PIECE, TYPE VI, MULTIMATE			
	0 PLC ± — 1 PLC ± — 2 PLC ± 0.13 [.005] 3 PLC ± — 4 PLC ± — ANGLES ± —		PRODUCT SPEC —					
			APPLICATION SPEC —					
	MATERIAL BRS PER MIL—C—50	FINISH  SEE TABLE		WEIGHT —		SIZE A3	CAGE CODE 00779	DRAWING NO C-66590
CUSTOMER DRAWING					SCALE 6:1	SHEET 1	OF 1	REV G

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[66590-4](#)