


CUSTOMER DRAWING

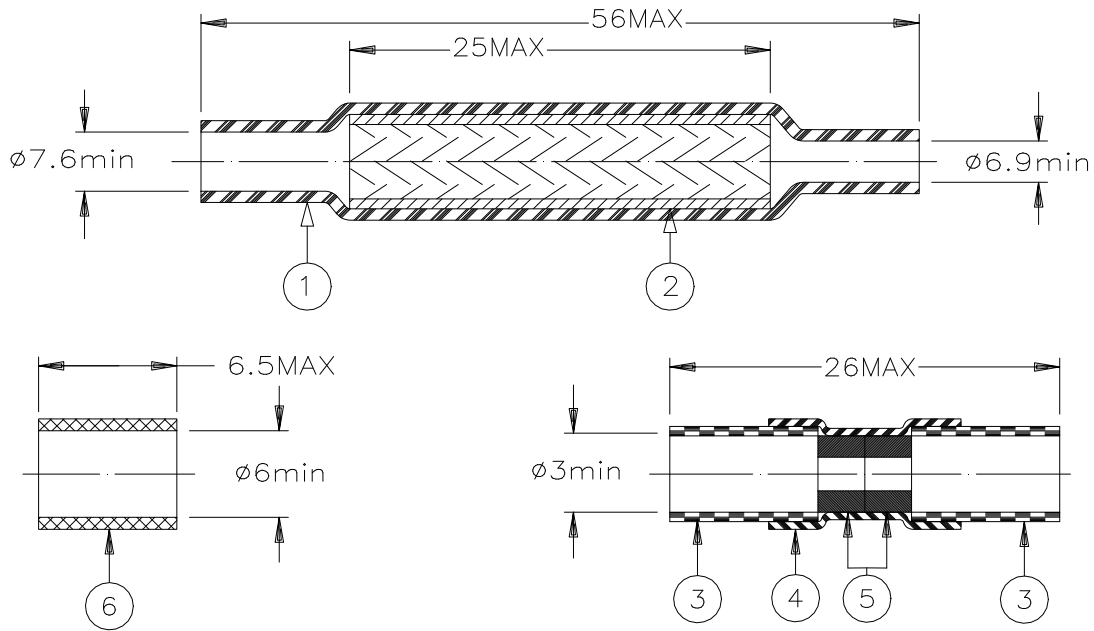


MATERIAL


1. INSULATION SLEEVE: Heat-shrinkable, radiation cross-linked modified polyolefin. Transparent clear.
2. SOLDERSHIELD DEVICE: Tin plated copper braid with flux.
3. DIELECTRIC BARRIER: Cross-linked polyvinylidene fluoride. Color: yellow.
4. INSULATION SLEEVE: Heat-shrinkable, radiation cross-linked modified polyvinylidene fluoride. Transparent blue.
5. SOLDER PREFORM WITH FLUX:
 SOLDER: TYPE Sn63 per ANSI J-STD-006.
 FLUX: TYPE ROL0 per ANSI J-STD-004.
6. INSULATION TUBING: Precoated, radiation cross-linked modified polyolefin with adhesive. Color: black.

APPLICATION

1. This controlled soldering device is designed to splice the center conductor and the braid, both made of bare tin or silver-plated copper, of coaxial cables having an insulation temperature rated for at least $+85^{\circ}\text{C}$. The product is suitable for single or double braided cables.
2. Temperature range: -55°C to $+125^{\circ}\text{C}$.
3. For installation procedure: See RPIP-699-00.

Cable Dimensions:

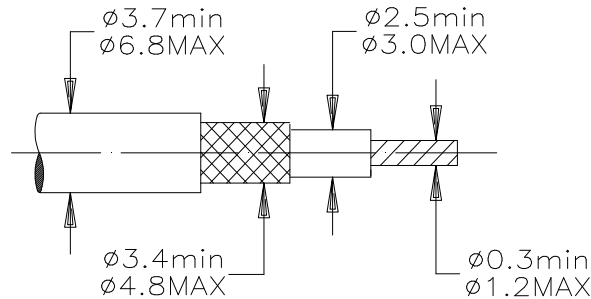

 TE Connectivity		Raychem Devices		TITLE : COAXIAL CABLE SPLICE KIT				
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. INCHES DIMENSIONS ARE BETWEEN BRACKETS.				DOCUMENT NO.: B-202-81				
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A ROUGHNESS IN MICRON	TE Connectivity reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.		DOCUMENT REVISION: C		REVISION ISSUE DATE: 12-MAR-2020		
DRAWN BY: M. MAPALO		DATE: 17-SEP-1998	CAGE CODE: 06090	ECO NUMBER: ECO-20-003669		SCALE: None	SIZE: A	SHEET: 1 of 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[B-202-81](#)