


CUSTOMER DRAWING

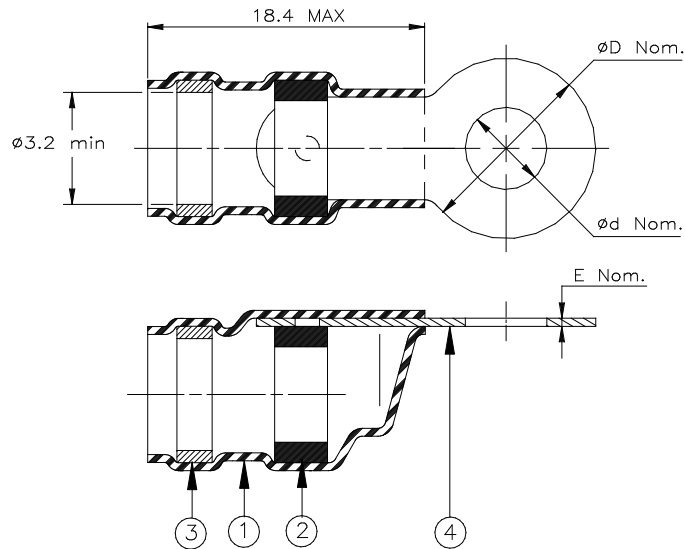

Product Name	Product Dimensions		
	$\varnothing D (\pm 0.1)$	$\varnothing d$	E
W-062-05	6.35	M3.5	0.35
W-062-07	5.08	M2	0.35
W-062-09	9.40	M5	0.35
W-062-16	8.0	M4	0.55


MATERIALS


1. INSULATION SLEEVE: Heat-shrinkable, transparent blue, radiation cross-linked modified polyvinylidene fluoride.
2. SOLDER PREFORM WITH FLUX:
 SOLDER: TYPE Sn63 per ANSI-J-STD-006.
 FLUX: TYPE ROM1 per ANSI-J-STD-004.
2. MELTABLE SEALING RING: Thermally stabilized thermoplastic. Color: blue.
4. RING TERMINAL: Tin plated brass.

APPLICATION

1. These controlled soldering devices are designed for termination of a bare or tin plated copper wire, having an insulation rated for at least 125°C to a ring terminal.
2. Temperature range: -55°C to 150°C.

For best results, prepare the cable as shown:

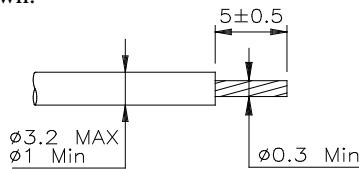

		Raychem DEVICES	TITLE: SOLDERSLEEVE RING TERMINAL		
Unless otherwise specified dimensions are in millimeters.			DOCUMENT NO.: W-062-XX		
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A ROUGHNESS IN MICRON	TE Connectivity reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.	REV : C	DATE : 17-APR-2020	
PREPARED BY: P. TALLY	CAGE CODE: 06090	ECO: ECO-20-005247	SCALE: NTS	SIZE: A	SHEET: 1 of 1

© 2020 TE Connectivity Ltd. Family of Companies. All Rights Reserved.

If this document is printed it becomes uncontrolled. Check for the latest revision.

TE Connectivity, TE connectivity (logo), Raychem, SolderSleeve are trademarks

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[W-062-05](#)