


REVISION			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE OF DWG PER ECO-19-004674	3/26/2019	I. MYONG

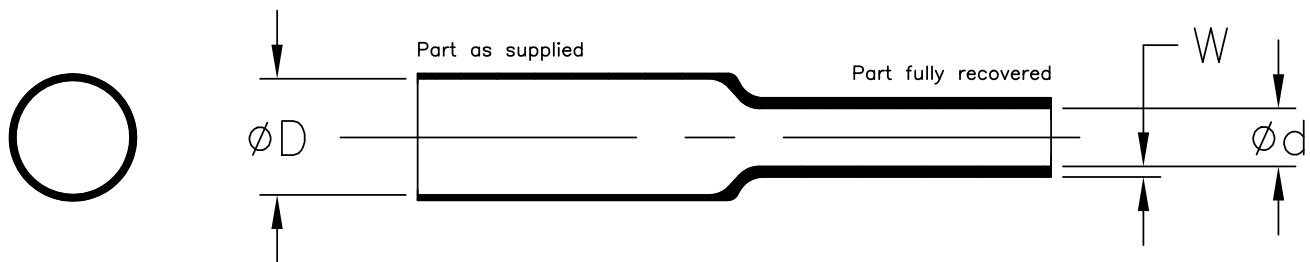

SIZE	INSIDE DIAMETER AS SUPPLIED Ø D MINIMUM		INSIDE DIAMETER AFTER RECOVERY Ø d MAXIMUM		WALL THICKNESS "W" AFTER RECOVERY MM. [IN.]	MASS PER UNIT LENGTH MAX-g/m
	MM.	IN.	MM.	IN.		
3.0/1.5	3.0	.118	1.5	.059	0.70±0.10 [.028±.004]	4.6
5.0/2.5	5.0	.197	2.5	.098	0.75±0.15 [.030±.006]	9.8
8.0/4.0	8.0	.315	4.0	.157	0.80±0.15 [.031±.006]	14.3
12.0/6.0	12.0	.472	6.0	.236	0.90±0.15 [.035±.006]	22.9
18.0/9.0	18.0	.709	9.0	.354	1.00±0.20 [.039±.008]	35
24.0/12.0	24.0	.945	12.0	.472	1.10±0.20 [.043±.008]	55.69
40.0/20.0	40.0	1.575	20.0	.789	1.30±0.25 [.051±.009]	103.5
50.0/30.0	50.0	1.969	30.0	1.181	1.50±0.30 [.059±.012]	176

NOTES:

1. THIS PRODUCT IS DESIGNED FOR A WIDE RANGE OF APPLICATIONS, AND MEETS THE PERFORMANCE REQUIREMENTS OF TE SPECIFICATION RW-3044.
2. PACKAGED AND SUPPLIED ON A SPOOL AND LABELED WITH (example: ZH150 8/4-0), PART NUMBERING SYSTEM: ZH150= PART NUMBER, 8/4= ORDER SIZE, -0= BLACK (STANDARD COLOR).
3. ALWAYS ORDER THE LARGEST SIZE THAT WILL SHRINK SNUGLY OVER THE COMPONENT TO BE COVERED.
4. FOR MATERIAL AND FINISH INFORMATION REFER TO RW-3044 SPECIFICATION. FOR SPECIAL ORDER SIZES, CONTACT TE CONNECTIVITY.

Raychem Harness & Components CUSTOMER DRAWING

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. AND INCH DIMENSIONS ARE IN SHOWN IN (PARENTHESES).		 TE Connectivity	
DECIMALS: .000 ± 0.000 .00 ± 0.00 .0 ± 0.0	ANGLES: ± 0° 00'		
TE CONNECTIVITY RESERVES THE RIGHT TO AMEND THIS DRAWING AT ANYTIME. USERS SHOULD EVALUATE THE SUITABILITY OF THE PRODUCT FOR THEIR APPLICATION.		TITLE: ZH150 TUBING, HEAT SHRINKABLE, FLEXIBLE FLAME RETARDED, HALOGEN FREE	
		DRAWING NO: ZH150	
DRAWN: 15Mar2019 G.Rositano	APPROVED: 22Mar2019 I.Myong	CAGE CODE 06090	CAD FILE: ZH150_cd
SIZE: A		SCALE: 	THIRD ANGLE PROJ. 
© 2019 TE Connectivity Corporation. All rights reserved.		SHEET: 1_OF_1	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[EK8084-000](#)