

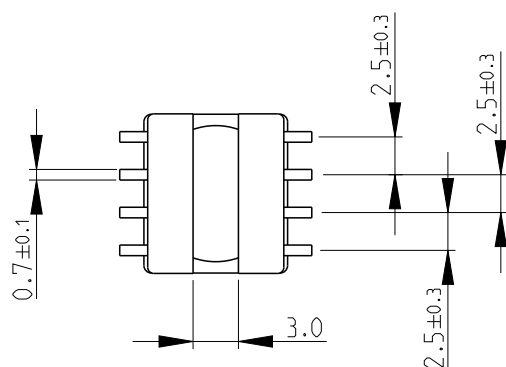
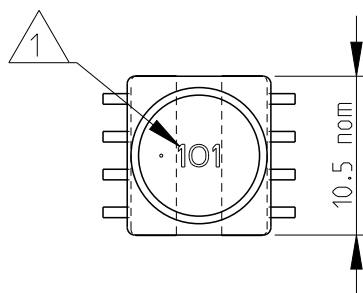


LOC	DIST	REVISIONS					
E	B	P	LTR	DESCRIPTION	DATE	DWN	APVD
			BA2	ECR-13-015529	04OCT2013	KR	TN

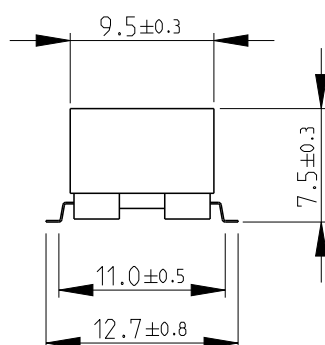


RECOMMENDED LAND PATTERN FOR
INDUCTANCE VALUES 100 μ H OR HIGHER

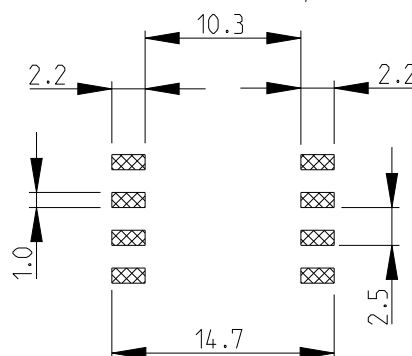

RoHS Compliant


RECOMMENDED LAND PATTERN FOR
INDUCTANCE VALUES 1.5 μ H - 82 μ H

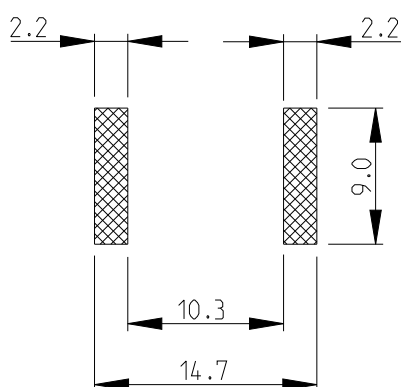


INDUCTANCE CODE

2

FOR FURTHER INFORMATION SEE DATA SHEET FOR
3632 SERIES-SHIELDED SMD POWER INDUCTORS



SCHEMATIC DIAGRAM




2008

RELEASED FOR PUBLICATION

THIS DRAWING IS UNPUBLISHED.

ALL RIGHTS RESERVED.

BY -
COPYRIGHT 2008

DIMENSIONS:		DWN	03-Sep-08	MATERIAL	-	FINISH	-
mm		SUBHASH.M					
TOLERANCES UNLESS OTHERWISE SPECIFIED:		CHK	03-Sep-08	 TE Connectivity			
		PRAKASH.S					
		APVD	03-Sep-08				
		STEPHEN.P					
0 PLC ± 0.2		PRODUCT SPEC		NAME			
1 PLC ± 0.1		-					
2 PLC $\pm$		APPLICATION SPEC		SHIELDED SMD POWER INDUCTOR SERIES 3632B			
3 PLC $\pm$		-					
4 PLC $\pm$							
ANGLES $\pm 5^\circ$							
		WEIGHT	-	SIZE	A 4	CAGE CODE	00779
				DRAWING NO	C=	1625813	RESTRICTED TO
Customer Drawing				SCALE	2:1	SHEET	1 OF 1
						REV	BA2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[3632B682LL](#)