


REVISION

REV	DESCRIPTION	DATE
H1	REVISED PER ECO-11-005139	29MAR11

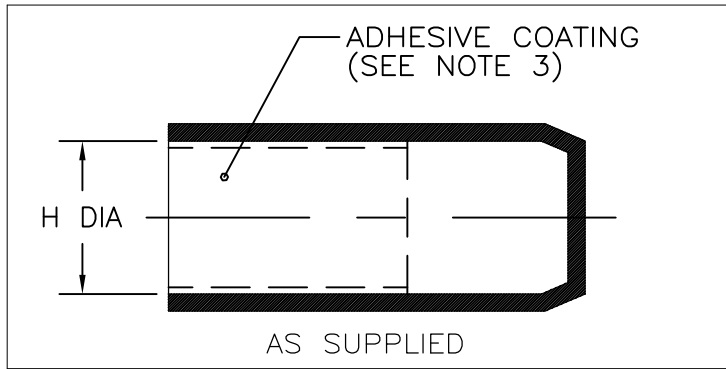

NOTES:

- All dimensions are in $\frac{\text{inches}}{\text{[millimeters]}}$
- Dimensions appearing in table are as follows:
 - a - As Supplied
 - b - After Unrestricted Recovery
- Adhesive is optional. As supplied dimensions appearing in table are for uncoated parts. When adhesive is added, entry diameters will be reduced by .06 max.
- Part numbers SSC-2 thru SSC-7 available with valves by adding TV to the part number.
- Material: polyolefin, commercial, rigid per PPS-3011/25. Adhesive: PPS 3012/70.
- Parts are to be marked with part number in white ink. (IE. SSC-X)
- SSC-1 has a smooth coating of adhesive. SSC-2 thru SSC-7 have the adhesive applied in a spiral bead.

PART NUMBER	H		P +15% -10% b	W ±20% b
	Min a	Max b		
SSC-1	$\frac{.39}{[10]}$	$\frac{.16}{[4]}$	$\frac{1.5}{[38,0]}$	$\frac{.08}{[2,0]}$
SSC-2	$\frac{.79}{[20]}$	$\frac{.30}{[7,5]}$	$\frac{2.2}{[55,0]}$	$\frac{.09}{[2,3]}$
SSC-3	$\frac{1.38}{[35]}$	$\frac{.59}{[15]}$	$\frac{3.5}{[90,0]}$	$\frac{.12}{[3,0]}$
SSC-4	$\frac{2.17}{[55]}$	$\frac{.98}{[25]}$	$\frac{5.6}{[143,0]}$	$\frac{.13}{[3,3]}$
SSC-5	$\frac{2.95}{[75]}$	$\frac{1.25}{[32]}$	$\frac{5.9}{[150,0]}$	$\frac{.13}{[3,3]}$
SSC-5M1	$\frac{2.95}{[75]}$	$\frac{1.25}{[32]}$	$\frac{3.1}{[79,3]}$	$\frac{.13}{[3,3]}$
SSC-6	$\frac{3.94}{[100]}$	$\frac{1.77}{[45]}$	$\frac{6.4}{[162,0]}$	$\frac{.15}{[3,8]}$
SSC-7	$\frac{4.72}{[120]}$	$\frac{2.76}{[70]}$	$\frac{5.7}{[145,0]}$	$\frac{.15}{[3,8]}$

ORDERING INFORMATION:

End cap, uncoated:
SSC-X/U

Self sealing end cap with thermoplastic adhesive:
SSC-X/239 and valves: SSC-XTV/239.

IF THIS DOCUMENT IS PRINTED IT BECOMES UNCONTROLLED.CHECK FOR THE LATEST REVISION.

SPECIFICATION CONTROL DRAWING		
	TE Connectivity	WIRE AND HARNESSING PRODUCTS 307 CONSTITUTION DRIVE MENLO PARK, CALIFORNIA 94025
END CAPS		
SIZE A	CODE IDENT. NO. 06090	DWG. NO. SSC-X
DO NOT SCALE THIS DRAWING		SHEET 1 OF 1

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE INCHES. METRIC DIMENSIONS ARE IN BRACKETS.

DECIMAL TOLERANCES
 .XXX ± 0.005 [0.13 mm]
 .XX ± 0.010 [0.25 mm]
 .X ± 0.020 [0.50 mm]

ANGLE TOLERANCE
 .X ± 0.5 DEG.

DRAWN
G. ROSITANO

DATE
10/02/2001

MATERIAL

FINISH

THIRD ANGLE PROJECTION

RPN

CAD FILE
MP04019

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TE Connectivity:

[SSC22AGA](#) [SSC12AMA](#) [SSC12APF10.00](#) [SSC12EIA](#) [SSC12AGA](#) [SSC22EBA](#) [SSC12AKA](#) [SSC12ABA](#)
[SSC12ALA](#) [SSC12AEA](#) [SSC12BPA](#) [SSC12PCA](#) [SSC-5/U](#) [SSC-5/239](#) [SSC-6/U](#) [SSC-2/U](#) [SSC-6/172](#) [SSC-3/U](#)
[SSC-5TV/239](#) [SSC-4/U](#)