

COIL: @ +25 °C  
 RESISTANCE 700 OHMS ± 10%  
 NOMINAL VOLTAGE 26.5 VDC  
 MUST OPERATE 15.0 VDC  
 MUST RELEASE 8.0 VDC MAX 1.5 VDC MIN


**ENVIRONMENT:**

VIBRATION 10 CPS TO 3000 CPS @ 30 g's  
 SHOCK 100 g's 6 ± 1 MS. DURATION  
 TEMPERATURE -65 °C TO +125 °C

NOTES: MAXIMUM TRANSIENT SUPPRESSED VOLTAGE  
OF -48 VDC WITH BIFILAR COIL  
OPERATE & RELEASE 5 MS MAX.  
CONTACT STABILIZATION 2.5 MS MAX.

**CUSTOMER DATA SHEET**

BLUE BEAD

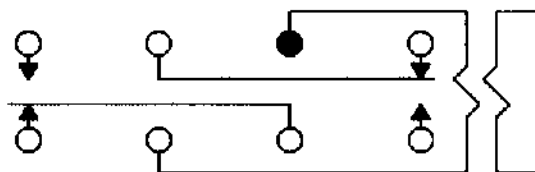

CONTACT RATING: LOW LEVEL TO 2A  
28 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 8/14/95 CK. *[Signature]*


**COMMUNICATIONS**  
**INSTRUMENTS, INC.**

CUST. QPL  
 CUST. NO. M39016/22-009M

TYPE "HMB" RELAY

**HMB1201K01M**

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[HMB1201K01M](#)