

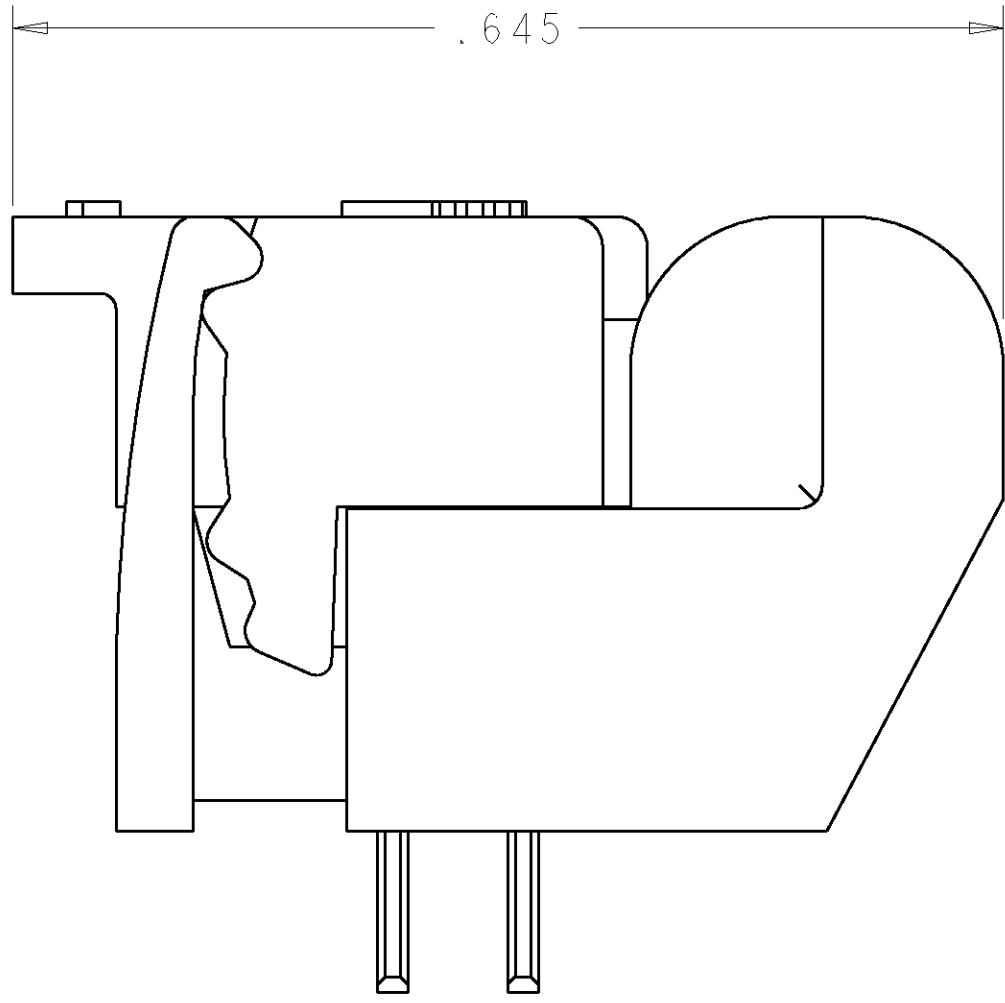
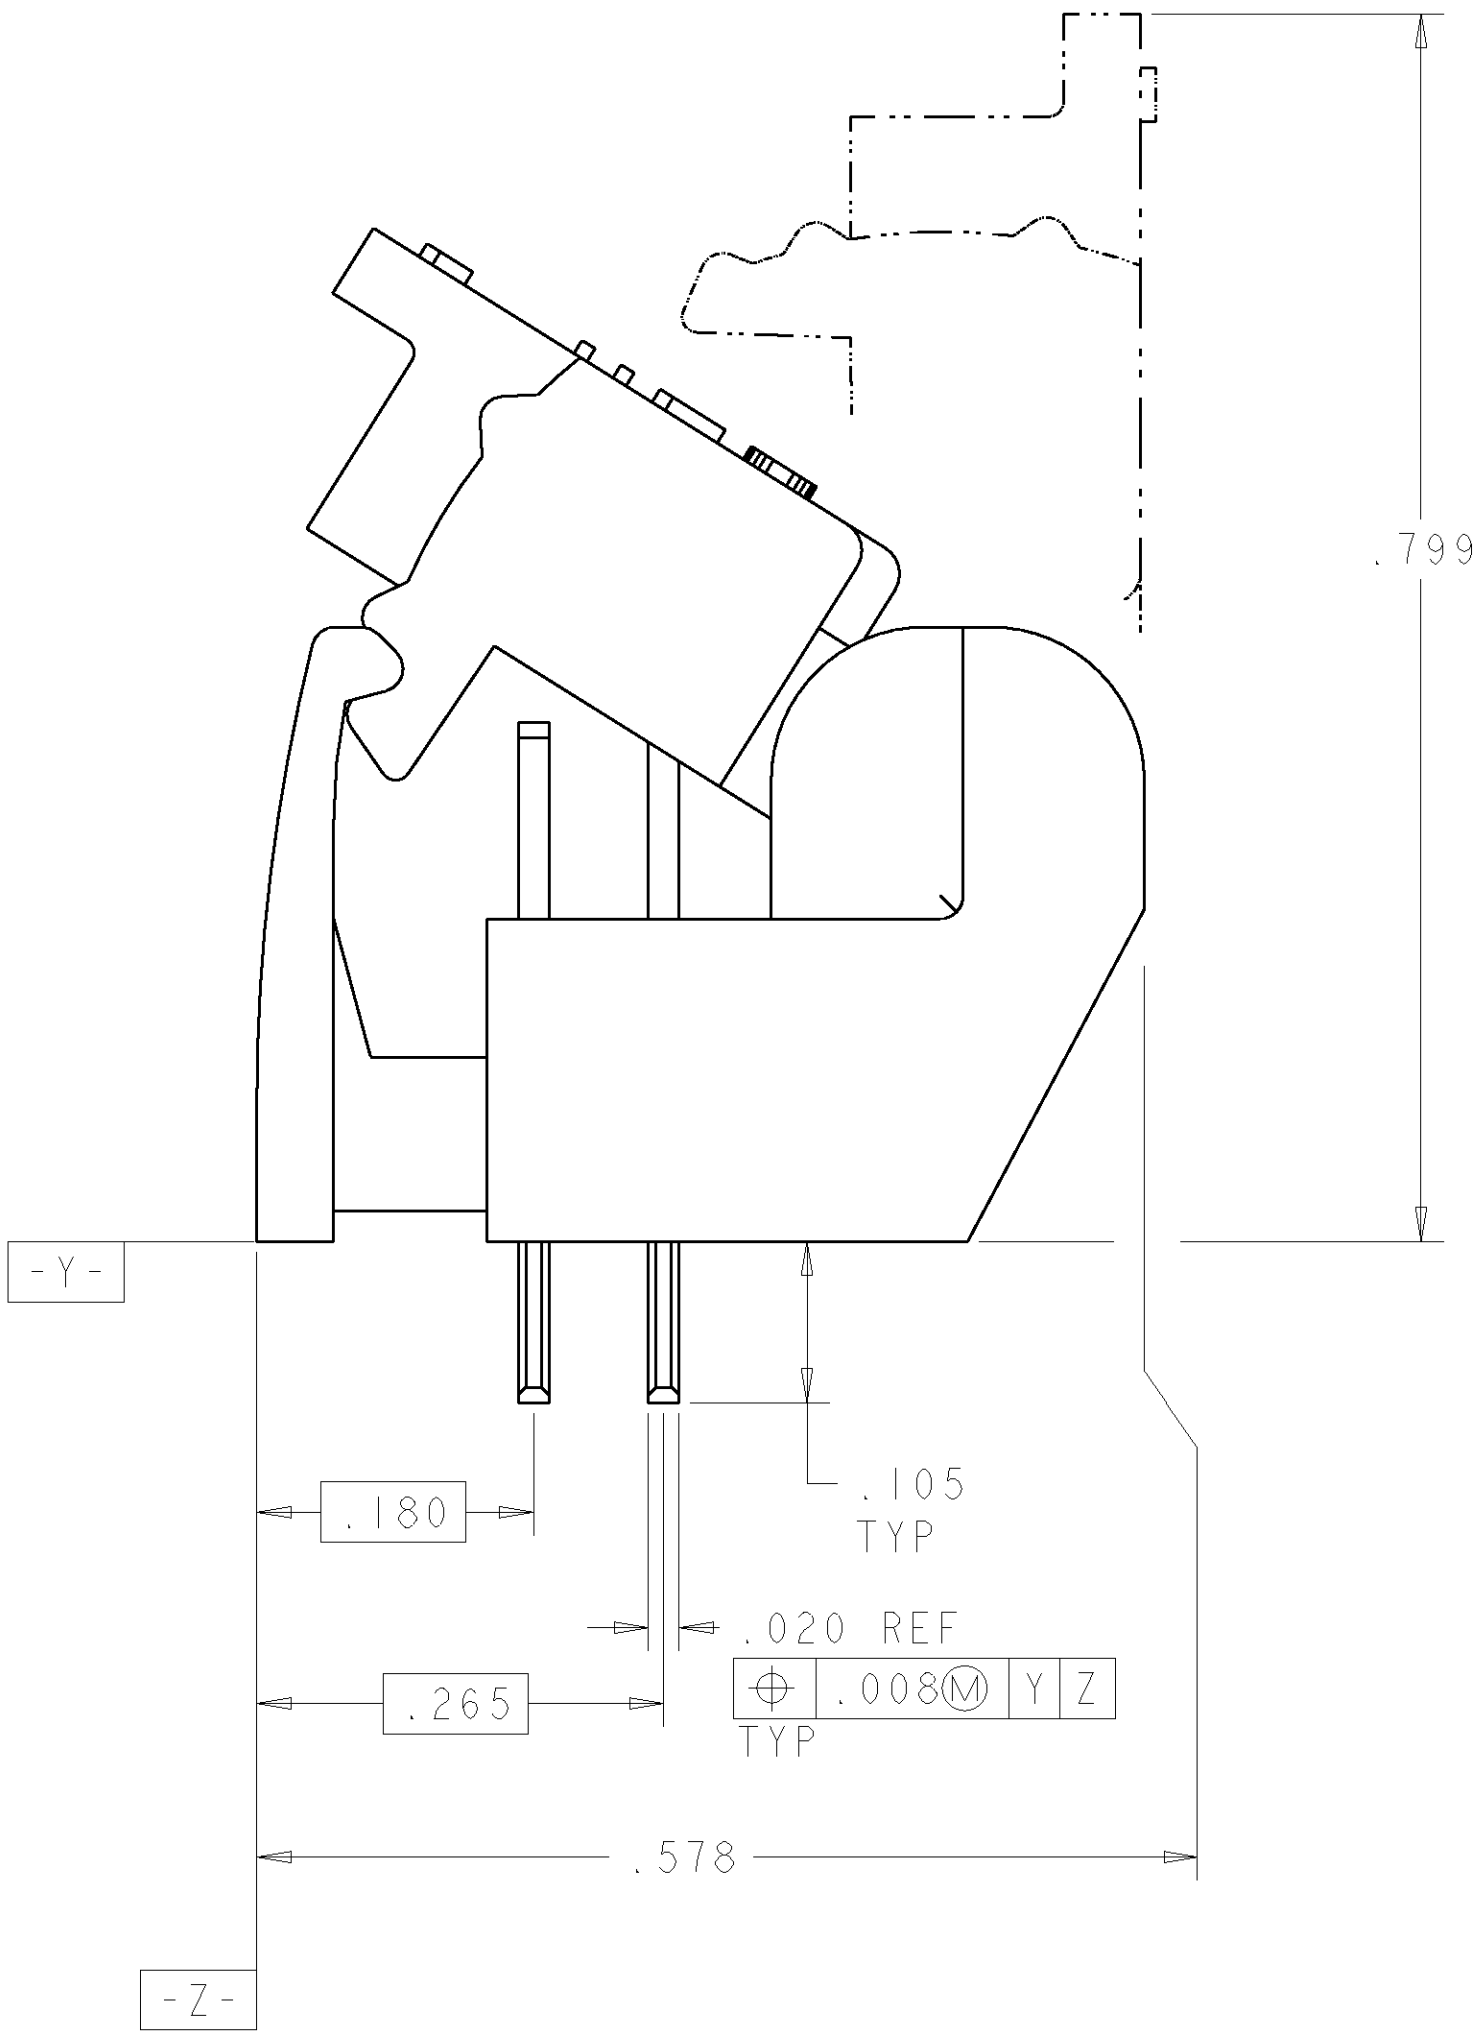
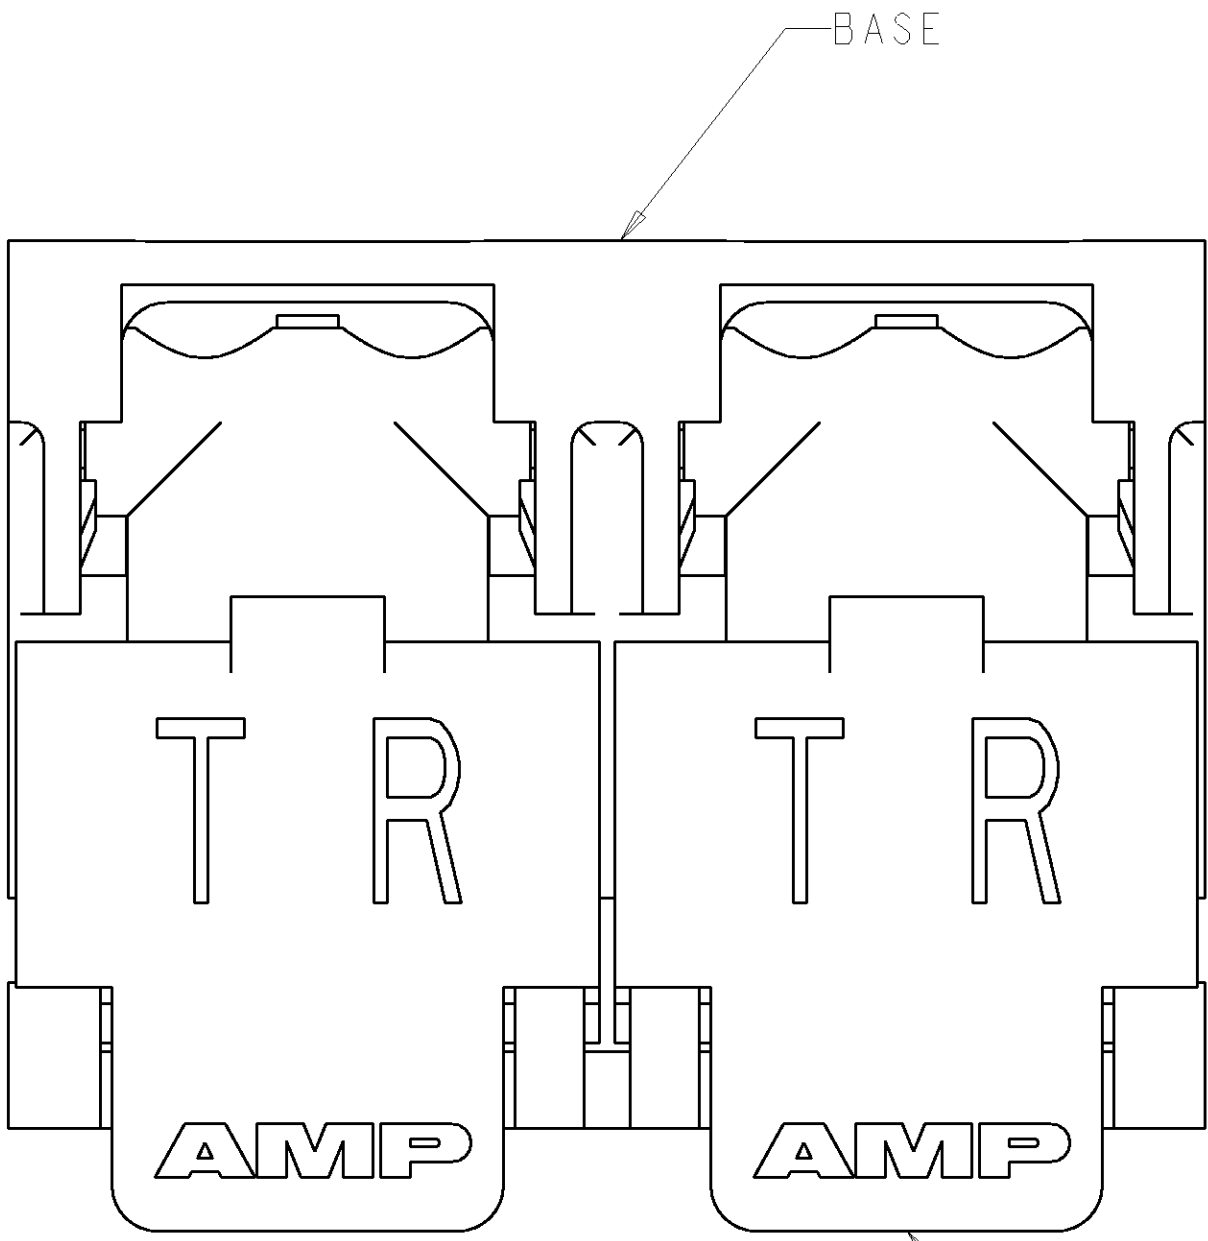


LOC		DIST		REVISONS				
GP	0	F	LTR	DESCRIPTION		DATE	DWN	APVD
		B		REV: EC OUIIC-0007-01		22JAN01	JA	TW
		C		REVISED PER EC OS15-0450-02		21JAN2003	DLD	RPM
		D		REVISED PER EC OS15-0324-03		08DEC2003	JB	CF

- ⚠ MATERIAL: BASE - POLYESTER MOLDING COMPOUND, BLACK.
WIRE STUFFER: - POLYESTER MOLDING COMPOUND, SEE TABLE FOR COLOR.
TERMINAL - COPPER ALLOY, PLATED WITH 3.81µm MINIMUM THICK TIN OVER 1.27µm MINIMUM THICK NICKEL UNDERPLATE.
- ⚠ EACH WIRE ENTRY HOLE ACCEPTS ONE UNSTRIPPED SOLID COPPER 22-26 AWG WIRE WITH WIRE INSULATION DIAMETER RANGE FROM .060 THROUGH .040. OTHER WIRE SIZES AND TYPES SHALL BE SUBMITTED TO AMP ENGINEERS FOR APPLICATION APPROVAL.
3. SOLDER TABS PROVIDED FOR PERMANENT BOARD MOUNTING.
- ⚠ LOCATION OF HOLE PATTERN DETERMINED BASED ON CUSTOMER REQUIREMENTS.

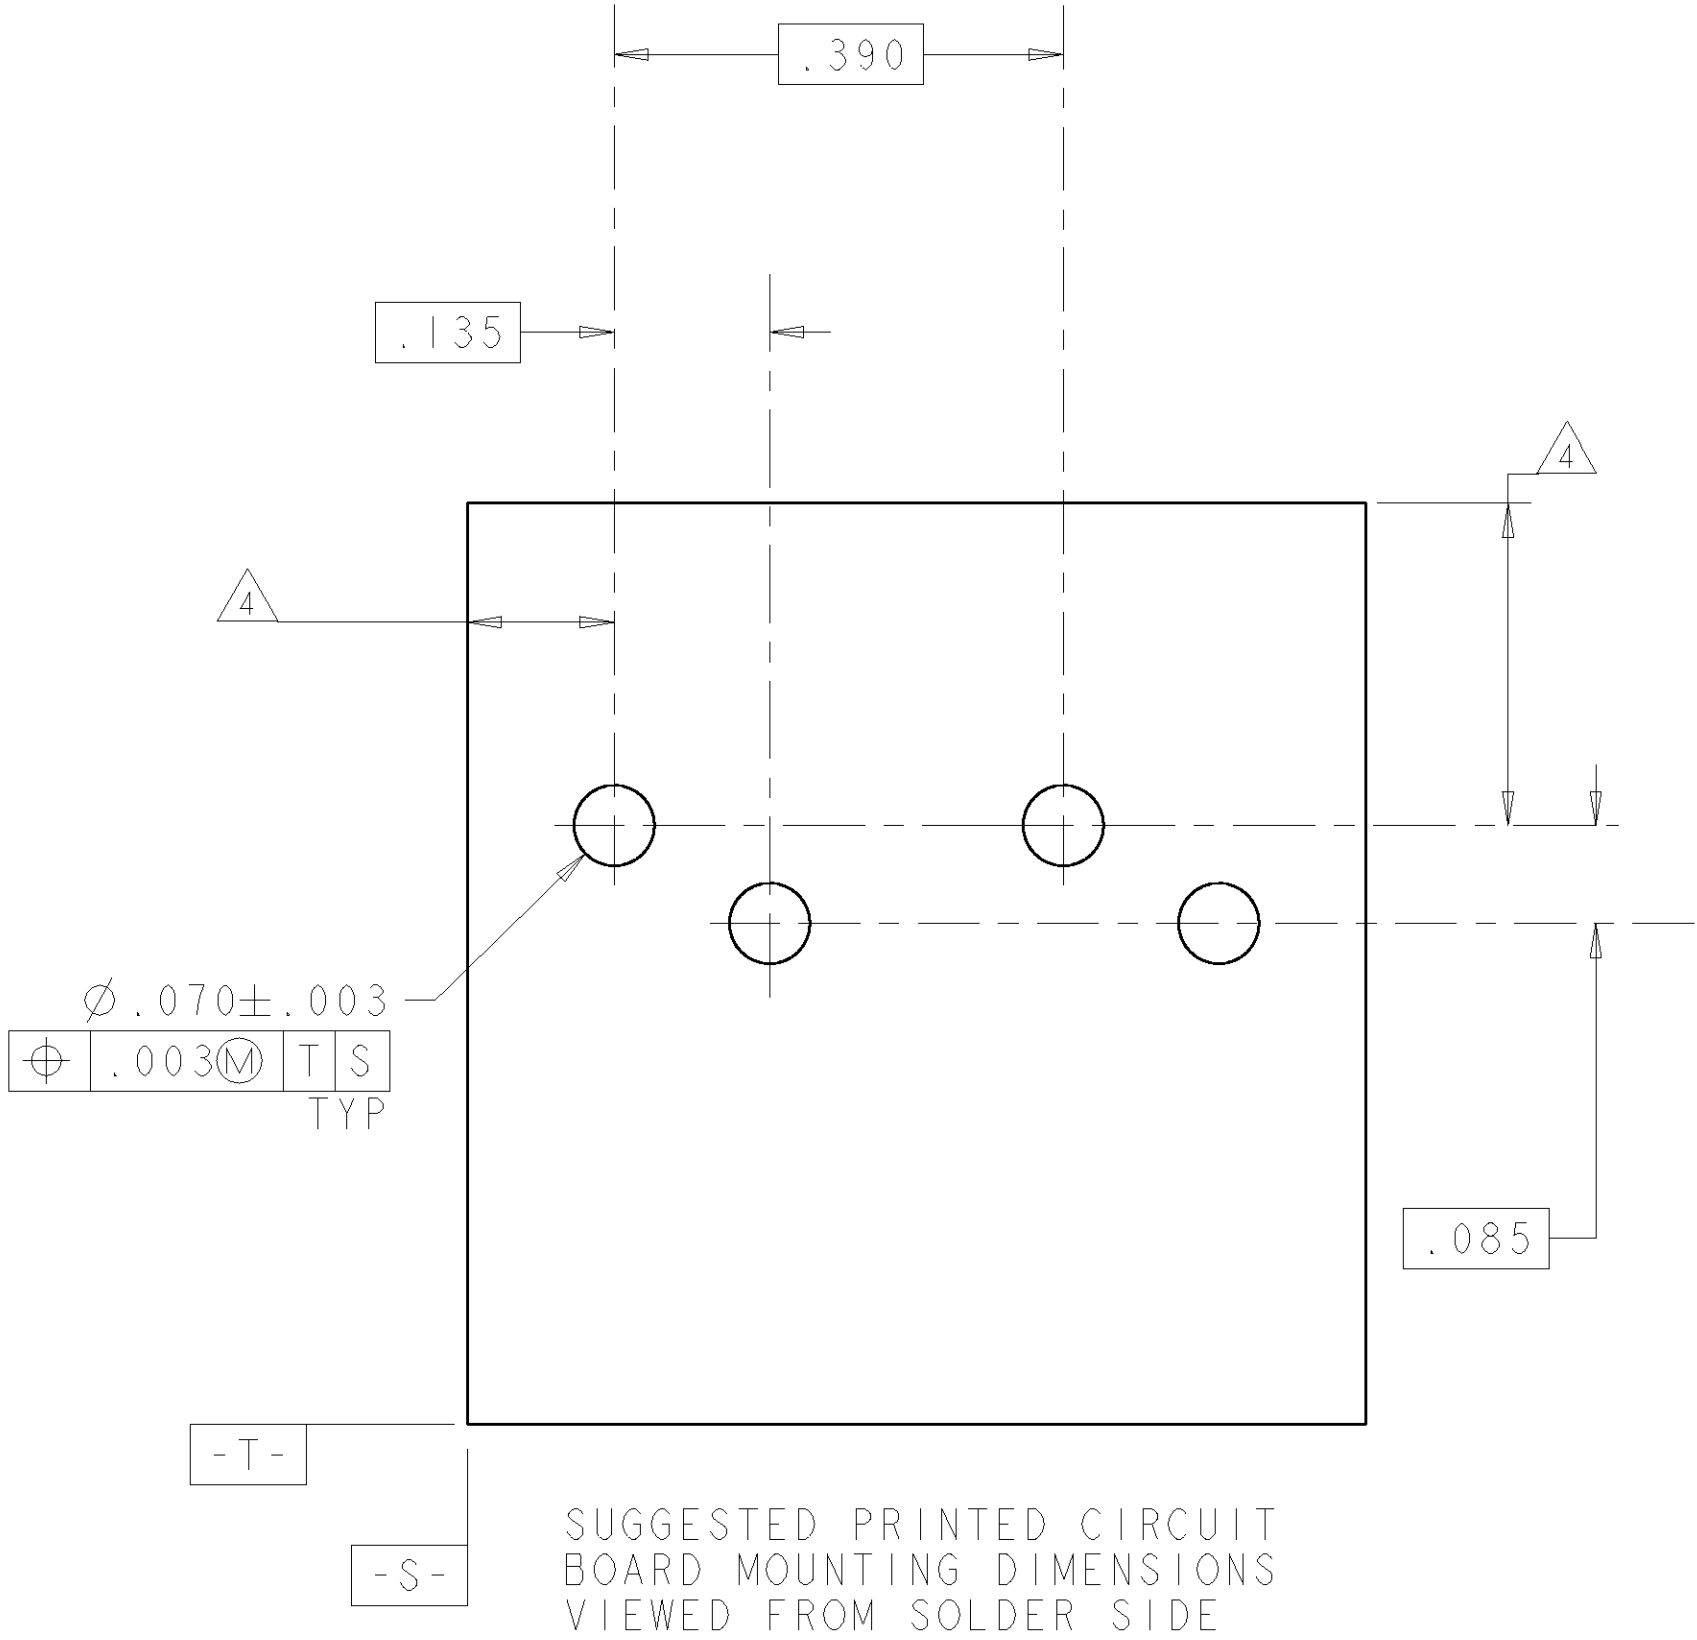

CLOSED POSITION

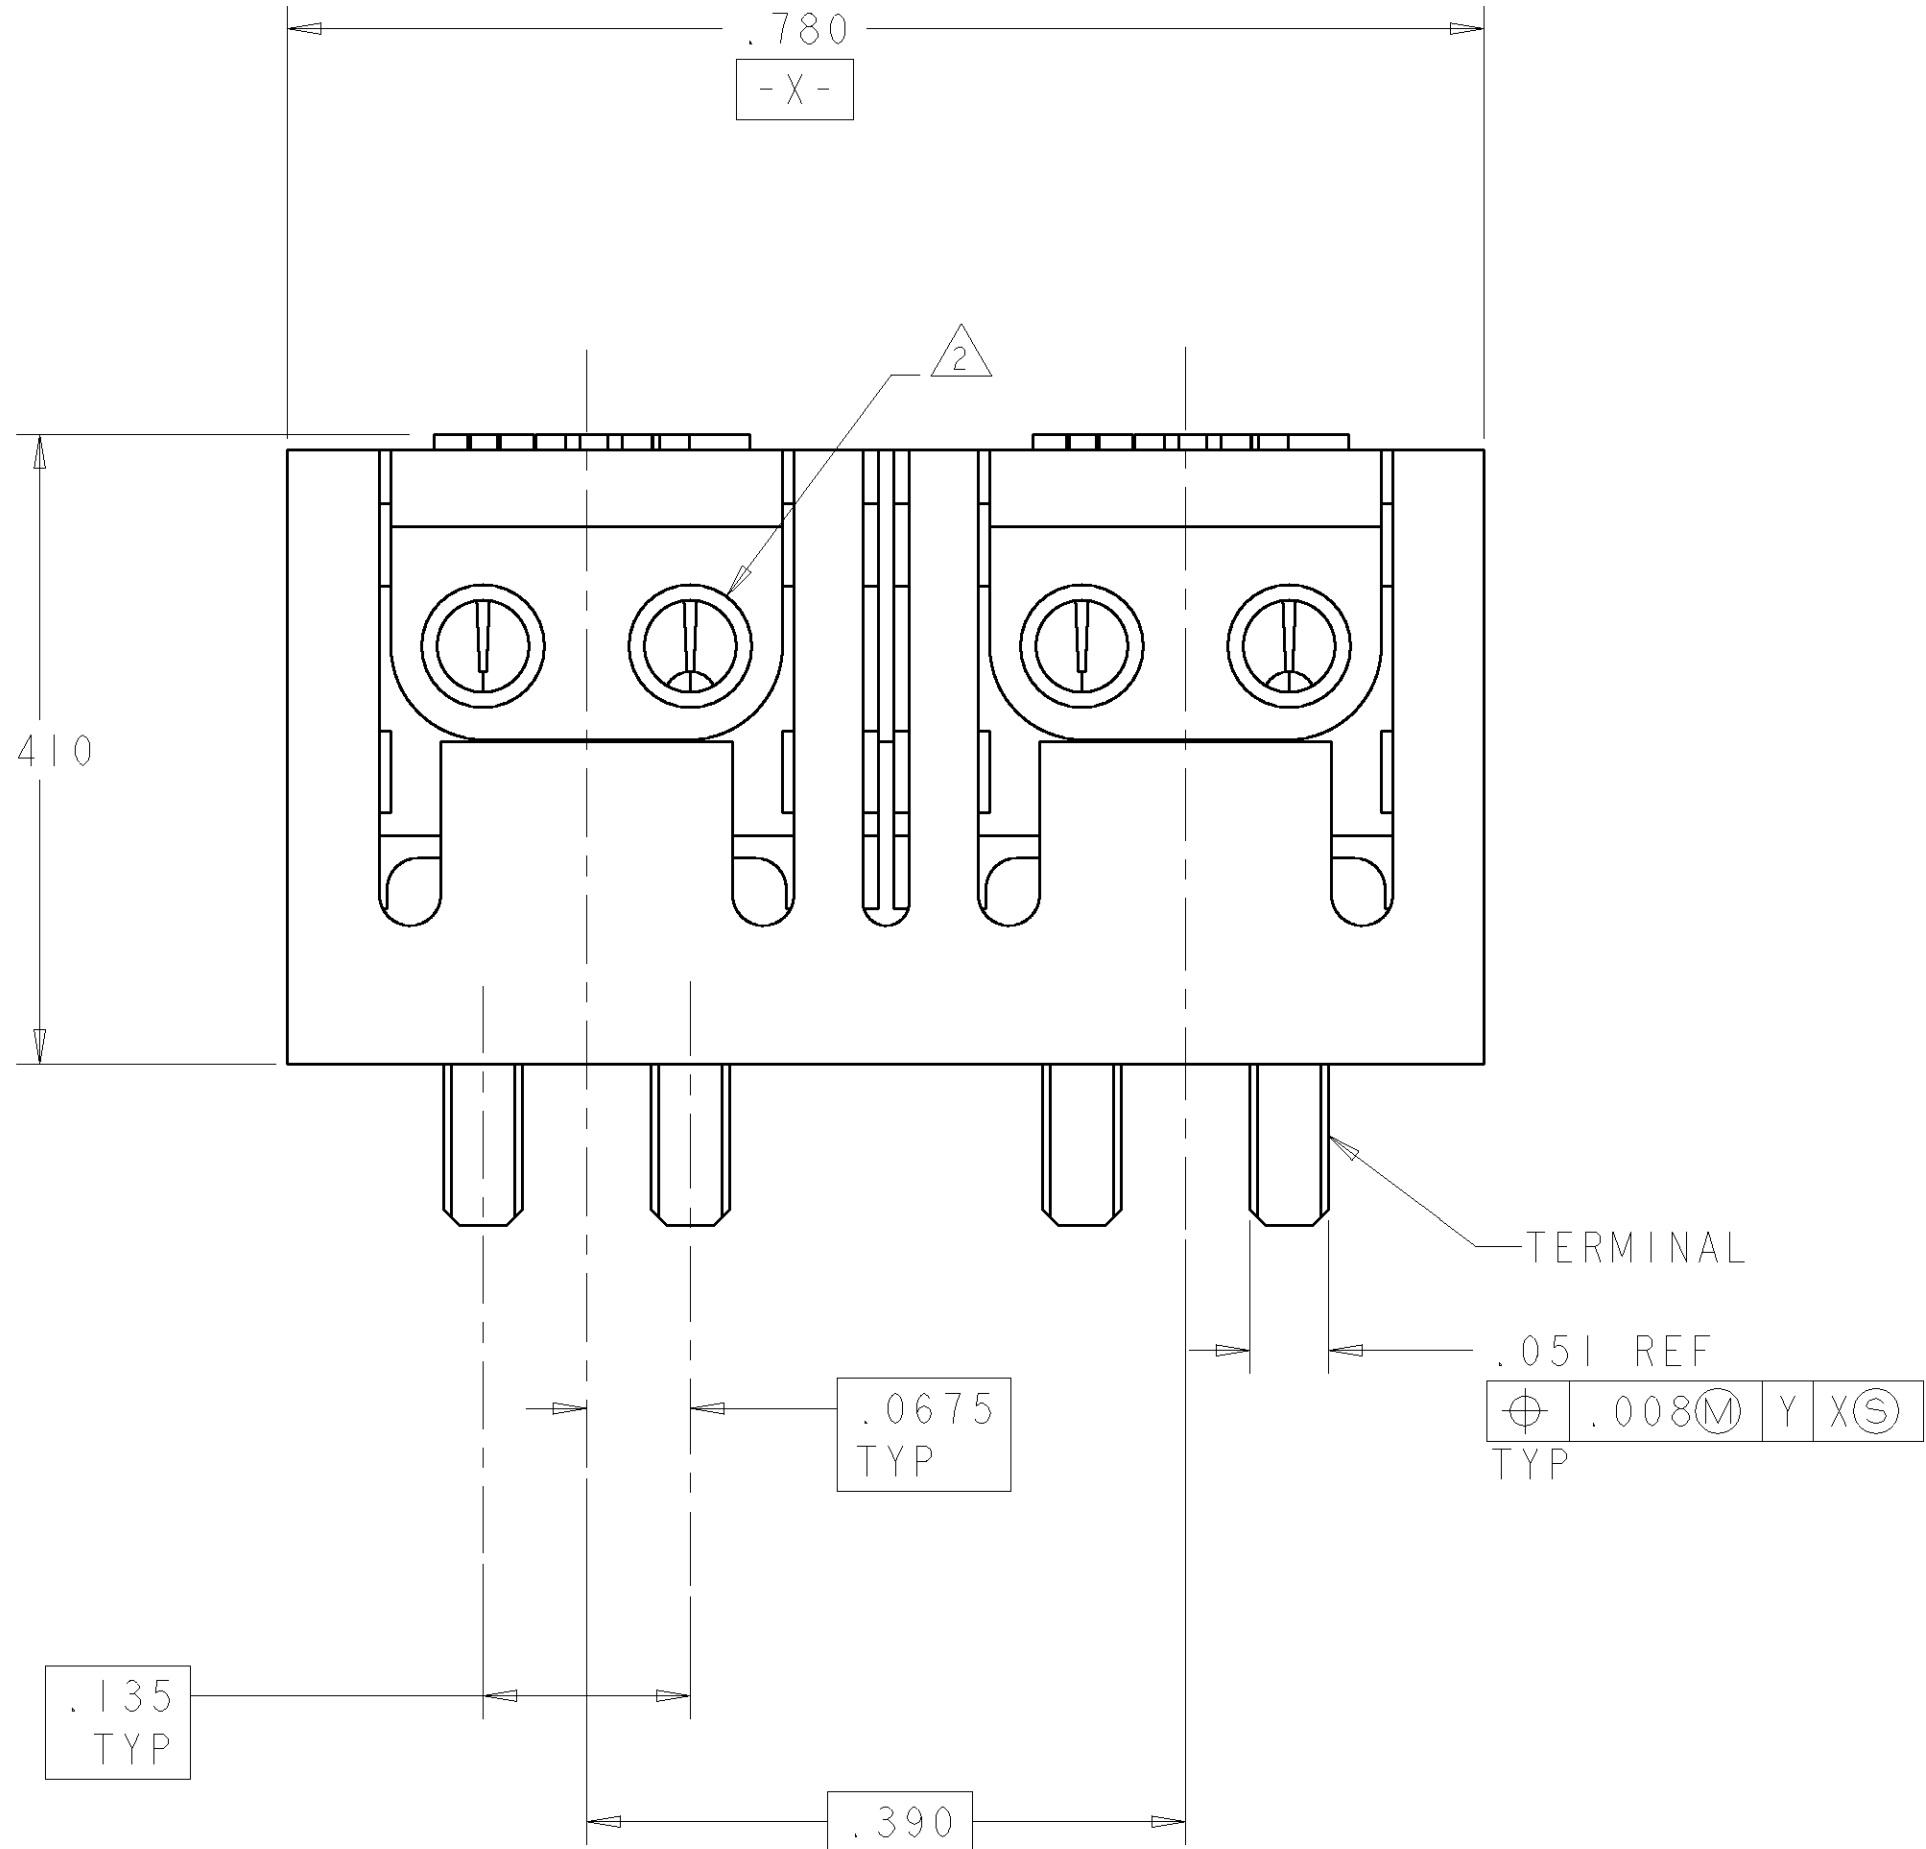

SUGGESTED PRINTED CIRCUIT BOARD MOUNTING DIMENSIONS VIEWED FROM SOLDER SIDE

BLACK	1339374-2
CLEAR	1339374-1
STUFFER COLOR	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. ANY DISCREPANCY TO THE ORIGINAL AND THE CONTROLLED DOCUMENT ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		DWN J. AHERON	30NOV00	NAME ASSEMBLY, DOUBLE PAIR, DOUBLE ENTRY, PIVOT II CONNECTOR	
DIMENSIONS: INCHES		CHK S. ROBERTSON	30NOV00		
TOLERANCES, UNLESS OTHERWISE SPECIFIED:		APVD	PRODUCT SPEC	SIZE	CAGE CODE
9 PLC ±.01			APPLICATION SPEC	00779	1339374
1 PLC ±.01					
2 PLC ±.005					
3 PLC ±.005					
4 PLC ±.005					
ANGLES					
FINISH					
MATERIAL		WEIGHT			
		CUSTOMER DRAWING			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1339374-2](#)