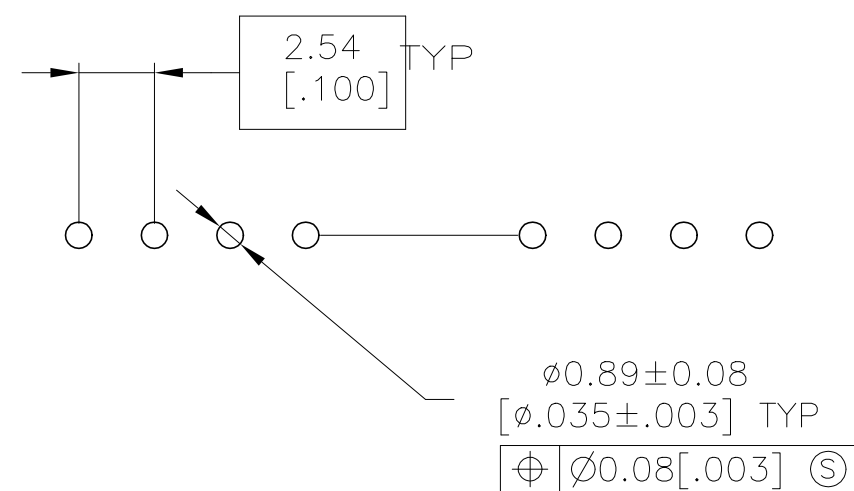


- ① .000100 BRIGHT TIN—LEAD OVER .000050 NICKEL.
- ② POINT OF MEASUREMENT FOR PLATING THICKNESS.
- ③ THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND THE HOUSING.
- ④ ON ASSEMBLIES WITH FOUR OR MORE POSITIONS, TWO POLARIZATION SLOTS.
ON ASSEMBLIES WITH TWO OR THREE POSITIONS, ONE POLARIZATION SLOT.
- ⑤ .000100 BRIGHT TIN OVER .000050 NICKEL.
- ⑥ PRELIMINARY PART—NOT RELEASED FOR PRODUCTION.
- ⑦ .000100 MATTE TIN OVER .000050 NICKEL.
- ⑧ HIGH TEMPERATURE CONFIGURATION
- ⑨ STANDOFFS NOT PRESENT ON UNDERSIDE OF ASSEMBLY
- ⑩ SUPERSEDED BY P/N 5-103639-2.
- ⑪ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI
- ⑫ 0.25 [.010] RECESS PERMISSIBLE IN THIS AREA FOR MOLD SHUT OFF



RECOMMENDED HOLE LAYOUT

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S.SHUEY	05MAR91		TE Connectivity						
		CHK L.CASTAGNA	27MAR93								
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD L.CASTAGNA	27MAR93		NAME				
		0 PLC ± - 1 PLC ± - 2 PLC ± 0.13[.005] 3 PLC ± - 4 PLC ± - 4 ANGLES ± -		PRODUCT SPEC		HDR ASY,VERT,SNGL ROW 2.54[100] C/L 0.64[025] SQ PST, WTH PLZN<CHNG,AMPMODU MTE					
				108-25034							
				APPLICATION SPEC		114-25026					
MATERIAL		FINISH		WEIGHT -	SIZE A2	CAGE CODE -	DRAWING NO C=103639	RESTRICTED TO -			
HOUSING:		SEE TABLE		CUSTOMER DRAWING					SCALE 4:1	SHEET 1 OF 2	REV AA

4

3

2

1

THIS DRAWING IS UNPUBLISHED.	RELEASED FOR PUBLICATION	103639 , 103639
© COPYRIGHT 103639y --	ALL RIGHTS RESERVED.	

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	--	SEE SHEET 1	--	--	--

D

D

C








C

B

B

A

A

		64.01 [2.520]	65.91 [2.595]	24	25	7-103639-4	OBSOLETE	
		61.47 [2.420]	63.37 [2.495]	23	24	7-103639-3	OBSOLETE	
		58.93 [2.320]	60.83 [2.395]	22	23	7-103639-2	OBSOLETE	
		56.39 [2.220]	58.29 [2.295]	21	22	7-103639-1		
		53.85 [2.120]	55.75 [2.195]	20	21	7-103639-0	OBSOLETE	
		51.31 [2.020]	53.21 [2.095]	19	20	6-103639-9		
		48.77 [1.920]	50.67 [1.995]	18	19	6-103639-8	OBSOLETE	
		46.23 [1.820]	48.13 [1.895]	17	18	6-103639-7	OBSOLETE	
		43.69 [1.720]	45.59 [1.795]	16	17	6-103639-6		
		41.15 [1.620]	43.05 [1.695]	15	16	6-103639-5		
		38.61 [1.520]	40.51 [1.595]	14	15	6-103639-4		
		36.07 [1.420]	37.97 [1.495]	13	14	6-103639-3		
		33.53 [1.320]	35.43 [1.395]	12	13	6-103639-2		
		30.99 [1.220]	32.89 [1.295]	11	12	6-103639-1		
		28.45 [1.120]	30.35 [1.195]	10	11	6-103639-0		
		25.91 [1.020]	27.81 [1.095]	9	10	5-103639-9		
		23.37 [.920]	25.27 [0.995]	8	9	5-103639-8		
		20.83 [.820]	22.73 [.895]	7	8	5-103639-7		
		18.29 [.720]	20.19 [.795]	6	7	5-103639-6		
		15.75 [.620]	17.65 [.695]	5	6	5-103639-5		
		13.21 [.520]	15.11 [.595]	4	5	5-103639-4		
		10.67 [.420]	12.57 [.495]	3	4	5-103639-3		
		8.13 [.320]	10.03 [.395]	2	3	5-103639-2		
		5.59 [.220]	7.49 [.295]	1	2	5-103639-1		
REMARKS	PLATING	C	B	A	NO. OF POSN	PART NO.		

 SUPERSEDED BY 7-103639-1

 OBSOLETE


 OBSOLETE

 OBSOLETE

 OBSOLETE

 SUPERSEDED BY 6-103639-0

		15.75 [.620]	17.65 [.695]	5	6	3-103639-3
		10.67 [.420]	12.57 [.495]	3	4	3-103639-2
		8.13 [.320]	10.03 [.395]	2	3	3-103639-1
		30.99 [1.220]	32.89 [1.295]	11	12	3-103639-0
		25.91 [1.020]	27.81 [1.095]	9	10	2-103639-9
		20.83 [.820]	22.73 [.895]	7	8	2-103639-8
		18.29 [.720]	20.19 [.795]	6	7	2-103639-7
		13.21 [.520]	15.11 [.595]	4	5	2-103639-6
		5.59 [.220]	7.49 [.295]	1	2	2-103639-5
		64.01 [2.520]	65.91 [2.595]	24	25	2-103639-4
		61.47 [2.420]	63.37 [2.495]	23	24	2-103639-3
		58.93 [2.320]	60.83 [2.395]	22	23	2-103639-2
		56.39 [2.220]	58.29 [2.295]	21	22	2-103639-1
		53.85 [2.120]	55.75 [2.195]	20	21	2-103639-0
		51.31 [2.020]	53.21 [2.095]	19	20	1-103639-9
		48.77 [1.920]	50.67 [1.995]	18	19	1-103639-8
		46.23 [1.820]	48.13 [1.895]	17	18	1-103639-7
		43.69 [1.720]	45.59 [1.795]	16	17	1-103639-6
		41.15 [1.620]	43.05 [1.695]	15	16	1-103639-5
		38.61 [1.520]	40.51 [1.595]	14	15	1-103639-4
		36.07 [1.420]	37.97 [1.495]	13	14	1-103639-3
		33.53 [1.320]	35.43 [1.395]	12	13	1-103639-2
		30.99 [1.220]	32.89 [1.295]	11	12	1-103639-1
		28.45 [1.120]	30.35 [1.195]	10	11	1-103639-0
		25.91 [1.020]	27.81 [1.095]	9	10	103639-9
		23.37 [.920]	25.27 [0.995]	8	9	103639-8
		20.83 [.820]	22.73 [.895]	7	8	103639-7
		18.29 [.720]	20.19 [.795]	6	7	103639-6
		15.75 [.620]	17.65 [.695]	5	6	103639-5
		13.21 [.520]	15.11 [.595]	4	5	103639-4
		10.67 [.420]	12.57 [.495]	3	4	103639-3
		8.13 [.320]	10.03 [.395]	2	3	103639-2
		5.59 [.220]	7.49 [.295]	1	2	103639-1
REMARKS	PLATING	C	B	A	NO. OF POSN	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S.SHUEY 05MAR91	 TE Connectivity			
		CHK L.CASTAGNA 27MAR93				
DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD L.CASTAGNA 27MAR93	NAME	HDR ASY,VERT,SNGL ROW 2.54[.100]C/L 0.64[.025]SQ PST, WTH PLZN<CHNG,AMPMODU MTE		
	0 PLC ± - 1 PLC ± - 2 PLC ± 0.13[.005] 3 PLC ± - 4 PLC ± - ANGLES ± -	PRODUCT SPEC 108-25034 APPLICATION SPEC 114-25026	SIZE A2	CAGE CODE -	DRAWING NO. 103639	RESTRICTED TO -
	MATERIAL HOUSING:	FINISH SEE TABLE	WEIGHT -	CUSTOMER DRAWING		
			SCALE 1:1	SHEET 2 of 2	REV AA	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-103639-2](#)