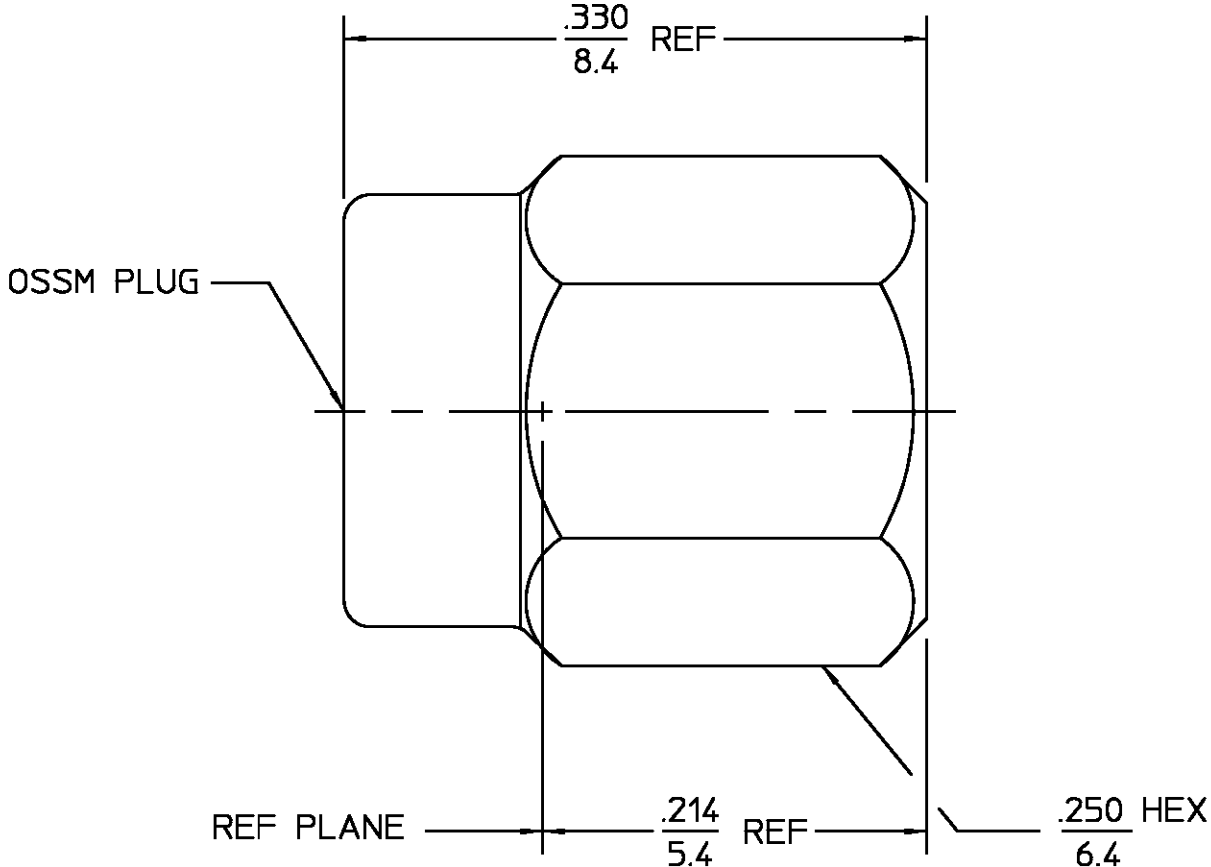


		DESIGNED FOR USE WITH .085 SEMI-RIGID CABLE		REVISIONS																																																																																													
		CABLE ENTRY DIAMETER MINIMUM		REV	DESCRIPTION	DATE	APPROVED																																																																																										
		HOUSING .0875		02 ₃	REVISED	05/05/94	AD																																																																																										
<table><tr><td colspan="2">ELECTRICAL</td><td colspan="2">MECHANICAL</td><td colspan="2">ENVIRONMENTAL</td></tr><tr><td colspan="2">Nominal Impedance (Ohms) 50</td><td colspan="2">Interface Dimensions MIL-STD-348A</td><td colspan="2">Temperature Rating -65°C to +105°C</td></tr><tr><td colspan="2">Frequency Range (GHz) DC to 26.5</td><td colspan="2">Recommended Mating</td><td colspan="2">Vibration MIL-STD-202, Method 204, Condition D</td></tr><tr><td colspan="2">Volt Rating (VRMS MAX) @ Sea Level 250</td><td colspan="2">Torque 7 to 8 In - Lbs</td><td colspan="2">Shock MIL-STD-202, Method 213, Condition I</td></tr><tr><td colspan="2">VSWR 1.035 + .005f(GHz)</td><td colspan="2">Mating Characteristics:</td><td colspan="2">Thermal Shock MIL-STD-202, Method 107, Condition B, Except High Temp +115°C</td></tr><tr><td colspan="2">Insertion Loss (dB MAX) .03√f(GHz)</td><td colspan="2">Insertion (MAX Lbs) N/A</td><td colspan="2">Moisture Resistance MIL-STD-202, Method 106, Except Vibration</td></tr><tr><td colspan="2">RF Leakage (dB MIN) -[90-f(GHz)]</td><td colspan="2">Withdrawal (MIN Oz) N/A</td><td colspan="2">Shall Be Omitted</td></tr><tr><td colspan="2">Corona, 70,000 Ft (VRMS MIN) 190</td><td colspan="2">Force to Engage and Disengage (In/Lbs MAX) 2.0</td><td colspan="2">Corrosion - MIL-STD-202, Method 101, Condition B, 5% salt spray</td></tr><tr><td colspan="2">Dielectric Withstanding Voltage (VRMS MIN) @ Sea Level 750</td><td colspan="2">Center Contact Captivation</td><td colspan="2"></td></tr><tr><td colspan="2">Contact Resistance (Milliohms MAX)</td><td colspan="2">Axial (Lbs) N/A</td><td colspan="2"></td></tr><tr><td colspan="2">Center Contact 2.0</td><td colspan="2">Radial (In/Oz) N/A</td><td colspan="2"></td></tr><tr><td colspan="2">Outer Contact 2.0</td><td colspan="2">Cable Retention</td><td colspan="2"></td></tr><tr><td colspan="2">Cable to Housing 0.5</td><td colspan="2">Axial Force (Lbs) 30</td><td colspan="2"></td></tr><tr><td colspan="2">RF High Potential @ Sea Level (VRMS MIN @ 5 MHz) 500</td><td colspan="2">Torque (In/Oz) 16</td><td colspan="2"></td></tr><tr><td colspan="2">I.R.(Megohms MIN) N/A</td><td colspan="2">Weight (Grams) 1.0</td><td colspan="2"></td></tr></table>		ELECTRICAL		MECHANICAL		ENVIRONMENTAL		Nominal Impedance (Ohms) 50		Interface Dimensions MIL-STD-348A		Temperature Rating -65°C to +105°C		Frequency Range (GHz) DC to 26.5		Recommended Mating		Vibration MIL-STD-202, Method 204, Condition D		Volt Rating (VRMS MAX) @ Sea Level 250		Torque 7 to 8 In - Lbs		Shock MIL-STD-202, Method 213, Condition I		VSWR 1.035 + .005f(GHz)		Mating Characteristics:		Thermal Shock MIL-STD-202, Method 107, Condition B, Except High Temp +115°C		Insertion Loss (dB MAX) .03√f(GHz)		Insertion (MAX Lbs) N/A		Moisture Resistance MIL-STD-202, Method 106, Except Vibration		RF Leakage (dB MIN) -[90-f(GHz)]		Withdrawal (MIN Oz) N/A		Shall Be Omitted		Corona, 70,000 Ft (VRMS MIN) 190		Force to Engage and Disengage (In/Lbs MAX) 2.0		Corrosion - MIL-STD-202, Method 101, Condition B, 5% salt spray		Dielectric Withstanding Voltage (VRMS MIN) @ Sea Level 750		Center Contact Captivation				Contact Resistance (Milliohms MAX)		Axial (Lbs) N/A				Center Contact 2.0		Radial (In/Oz) N/A				Outer Contact 2.0		Cable Retention				Cable to Housing 0.5		Axial Force (Lbs) 30				RF High Potential @ Sea Level (VRMS MIN @ 5 MHz) 500		Torque (In/Oz) 16				I.R.(Megohms MIN) N/A		Weight (Grams) 1.0				HOUSING COUPLING NUT		STAINLESS STEEL PER ASTM-A484 AND ASTM-A582, TYPE 303		GOLD PLATE PER MIL-G-45204	
ELECTRICAL		MECHANICAL		ENVIRONMENTAL																																																																																													
Nominal Impedance (Ohms) 50		Interface Dimensions MIL-STD-348A		Temperature Rating -65°C to +105°C																																																																																													
Frequency Range (GHz) DC to 26.5		Recommended Mating		Vibration MIL-STD-202, Method 204, Condition D																																																																																													
Volt Rating (VRMS MAX) @ Sea Level 250		Torque 7 to 8 In - Lbs		Shock MIL-STD-202, Method 213, Condition I																																																																																													
VSWR 1.035 + .005f(GHz)		Mating Characteristics:		Thermal Shock MIL-STD-202, Method 107, Condition B, Except High Temp +115°C																																																																																													
Insertion Loss (dB MAX) .03√f(GHz)		Insertion (MAX Lbs) N/A		Moisture Resistance MIL-STD-202, Method 106, Except Vibration																																																																																													
RF Leakage (dB MIN) -[90-f(GHz)]		Withdrawal (MIN Oz) N/A		Shall Be Omitted																																																																																													
Corona, 70,000 Ft (VRMS MIN) 190		Force to Engage and Disengage (In/Lbs MAX) 2.0		Corrosion - MIL-STD-202, Method 101, Condition B, 5% salt spray																																																																																													
Dielectric Withstanding Voltage (VRMS MIN) @ Sea Level 750		Center Contact Captivation																																																																																															
Contact Resistance (Milliohms MAX)		Axial (Lbs) N/A																																																																																															
Center Contact 2.0		Radial (In/Oz) N/A																																																																																															
Outer Contact 2.0		Cable Retention																																																																																															
Cable to Housing 0.5		Axial Force (Lbs) 30																																																																																															
RF High Potential @ Sea Level (VRMS MIN @ 5 MHz) 500		Torque (In/Oz) 16																																																																																															
I.R.(Megohms MIN) N/A		Weight (Grams) 1.0																																																																																															
		RETAINING RING		BERYLLIUM COPPER PER ASTM B 196, ALLOY C17300, CONDITION H		N/A																																																																																											
		GASKET		SILICONE RUBBER PER ZZ-R-765		N/A																																																																																											
		COMPONENT		MATERIAL		FINISH																																																																																											
		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCE ON		DRAWN BY PSM DATE 7/11/68		AMP Incorporated 140 Fourth Avenue Waltham, MA 02451-7599																																																																																											
		FRAC. DEC. ANGLES		CHECKED BY PRB 7/11/68																																																																																													
		± 1/64 ± .005 ± 1°		APPD BY 7/11/68																																																																																													
		These drawings and specifications are the property of Omni Spectra Incorporated and shall not be reproduced or copied or used in whole or in part as the basis for the manufacture or sale of item(s) without written permission.		USE ASS'Y PROCEDURE		TITLE OSSM STRAIGHT CABLE PLUG - DIRECT SOLDER ATTACHMENT																																																																																											
				NO. AP. 10-001 (408-04796)		SIZE B CODE IDENT NO. 26805 1001-7985-00 REV 02 ₃																																																																																											
				SCALE 10 : 1		SHEET 1 OF 1																																																																																											

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1045369-1](#)