SAFETY ORGANIZATIONS

THIS FILTER HAS BEEN FORMALLY RECOGNIZED, CERTIFIED OR APPROVED BY THE LISTED AGENCY. THEREFORE, ALL TEST/REQUIREMENTS SPECIFIED IN THE LATEST REVISION OF THE FOLLOWING AGENCY STANDARDS HAVE BEEN MET:

RECOGNIZED: UL 1283

LSA CERTIFIED: CSA 22.2, # 0,0.4,8

VDE APPROVED: EN 133 200

OPERATING SPECIFICATIONS

LINÉ CURRENT/VOLTAGE: 12 AMP, 120/250 VAC, 12 AMP/40°C, 250 VAC

LINE FREQUENCY:

50-60Hz

MAXIMUM LEAKAGE CURRENT,

EACH LINE TO GROUND:

0.25 mA@120V 60Hz

0.40 mA@250V 50Hz

OPERATING AMBIENT TEMP. RANGE: -10°C TO +40°C @ RATED CURRENT, In.

IN AN AMBIENT, $T_{\rm O}$, HIGHER THAN 40°C, THE MAXIMUM OPERATING

CURRENT, In. IS AS FOLLOWS:

85 - T_o $I_0 = I_r -$ 45

RELIABILITY SPECIFICATIONS

STORAGE TEMPERATURE: ~40°C TO +85°C HUMIDITY: 21 DAYS @ 40°C 95% RH. CURRENT OVERLOAD TEST: 6 TIMES In FOR

8 ZECONDS

TEST SPECIFICATIONS:

INDUCTANCE: 7.88 mH NOMINAL

CAPACITANCE: (MEASURED @ 1KHz, 0.250VAC MAX., 25°C±1°C)

LINE TO GROUND: LINE TO LINE:

0.0056 µF±20% 2.0014 µF ±20% CATALOG # 12EP1

APPRVD. PJO

19MAY05

DISCHARGE RESISTOR:

0.165MA

L/G AND L/L I.R NO DISCHARGE RESISTOR:

6000M△ (MIN.) @ 100VDC,


20°C AND 50% RH


RECOMMENDED RECEIVING INSPECTION HIPOT:


LINE TO GROUND: 1500 VAC FOR 1 MINUTE LINE TO LINE: 1450 VDC FOR 1 MINUTE


FILTER APPROVAL:

THE BEST WAY TO SELECT AND QUALIFY A FILTER IS FOR YOUR ENGINEERING TO TEST THE UNIT IN YOUR EQUIPMENT.



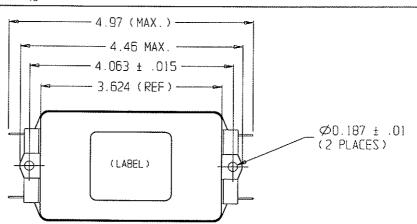

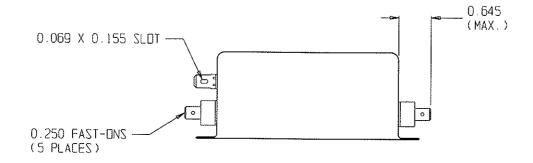



RESISTOR LOCATION OPTIONAL

| 50 | 50~- 50~(MINIMUM) INSERTION LOSS | | | | | | | | | | |
|-------------|----------------------------------|------|------|------|----|----|----|----|----|----|--|
| ENCY Z | .01 | . 04 | . 05 | . 15 | .5 | 1 | 5 | 10 | 20 | 30 | |
| GBWDN | 12 | 9 | 7 | 52 | 68 | 70 | 70 | 70 | 70 | 45 | |
| DIFF. dB | 11 | 20 | 7 | 43 | 70 | 70 | 70 | 65 | 45 | 45 | |

THIRD ANGLE PROJECTION



UNLESS OTHERWISE SPECIFIED. TOLERANCE TO BE ±.025 MATERIAL & FINISH: AS SUPPLIED

This document is proprietory to COREOM INC and is not to be reproduced nor used for nonufocturing purposes except on CORCOM'S prior written consent.



POWER LINE FILTER

| 1 | CAO FILE: G: | /CO/12EP101 | TYCO: 2-6609037-6 | | | |
|-----|--------------|---------------|-------------------|------|--|--|
| - 1 | SCALE: NTS | DATE: | EATALOG NO. | REV. | | |
| | | 250CT04 | 10004 | 1 | | |
| | DRW. BY: | ייים ייינואטן | 14EPI | l | | |
| | 1.00 | 1 100 | | L | | |

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

<u>TE Connectivity</u>: 2-6609037-6