

## NOTES:


С


В

А

- 1. TESTED FOR CONTINUITY, SHORTS AND OPENS, HI-POT 630V FOR 10MS.
- 2. CABLE ASSEMBLY MEETS USB 2.0 STANDARDS.
- 3. EXPOSED CABLE BRAID IS NOT PERMISSIBLE BEYOND OVERMOLD.
- 4. THE FINAL CABLE ASSEMBLY MAXIMUM LENGTH NOT TO EXCEED 5000MM PER USB SPECIFICATIONS.
- 5. MEETS REQUIREMENTS OF EU DIRECTIVE 2002/95/EC

PIN ASSIGNMENT :

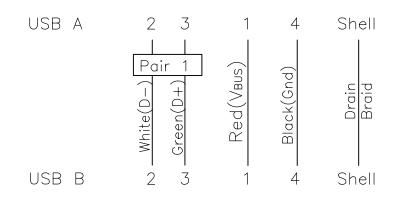





	2			1		
	LOC DIS					
	GP 0	))   P	LTR	DESCRIPTION DATE DV	IN APVD	
			С	REVISE PER ECO-05-006320 01AUG05 T	N JH	
		64		Pos.2 Pos.2 Pos.3 Pos.4		
\$ {						
	— (25) — <b>—</b> F <del>yco p/n</del> F/d yyww De in china			PART NO. 1487590-1 1487590-2		
1	LABEL		V	LENGTH(L) 4000 5000		
	AR	AR	MR	COPPER FOIL, W: 5MM	6	
	1	1	PC	LABEL, 25x35mm, White 25x13mm	5	
	AR	AR	KG	Overmold PVC, 40P, Color: White(WH01)	4	
	AR	AR	MR	USB 2.0 Cable 25AWG*1P+20AWG*2C+Al/Mylar +Drain+Braid, Color: White(WH01).	- 3	
	1	1	EA	USB 4Pin Connector Contacts: Gold 30U Plated Shell: Nickel Plated, Housing UL94V-0 B Type.	<del>,</del> 2	
	1	1	EA	USB 4Pin Connector Contacts: Gold 30U Plated Shell: Nickel Plated, Housing UL94V-0 A Type.	, 1	
	-2	-1	U/M	DESCRIPTION	ITEM	
HIS DRAWING IS A CONTROLLE	D DOCUMENT.	BOVEY LI	2: U	FEB/02   Type   Type   Type     -		
mm 0 PLC 1 PLC 2 PLC 3 PLC 4 PLC ANGLES	± - PRC   ± - +   ± - +   ± - +   ± - +   ± - +	F.D. McC oduct spec — PLICATION S —	<u>ORKEL</u>	MAR/02 NAME CABLE ASSEMBLY, USB A TYPE TO USB B T 	YPE	
ATERIAL FINISH		IGHT	—	A 3 00779 C= 1487590		
		JSTOME		VING SCALE NT C SHEET 1 OF 1	REV	

## **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TE Connectivity: <u>1487590-1</u>