
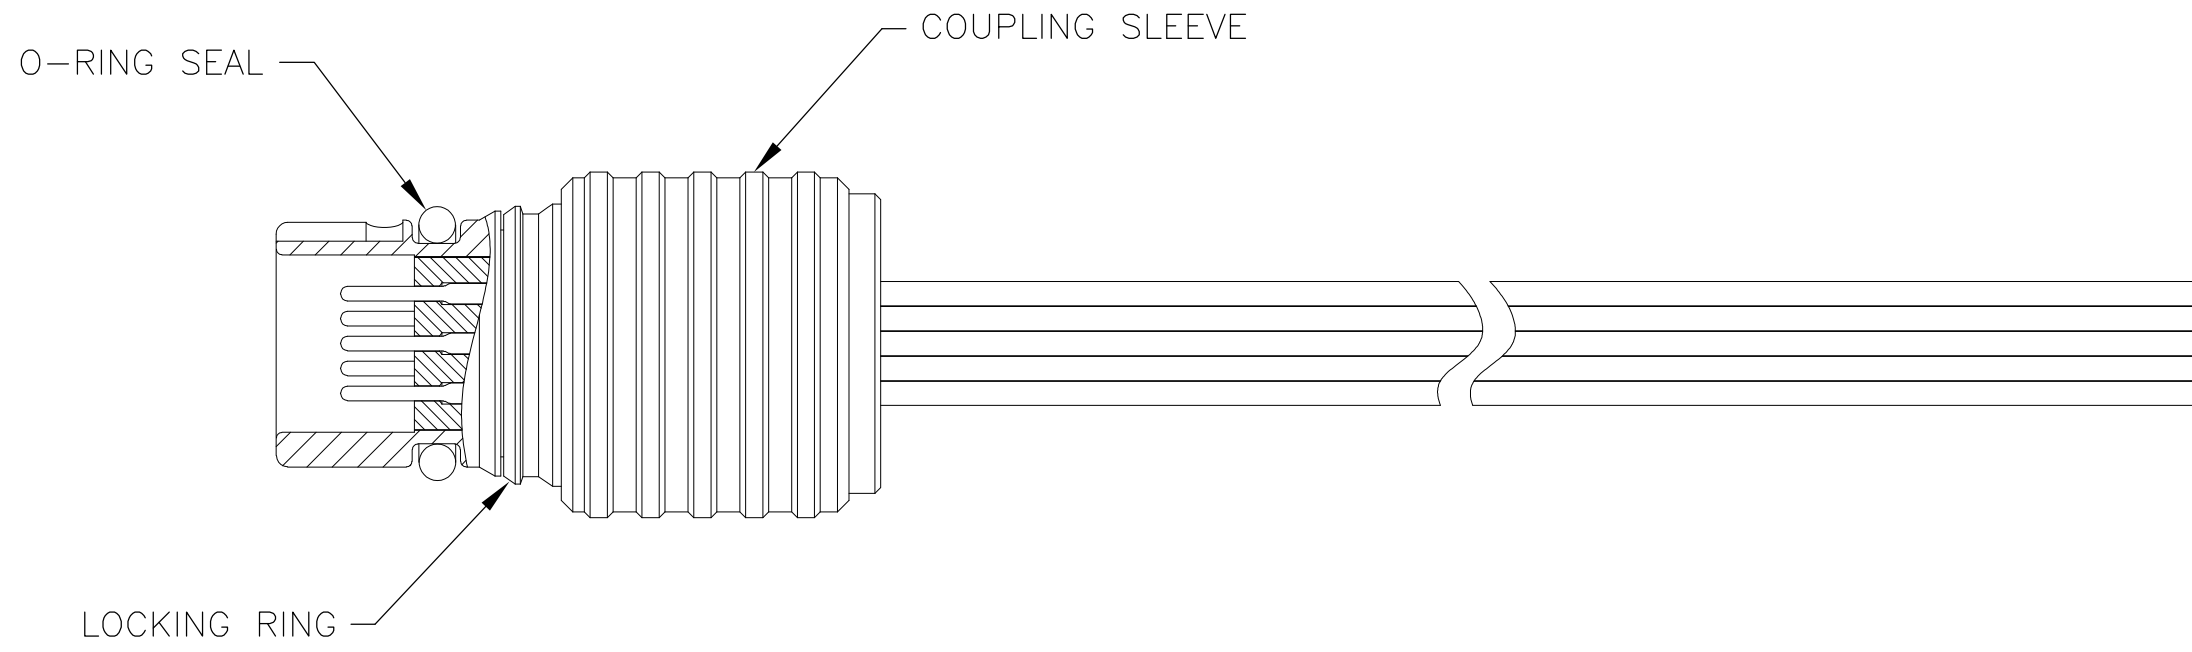
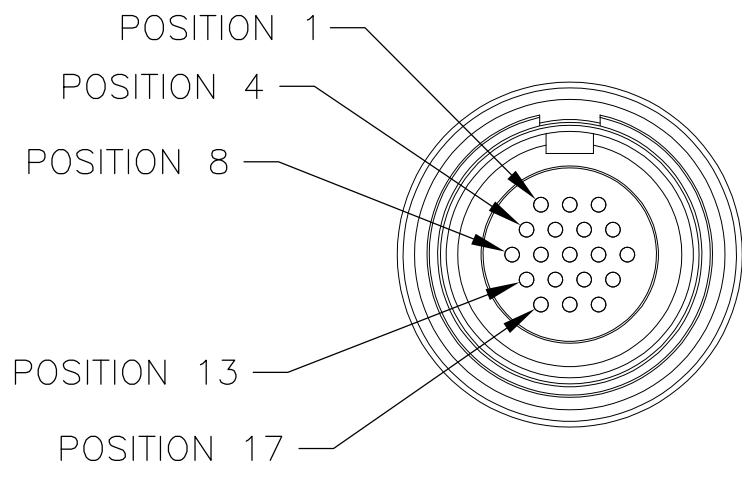
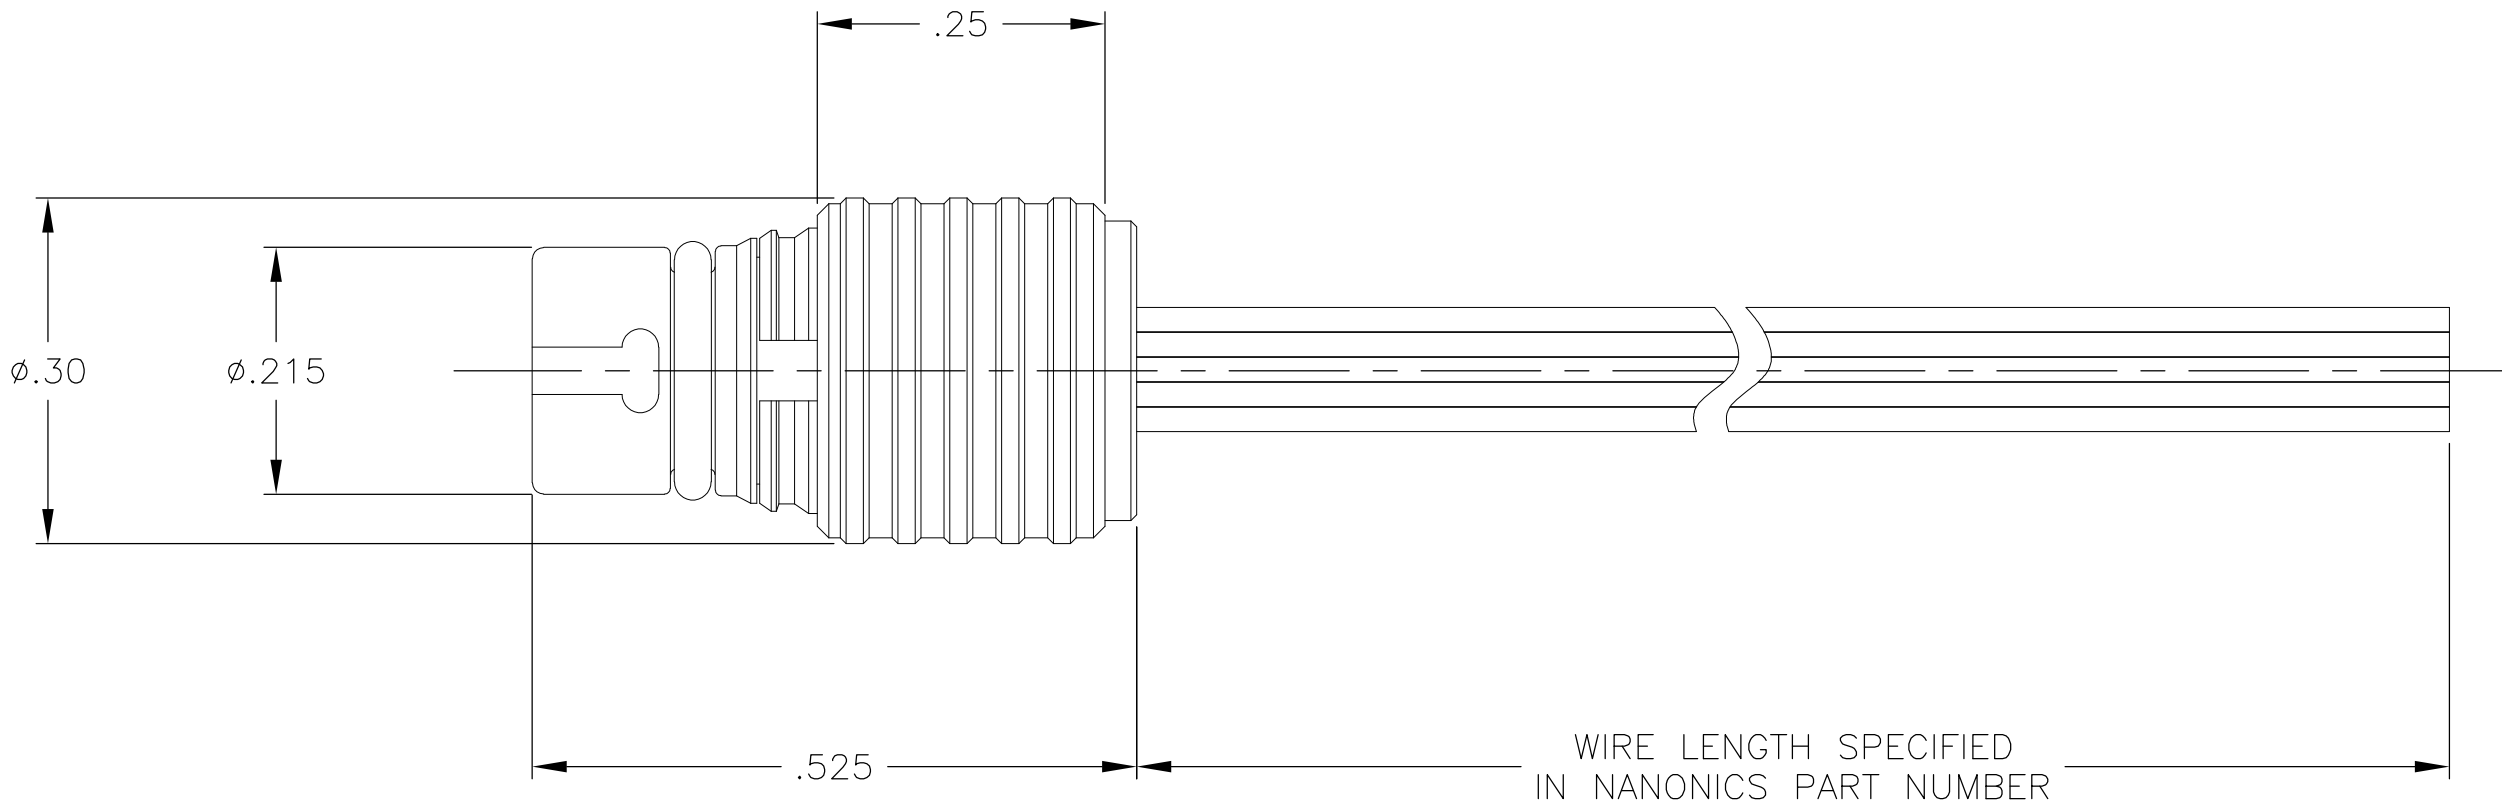


LOC —	DIST —	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
			G	UPDATE PER ECO-11-013056	23 JUN 11	CAS	MKS

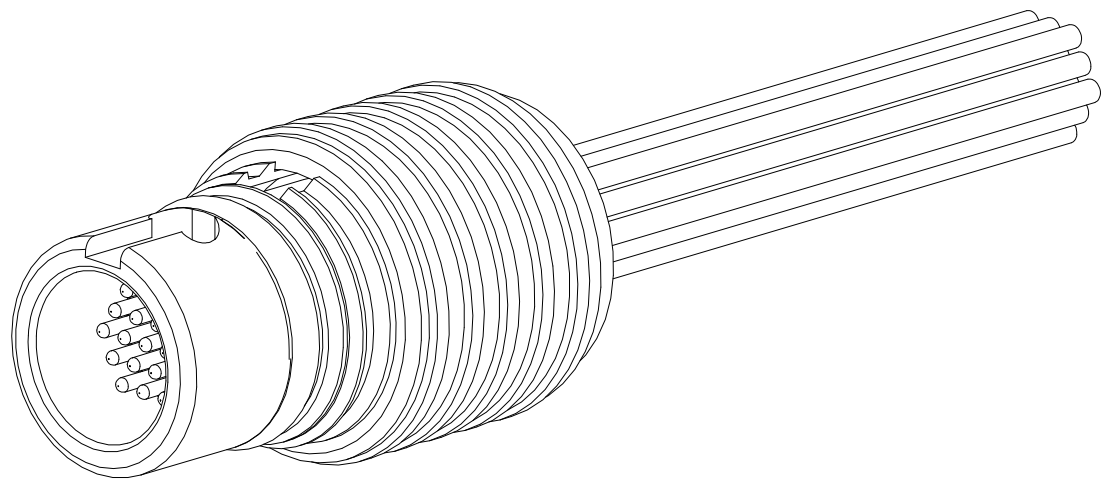

1 CONNECTOR BODY AND COUPLING SLEEVE MATERIAL: 6061-T6 ALUMINUM, ELECTROLESS NICKEL PLATED PER SAE-AMS-C-26074 OR SAE-AMS-2404E
LOCKING RING MATERIAL: BERYLLIUM COPPER, ELECTROLESS NICKEL PLATED PER SAE-AMS-C-26074 OR SAE-AMS-2404E
INSULATOR MATERIAL: LIQUID CRYSTAL POLYMER (LCP) PER ASTM D5138 OR POLYPHENYLENE SULFIDE (PPS) PER ASTM D4067
O-RING MATERIAL: FLUOROSILICONE

2 WIRE TERMINATION: 28 AWG SOLID, 30 AWG STRANDED WIRE OR SMALLER

3 LUBRICATE O-RING WITH PARKER SUPER-O-LUBE PRIOR TO INSTALLATION

4 THIS DRAWING ALSO IDENTIFIED AS NANONICS 303-0025

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M. STORRY 8 APR 99	TE Connectivity	
DIMENSIONS: INCHES		CHK E. PAULUS 8 APR 99		
	TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
	0 PLC ± -		APVD S. KAIN 26 JAN 00	
	1 PLC ± -		PRODUCT SPEC	
	2 PLC ± .010		APPLICATION SPEC	
3 PLC ± .005		—		
4 PLC ± -		WEIGHT		
ANGLES ± 1°		—		
FINISH		SCALE		
SEE NOTES		6:1		

MATERIAL		CAGE CODE		DRAWING NO		RESTRICTED TO	
SEE NOTES		A20PJN9		C=1589057		—	
CUSTOMER DRAWING				SHEET		REV	
				1 of 1		G	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-1589057-9](#)