
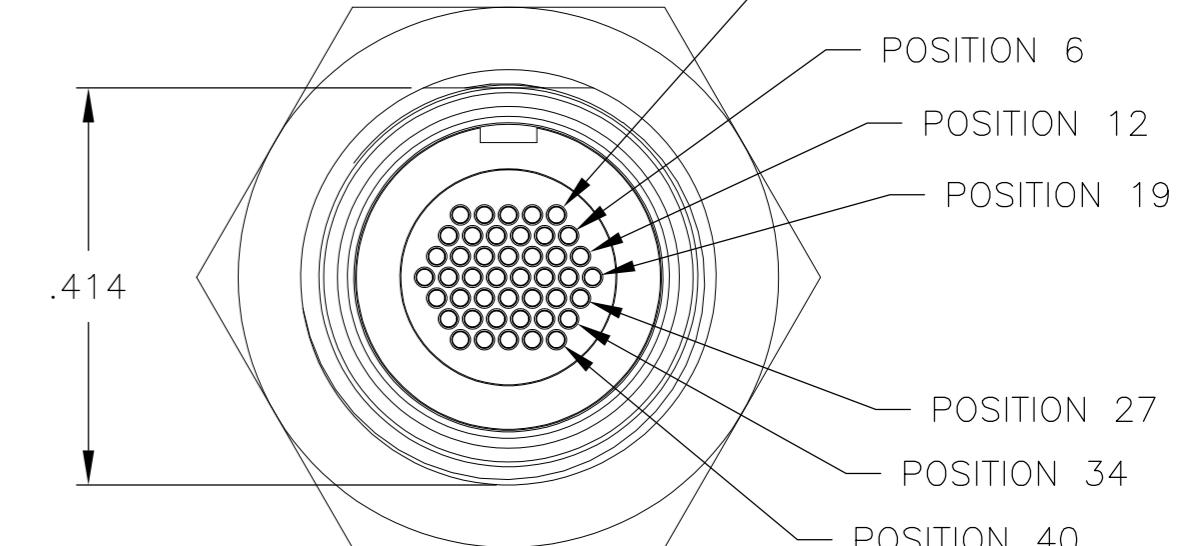
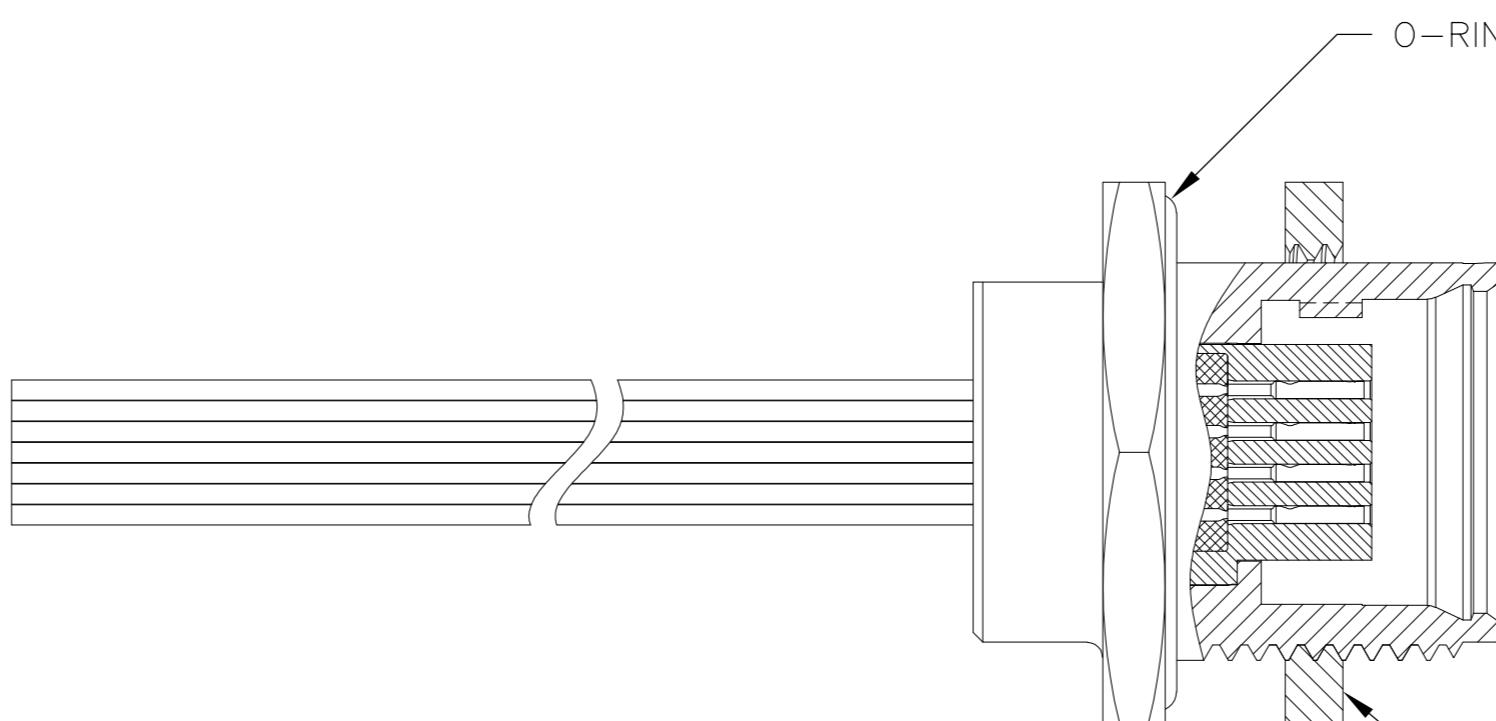
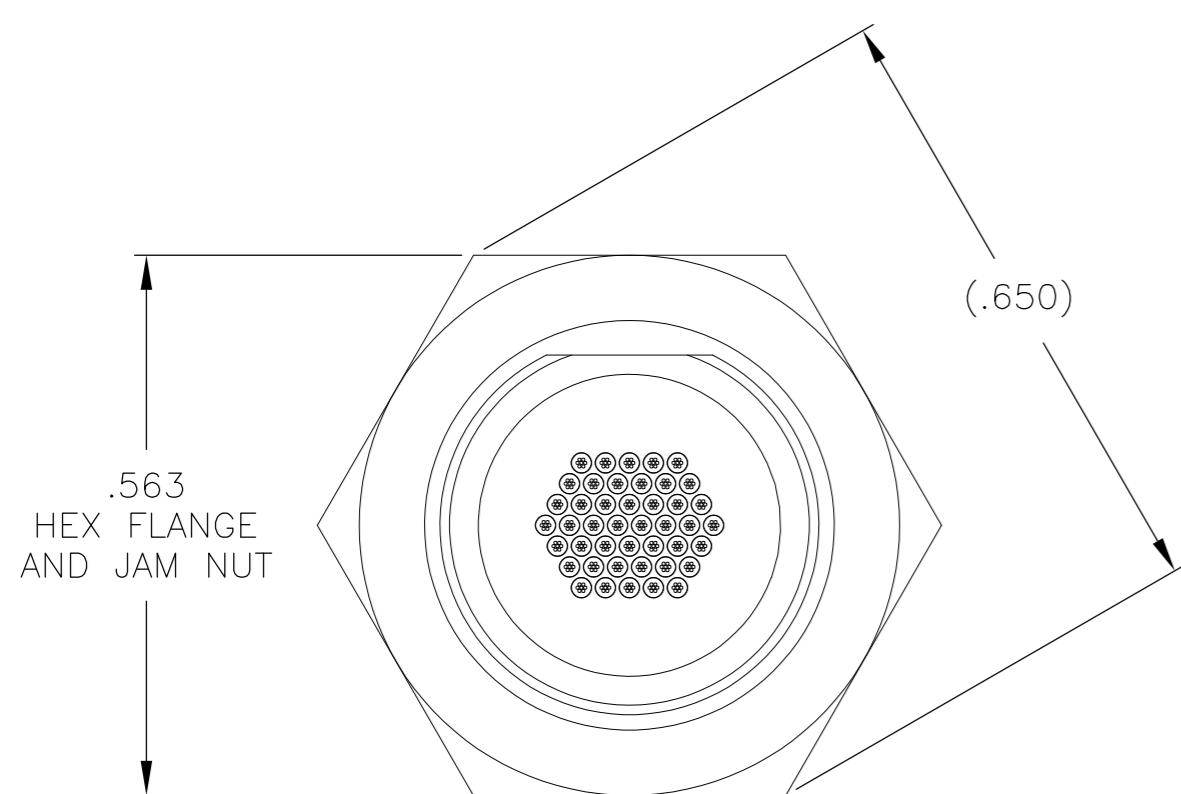
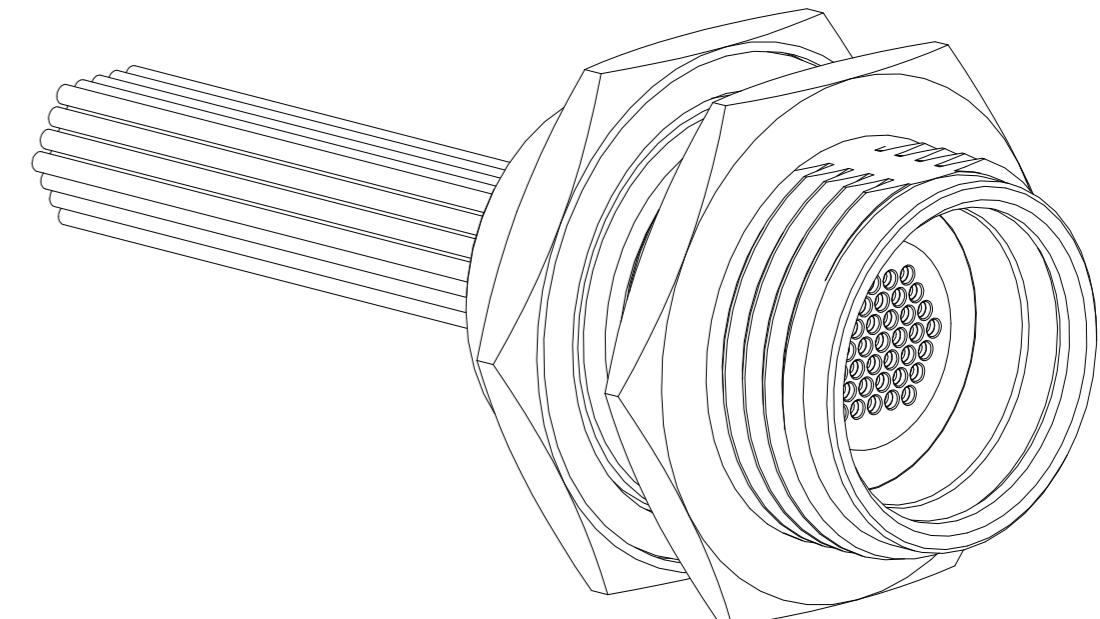
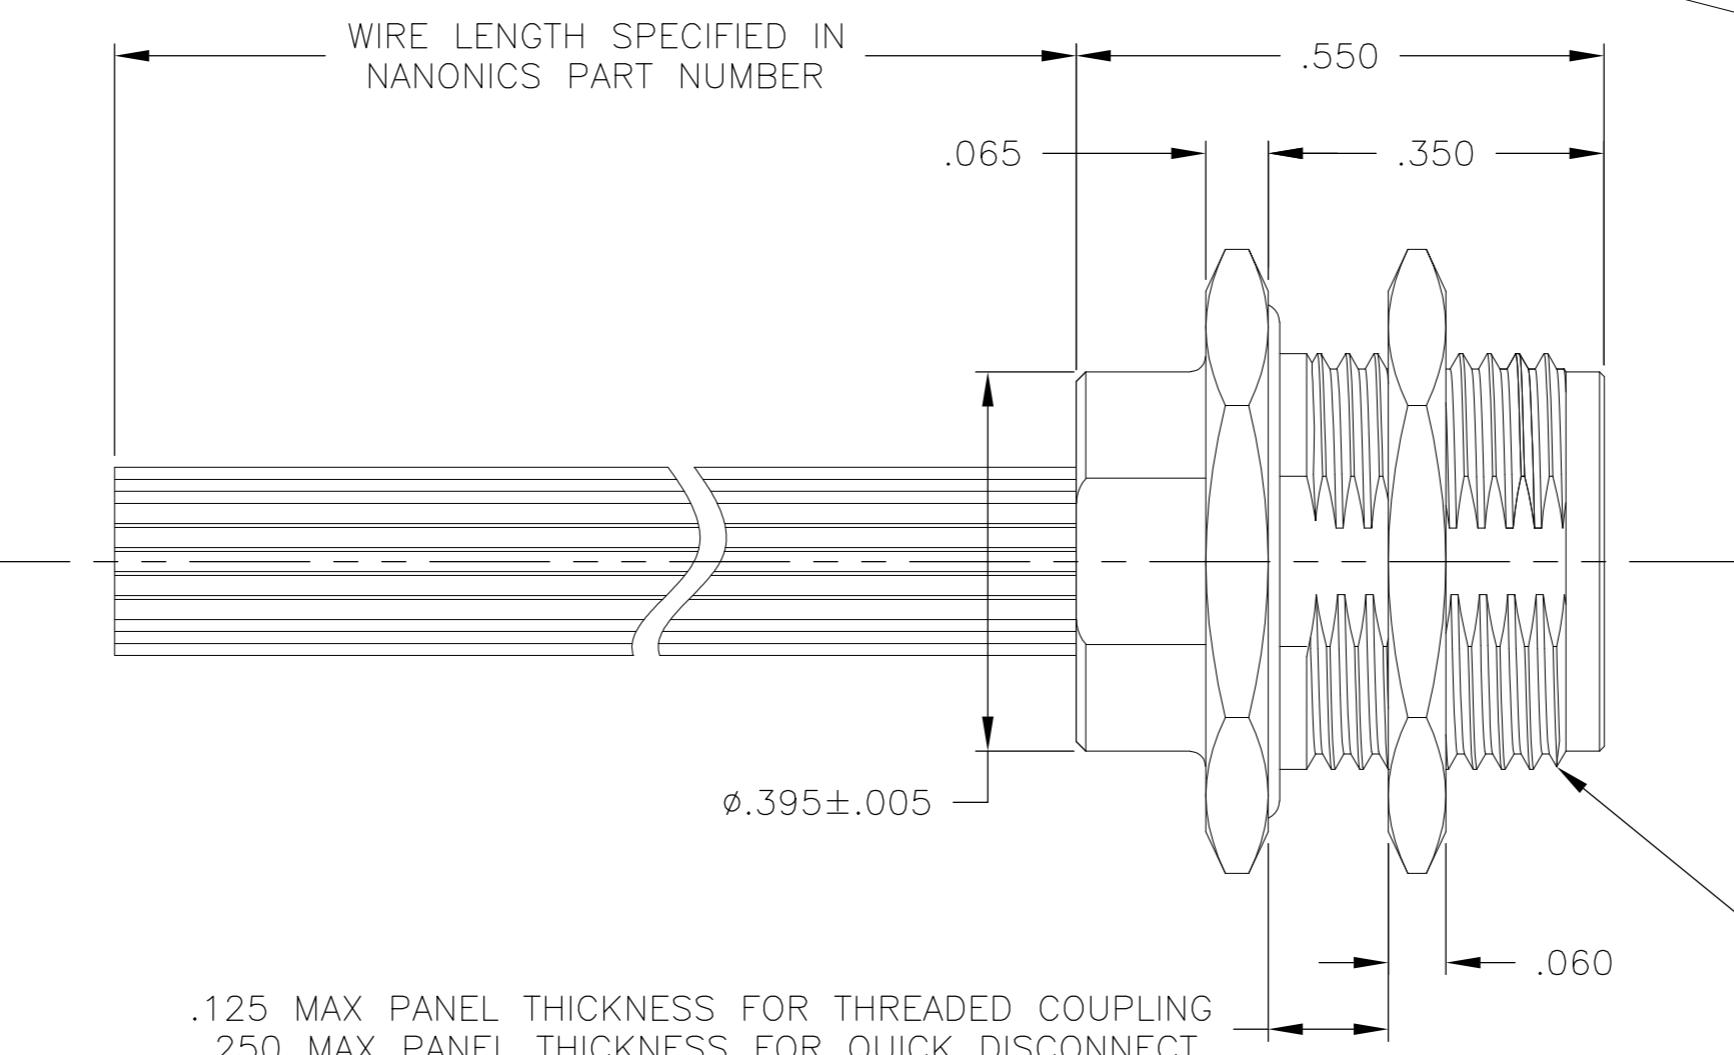


THIS DRAWING IS UNPUBLISHED.	RELEASED FOR PUBLICATION	ALL RIGHTS RESERVED.
© COPYRIGHT -	By -	

LOC	DIST	REVISIONS			
		P	LTR	DESCRIPTION	
	H			UPDATE PER ECO-11-013056	23 JUN 11 CAS MKS

SUGGESTED PANEL CUT-OUT

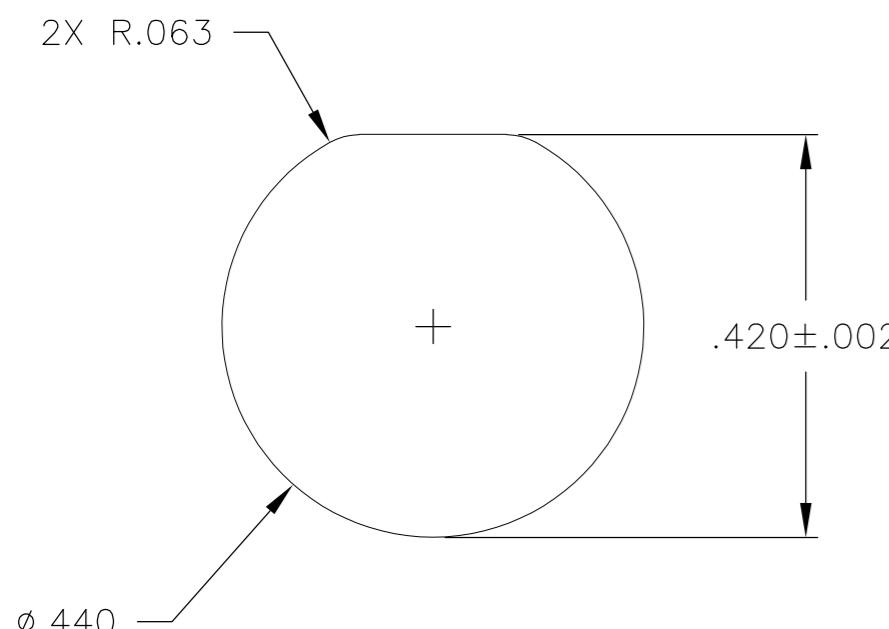

1 CONNECTOR BODY AND JAM NUT MATERIAL: 6061-T6 ALUMINUM, ELECTROLESS NICKEL PLATED PER SAE-AMS-C-26074 OR SAE-AMS-2404E
LOCKING RING MATERIAL: BERYLLIUM COPPER, ELECTROLESS NICKEL PLATED PER SAE-AMS-C-26074 OR SAE-AMS-2404E
INSULATOR MATERIAL: LIQUID CRYSTAL POLYMER (LCP) PER ASTM D5138 OR POLYPHENYLENE SULFIDE (PPS) PER ASTM D4067
O-RING MATERIAL: FLUOROSILICONE

2 WIRE TERMINATION: 28 AWG SOLID, 30 AWG STRANDED WIRE OR SMALLER

3 LUBRICATE O-RING WITH PARKER SUPER-O-LUBE PRIOR TO INSTALLATION

4 THIS DRAWING PREVIOUSLY IDENTIFIED AS NANONICS 303-0031

THIS DRAWING IS A CONTROLLED DOCUMENT.	
DRAWN M. STORRY CHK E.PAULUS	23 APR 99 7 MAY 99
DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC 1 PLC 2 PLC 3 PLC 4 PLC	± - ± - ± .010 ± .005 ± 1°
MATERIAL SEE NOTES	FINISH SEE NOTES

TE Connectivity	
RECEPTACLE ASSEMBLY, CIRCULAR, PANEL MOUNT, THREADED COUPLING/ QUICK DISCONNECT, METAL, 44 POSITION	
SIZE A2	CAGE CODE OPJN9
DRAWING NO C-1589062	RESTRICTED TO
1471-9 (3/11)	SCALE 5:1
SHEET 1 OF 1	REV H

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-1589062-3](#)