
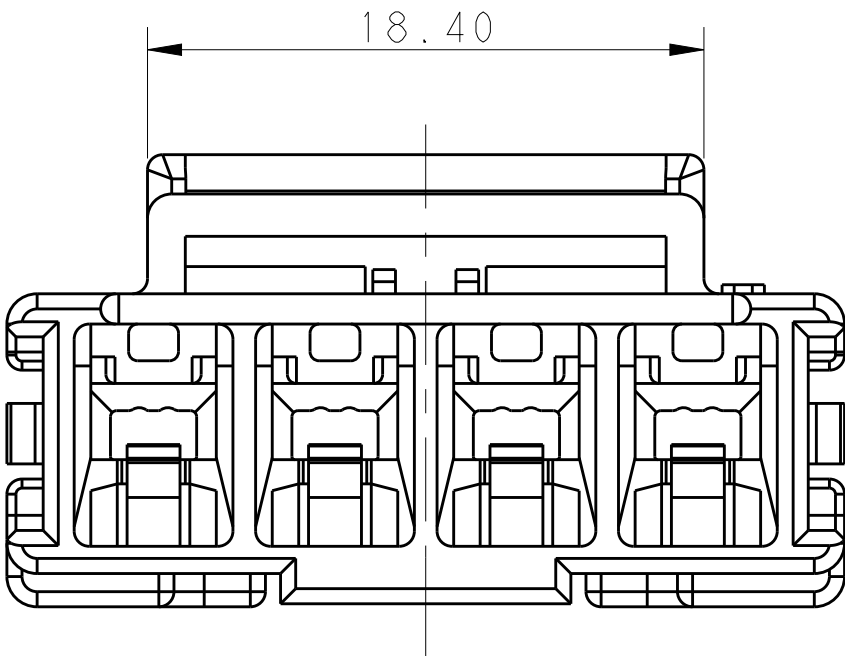
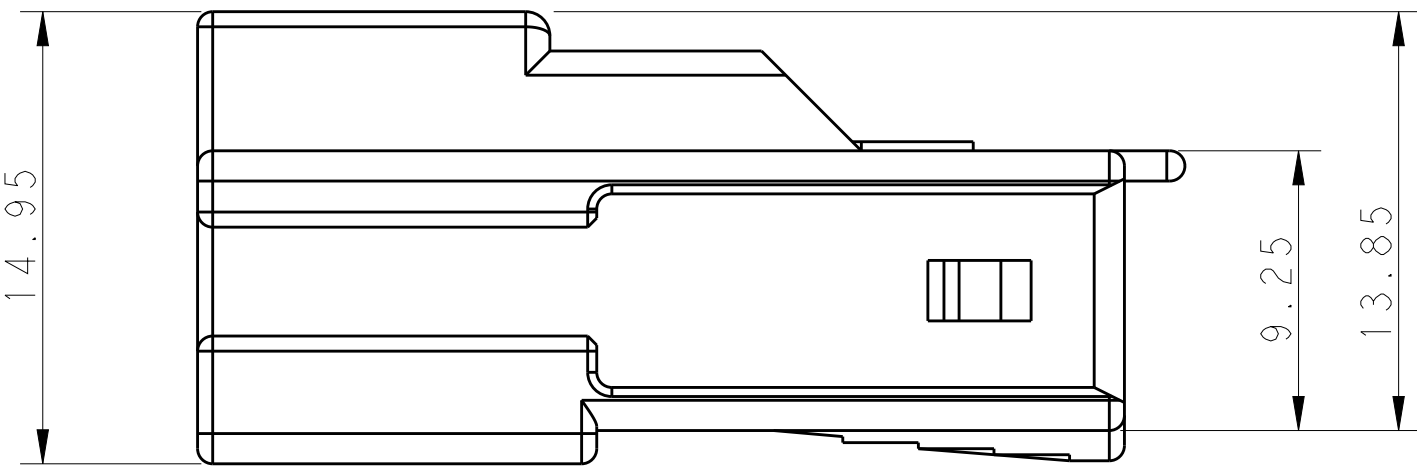
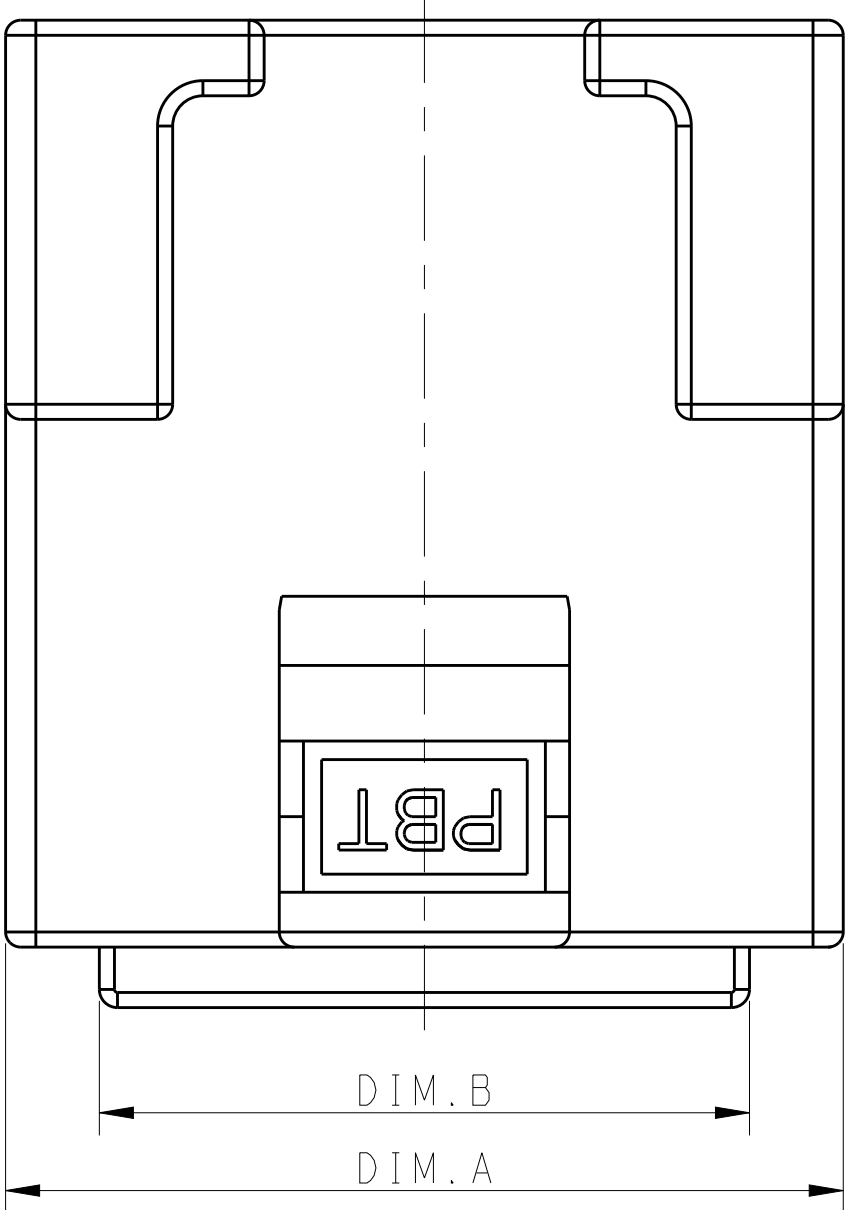
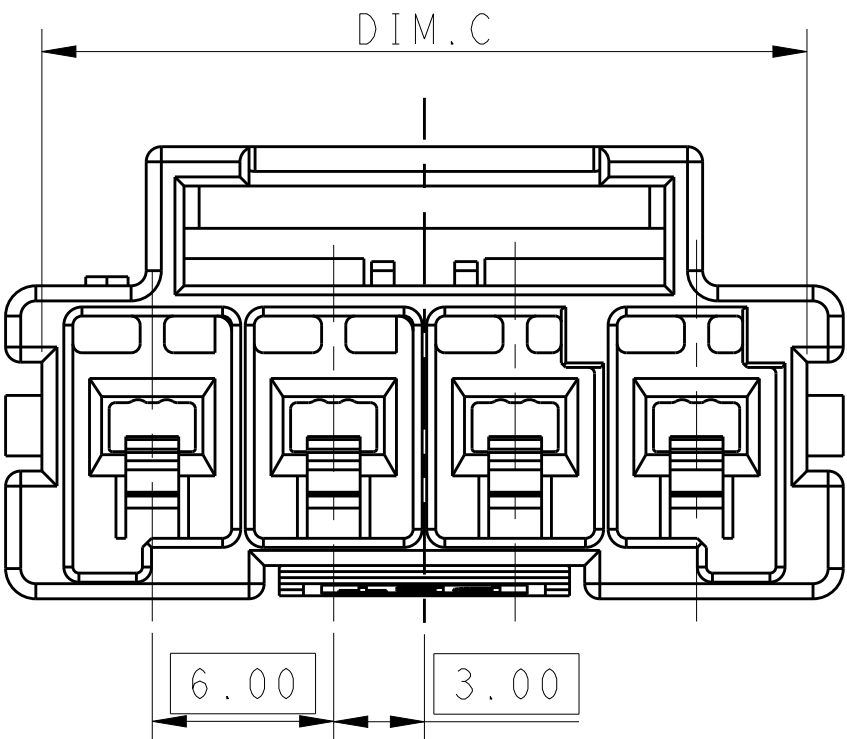



LOC		DIST		REVISIONS				
P	LTR	DESCRIPTION			DATE	DWN	APVD	
	C	REVISED PER ECR-16-003247			14JUL2016	BW	GJ	
	C1	REVISED PER ECR-18-002070			12NOV2018	BKW	GJ	

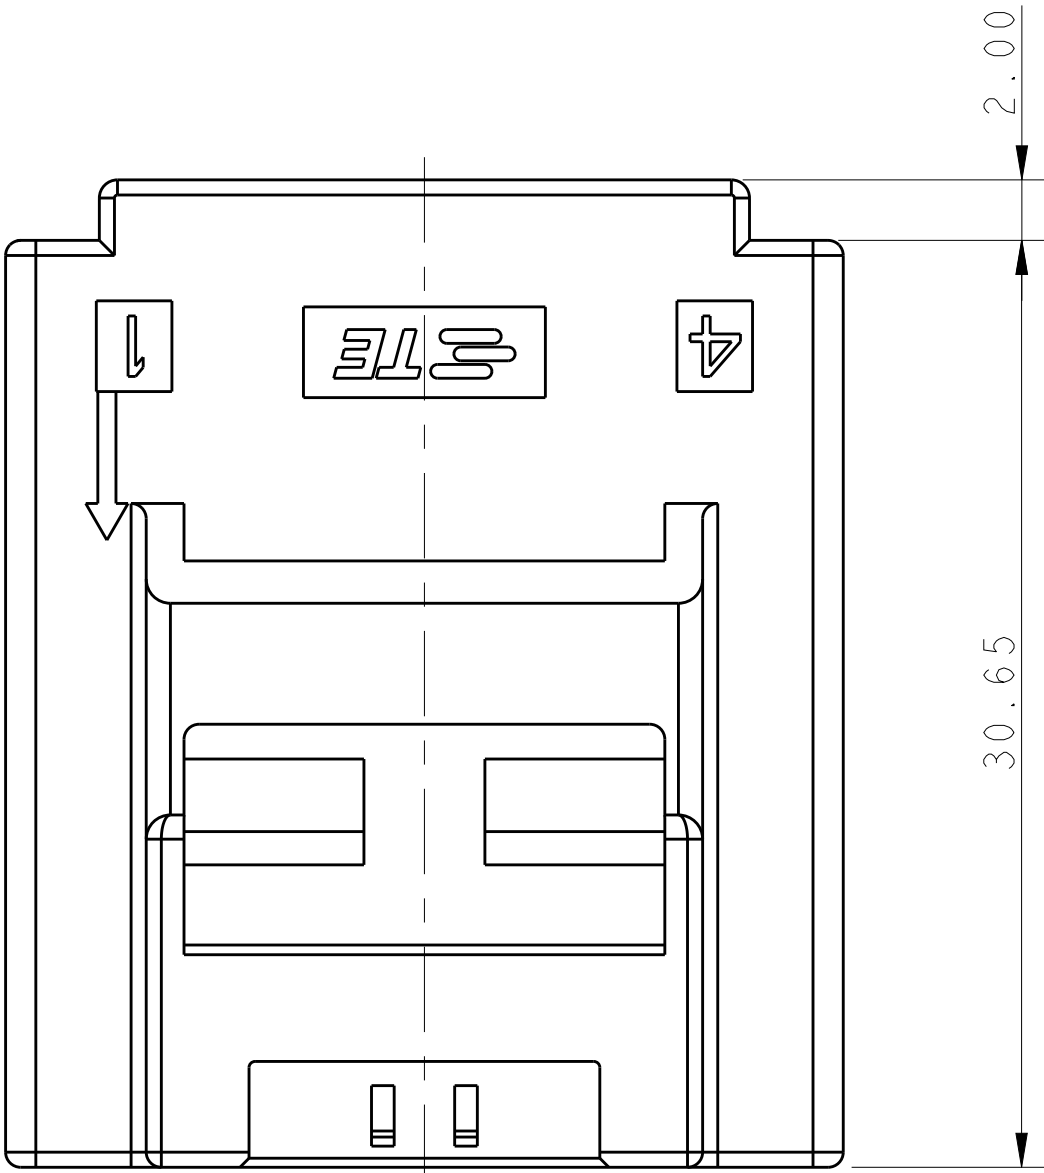









- ⚠ MATERIAL:
LEVEL 1:PBT, STANDARD TEMPERATURE 105°C.
KEY A:NATURAL; KEY B:PURPLE; KEY C:BLUE; KEY D:YELLOW
- LEVEL 2:NYLON, HIGH TEMPERATURE 150°C
KEY A:LIGHT GREY; KEY B:RED; KEY C:BLACK; KEY D:NATURAL
- 2 MATERIAL MARK:
LEVEL 1:PBT, LEVEL 2:HDT
- 3 APPLICABLE CONTACT P/N
TAB CONTACT:1971238/1971780/82/84/86/88-*,2238067-*
- 4 MATING CONN, P/N
PLUG HSG: *-1971773-
TPA (LOCK PLATE): *-1971777-*
- 5 THIS DRAWING DOES NOT PERTAIN TO RESTRICTED P/N 5-1971771-2.
- 6 THIS PRODUCT HAS NOT COMPLETED VALIDATION TESTING

SUPERSEDED BY POWER TRIPLE LOCK
PANEL MOUNT CAPS X-1971772-X



POS.	DIM.A	DIM.B	DIM.C
1*5	33.70	27.50	31.30
1*4	27.70	21.50	25.30
1*3	21.70	15.50	19.30
1*2	15.70	9.50	13.30

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN TOMMY WU 09JUL2012	 TE Connectivity	
DIMENSIONS:		CHK HAPYE WU 09JUL2012		
mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD YUHHONG MAO 09JUL2012	NAME CAP HOUSING,FREE HANGING,SINGLE ROW POWER TRIPLE LOCK
	0 PLC ± 1 PLC ±0.35 2 PLC ±0.25 3 PLC ± 4 PLC ± ANGLES ± FINISH -		PRODUCT SPEC 108-106118 APPLICATION SPEC 114-106118 WEIGHT -	SIZE A100779
MATERIAL			DRAWING NO C1971771	RESTRICTED TO -
			SCALE -	SHEET 1 OF 2

LOC		DIST		REVISIONS					
-		-		P	LTR	DESCRIPTION	DATE	DWN	APVD
				-	-	SEE SHEET 1	-	-	-

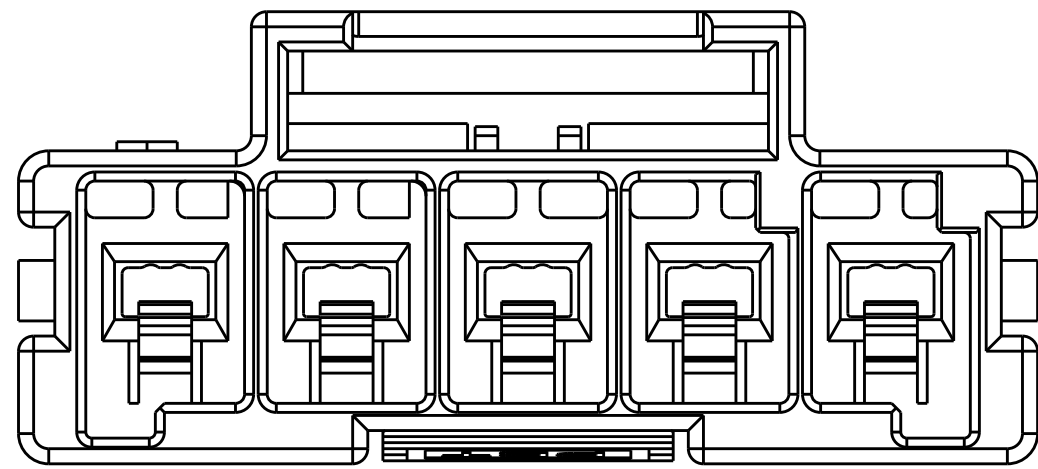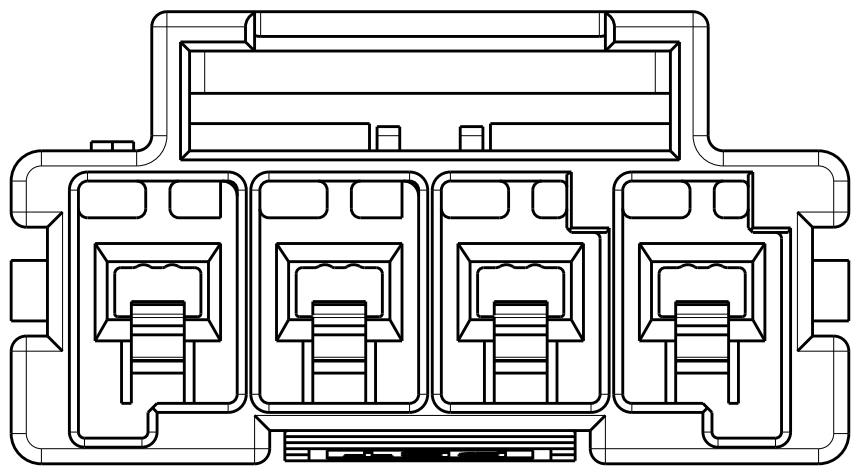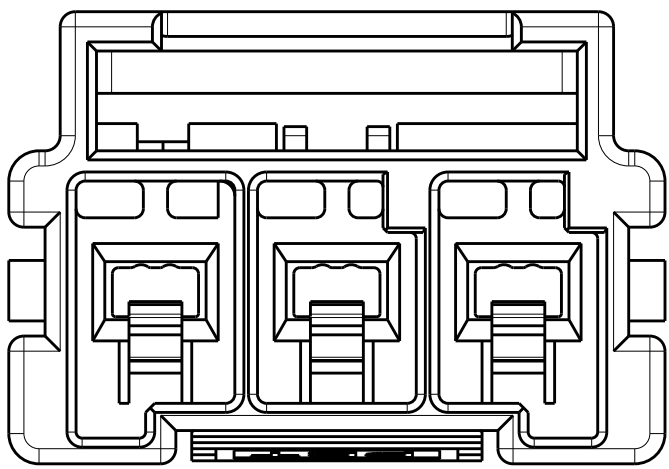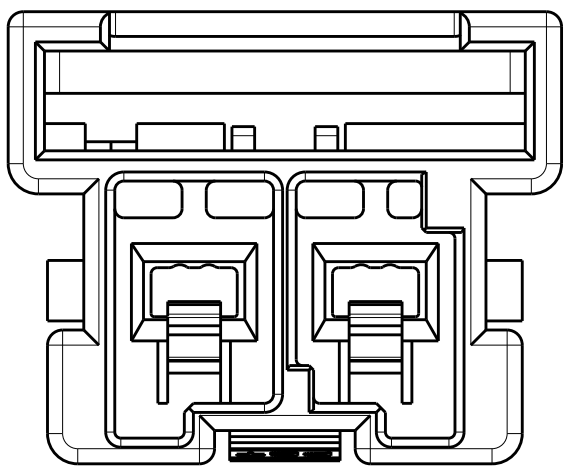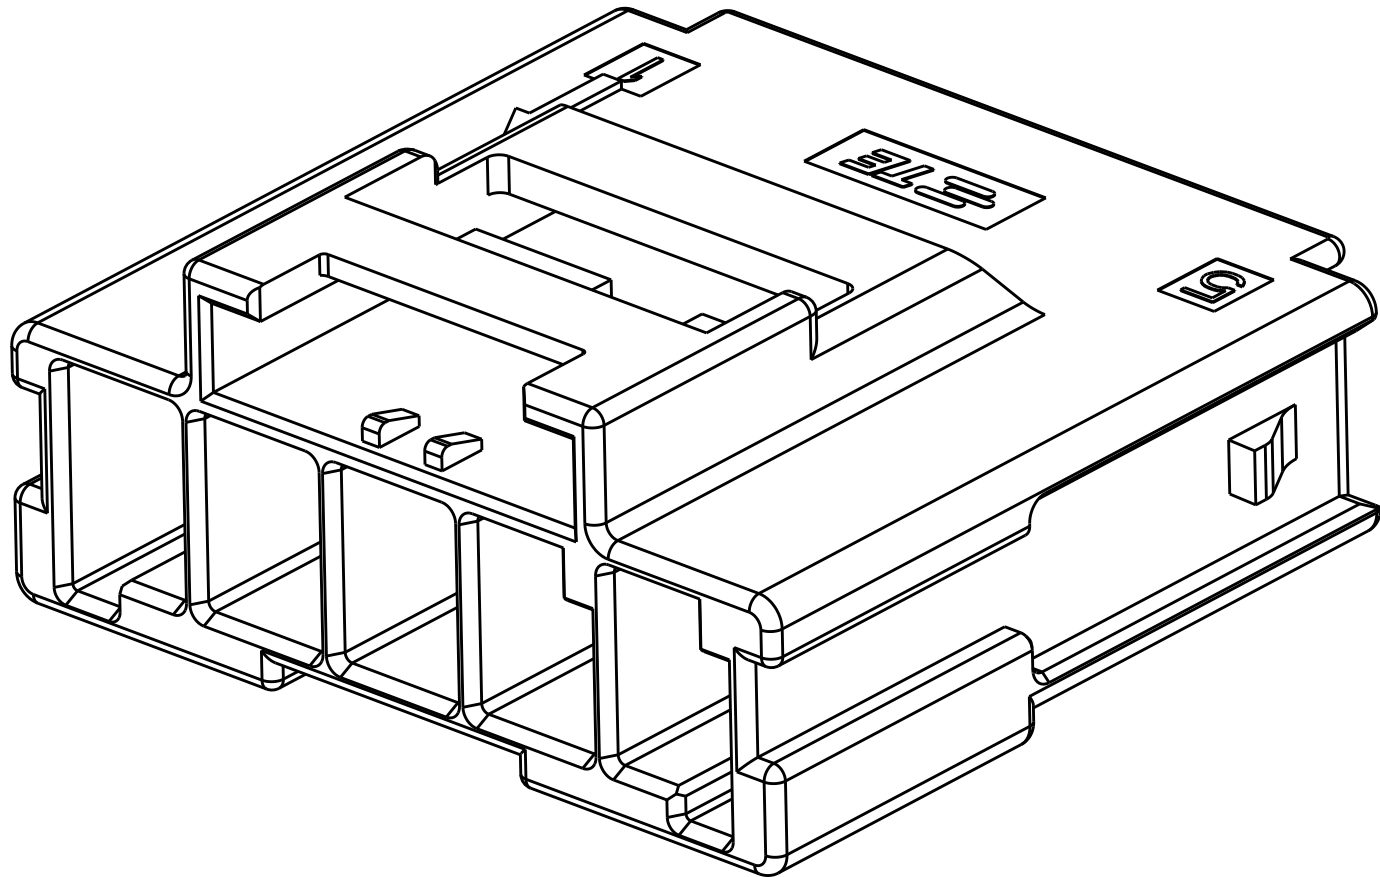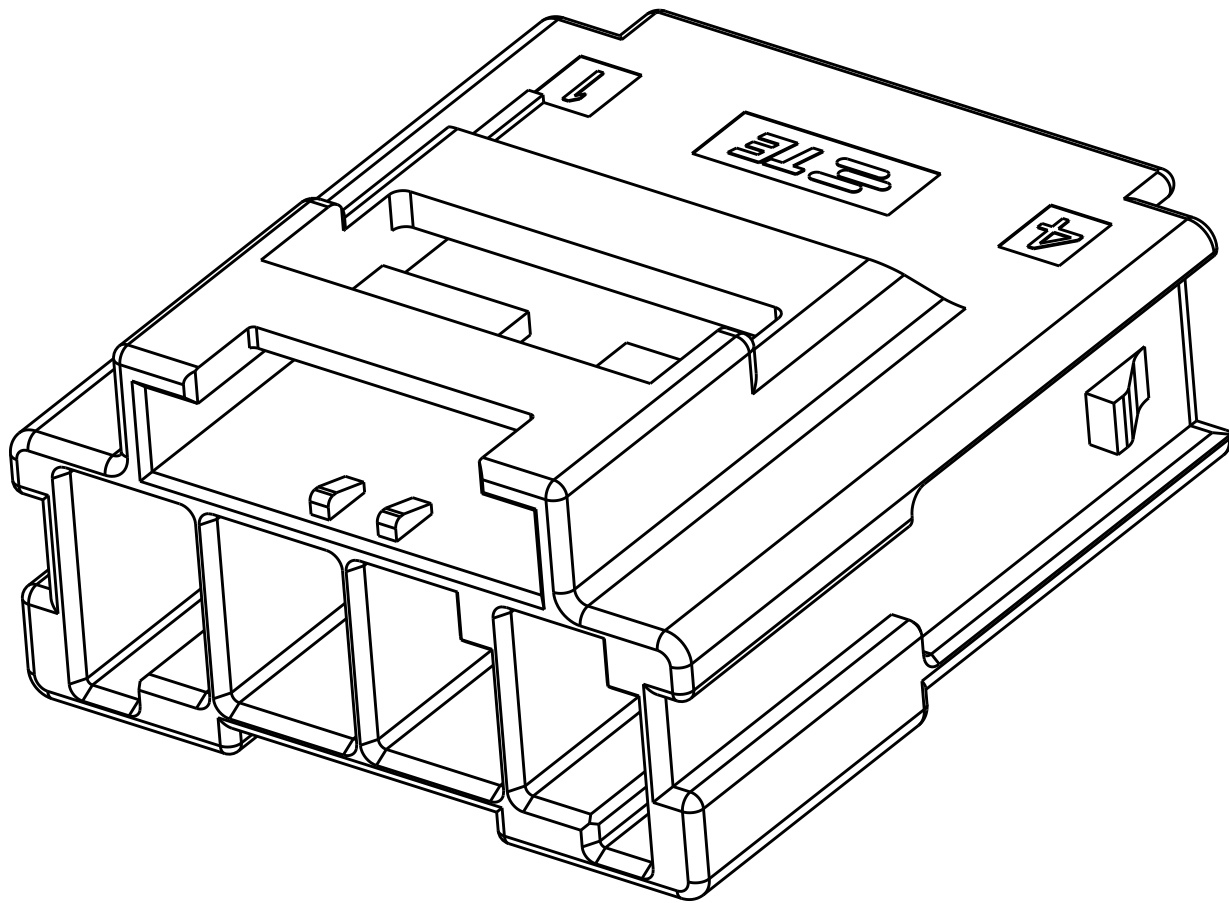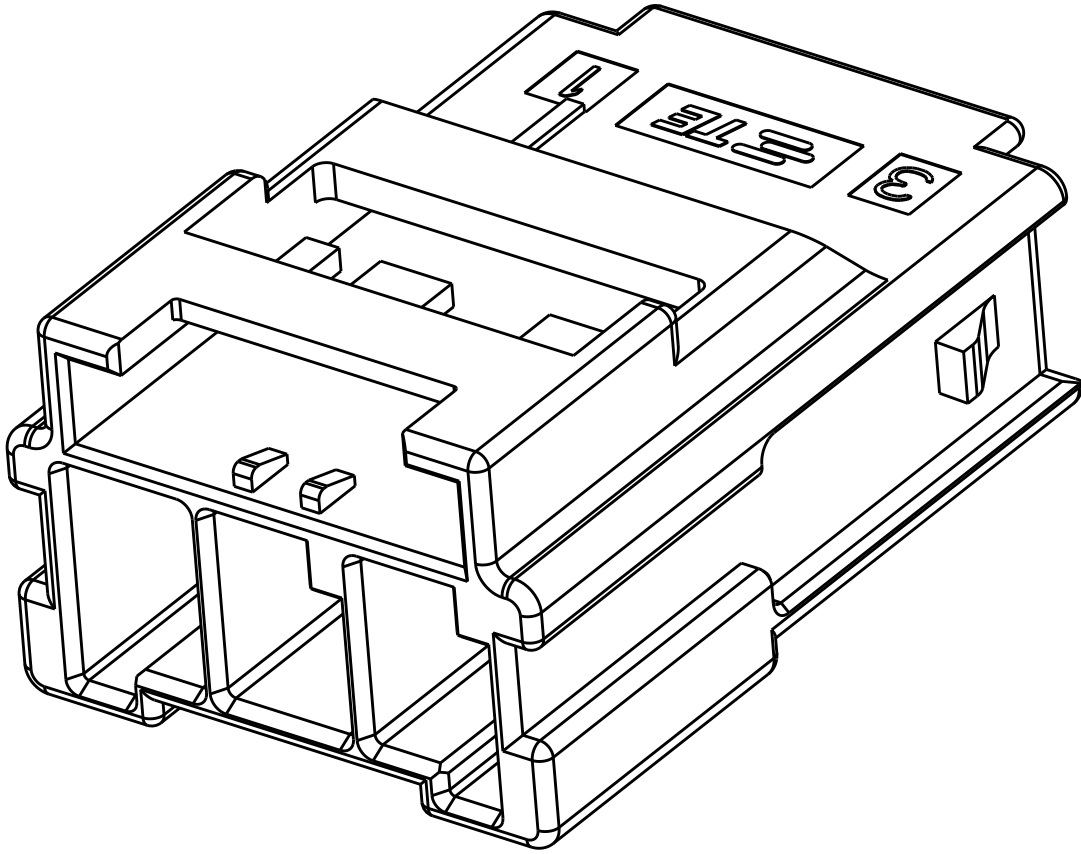
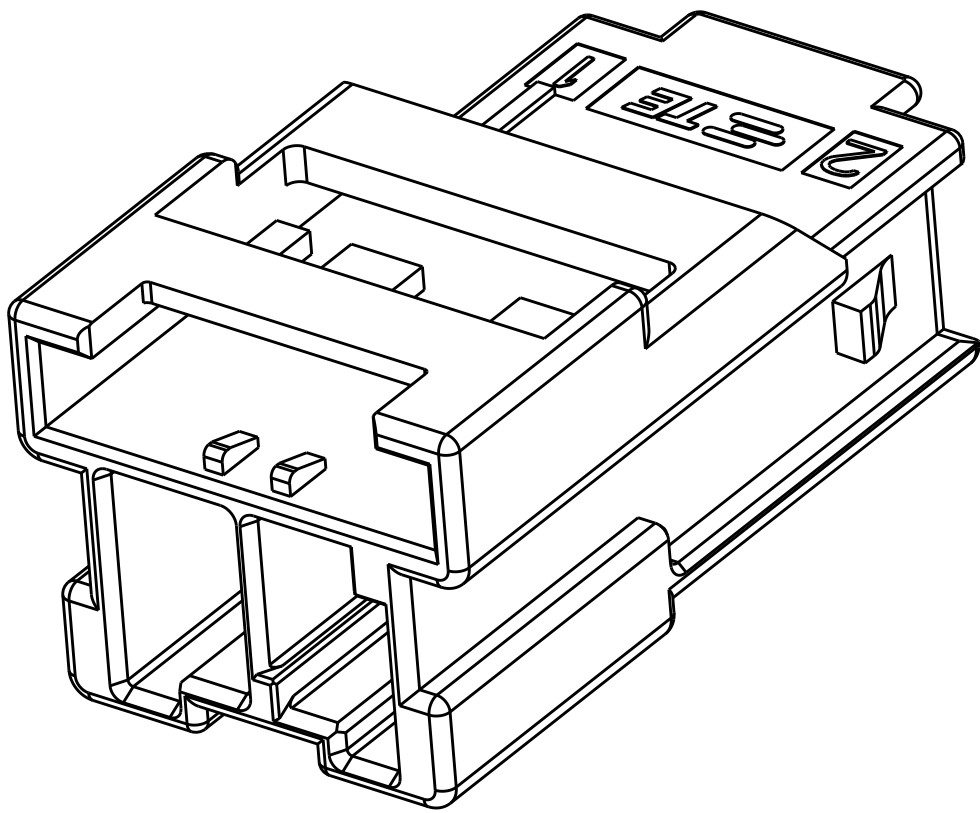


1*2 POSITIONS

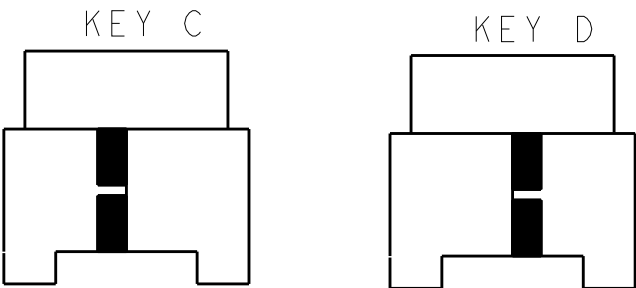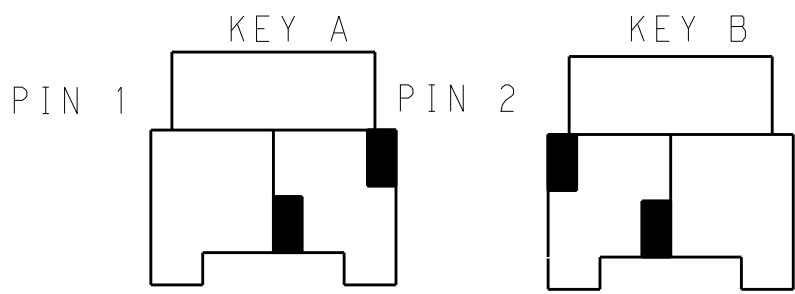



KEYING FOR 1*2 POS.

1*3 POSITIONS

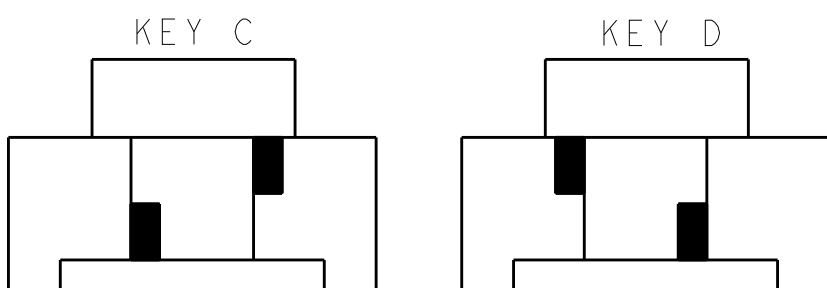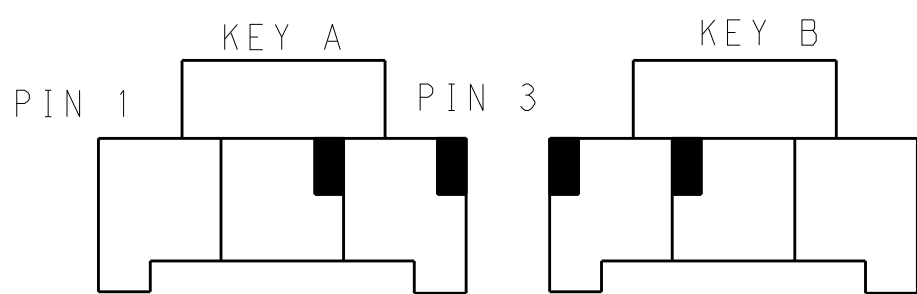



KEYING FOR 1*3 POS.

1*4 POSITIONS

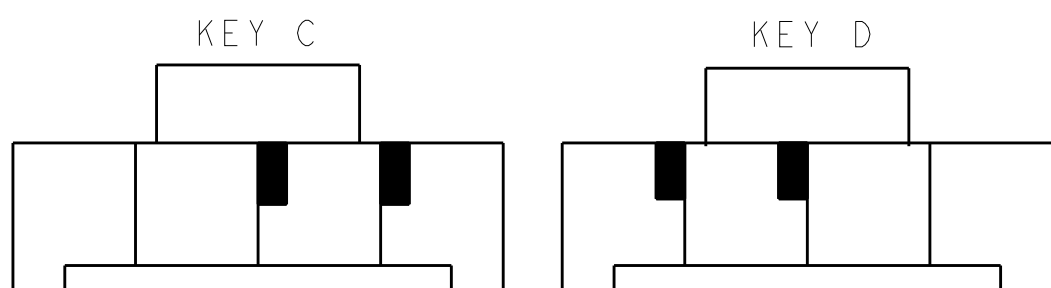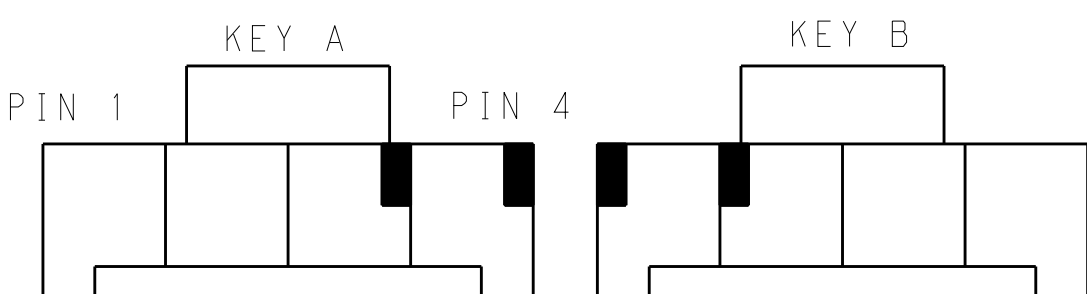

KEYING FOR 1*4 POS.

1*5 POSITIONS

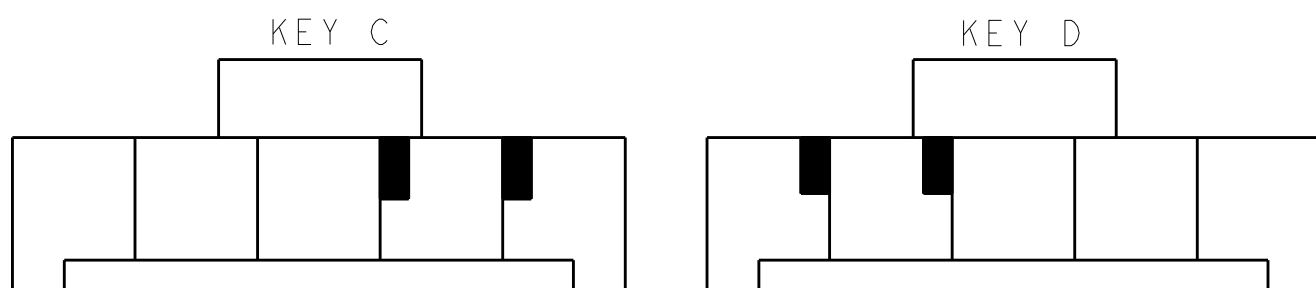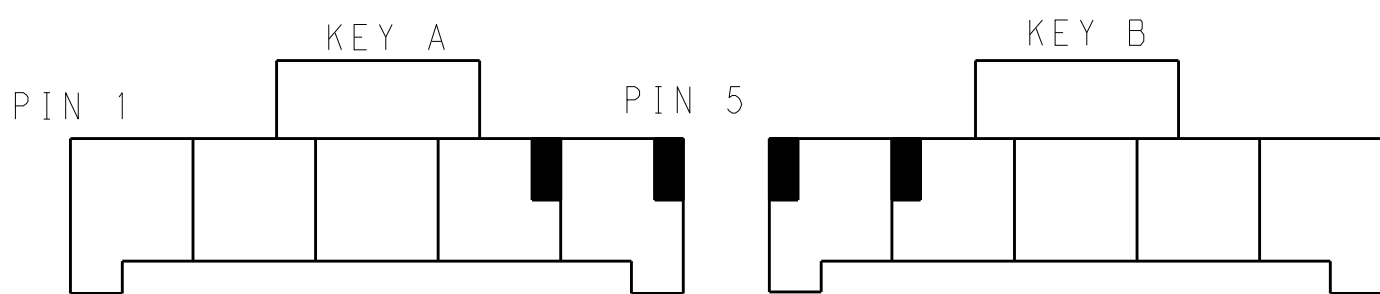

KEYING FOR 1*5 POS.

1*5	LEVEL 1	KEY A	1-1971771-7
		KEY B	2-1971771-7
		KEY C	3-1971771-7
		KEY D	4-1971771-7
	LEVEL 2	KEY A	5-1971771-7
		KEY B	6-1971771-7
		KEY C	7-1971771-7
		KEY D	8-1971771-7
1*4	LEVEL 1	KEY A	1-1971771-4
		KEY B	2-1971771-4
		KEY C	3-1971771-4
		KEY D	4-1971771-4
	LEVEL 2	KEY A	5-1971771-4
		KEY B	6-1971771-4
		KEY C	7-1971771-4
		KEY D	8-1971771-4
POS.	MATERIAL	KEY	P/N

1*3	LEVEL 1	KEY A	1-1971771-3
		KEY B	2-1971771-3
		KEY C	3-1971771-3
		KEY D	4-1971771-3
	LEVEL 2	KEY A	5-1971771-3
		KEY B	6-1971771-3
		KEY C	7-1971771-3
		KEY D	8-1971771-3
1*2	LEVEL 1	KEY A	1-1971771-2
		KEY B	2-1971771-2
		KEY C	3-1971771-2
		KEY D	4-1971771-2
	LEVEL 2	KEY A	9-1971771-2
		KEY B	6-1971771-2
		KEY C	7-1971771-2
		KEY D	8-1971771-2
POS.	MATERIAL	KEY	P/N

SUPERSEDED BY POWER TRIPLE LOCK
PANEL MOUNT CAPS X-1971772-X

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN TOMMY_WU	09JUL2012	 TE Connectivity	
		CHK HAPYE_WU	09JUL2012		
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME CAP HOUSING,FREE HANGING,SINGLE ROW POWER TRIPLE LOCK	
		0 PLC ±. 1 PLC ±0.35 2 PLC ±0.25 3 PLC ±. 4 PLC ±. ANGLES ±. FINISH -		APVD YUJHONG_MAO	
MATERIAL 		PRODUCT SPEC 108-106118		SIZE A1	
		APPLICATION SPEC 114-106118		CAGE CODE C=1971771	
		WEIGHT -		DRAWING NO 100779	
				RESTRICTED TO -	
		Customer Drawing		SCALE -	
				SHEET 2 OF 2	
		REV C1			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-1971771-4](#)