
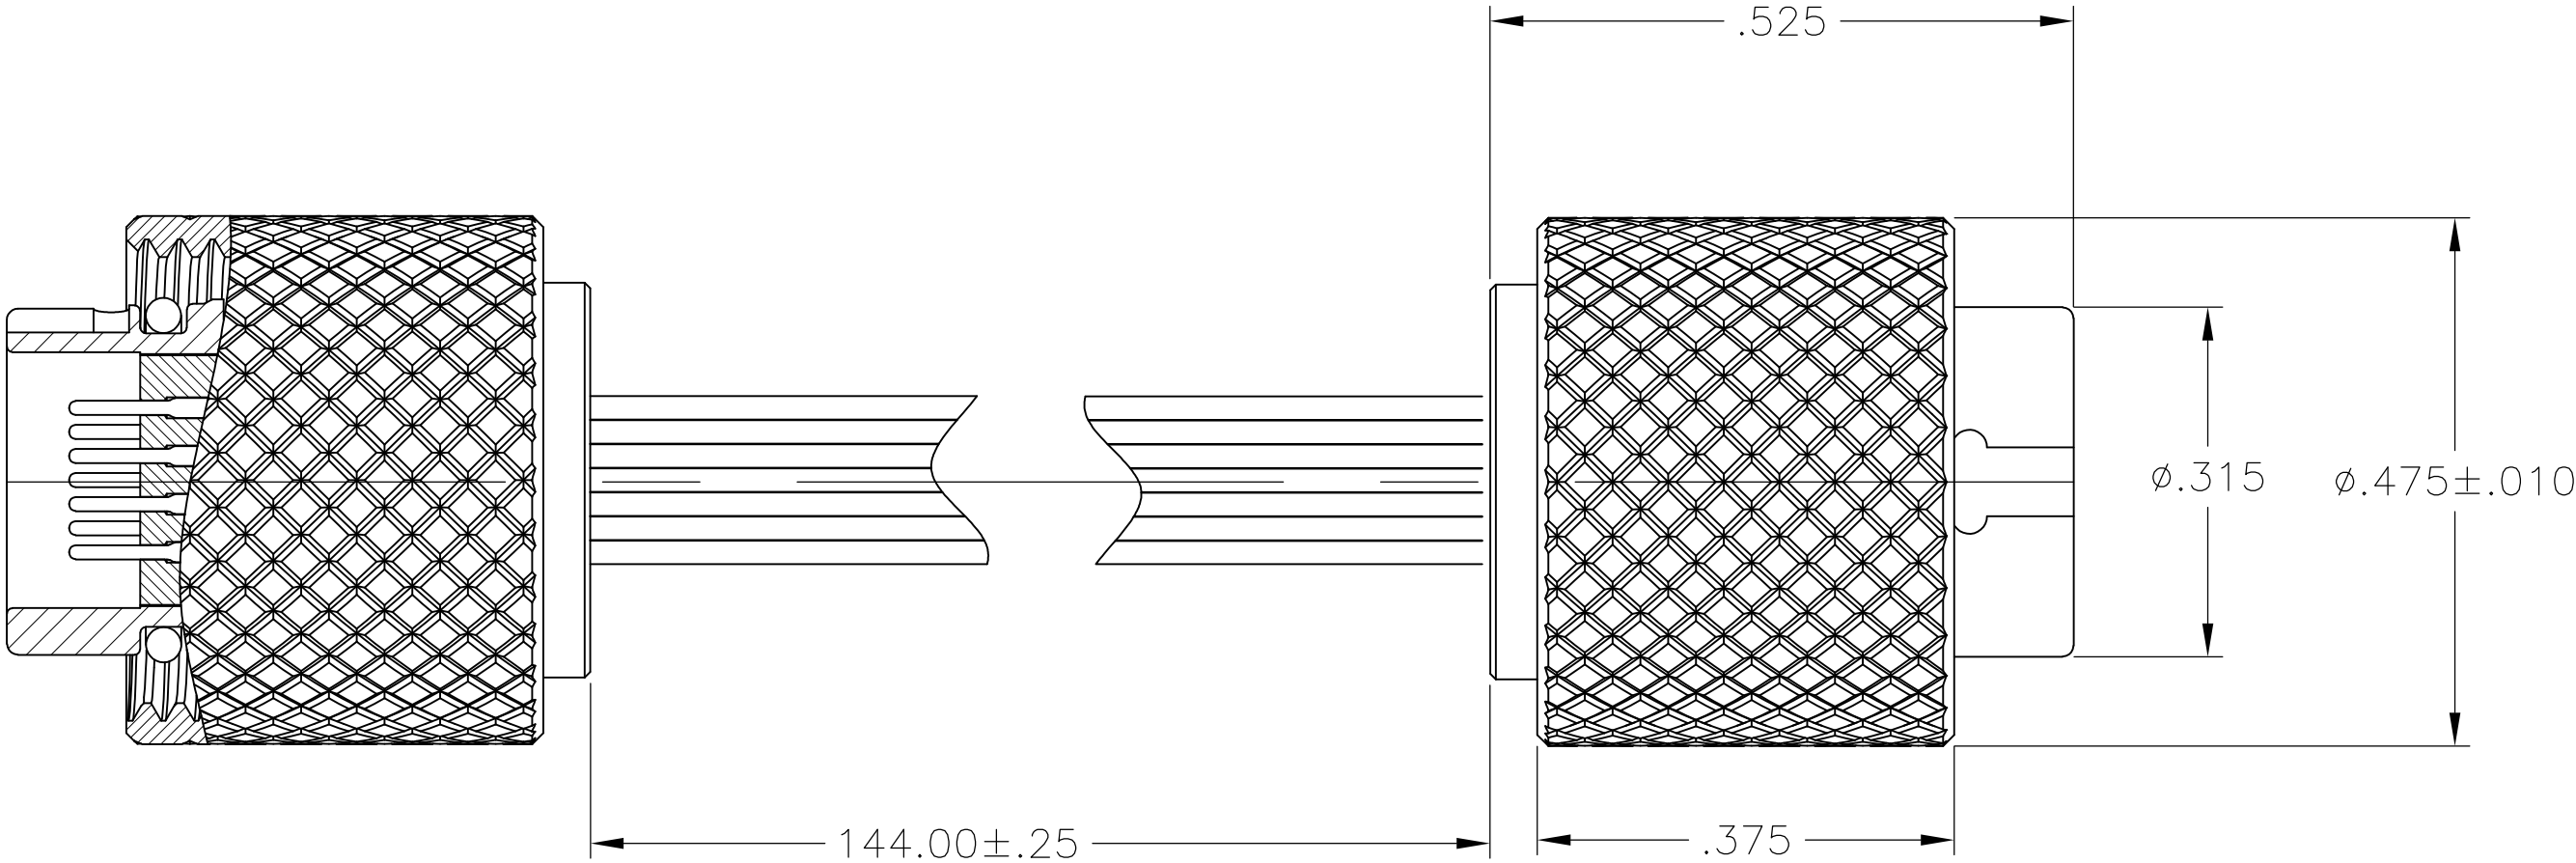
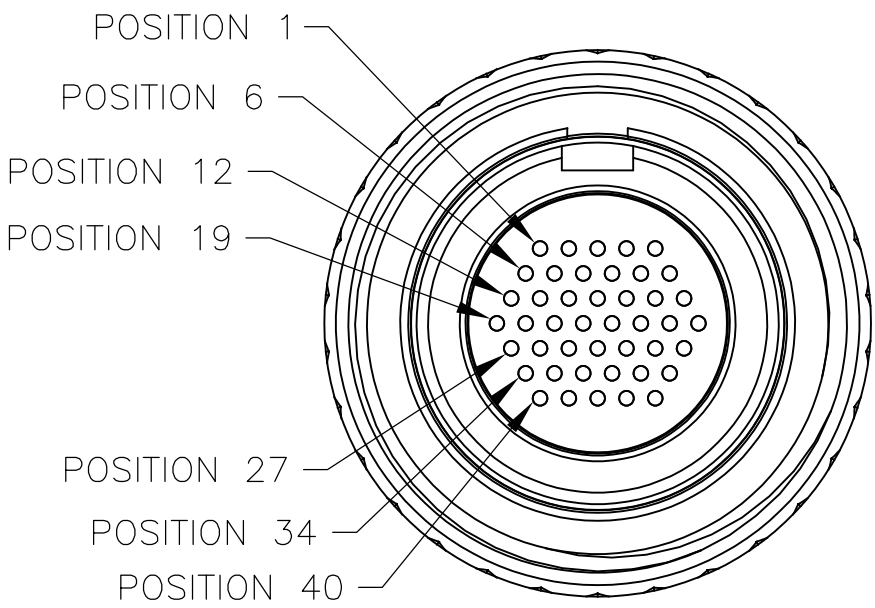


LOC	DIST	REVISIONS				
—	—	P	LTR	DESCRIPTION	DATE	APVD
		A		RELEASED PER ECO 13-018496	11-22-13	CT RL



1. CONNECTOR BODY AND COUPLING NUT MATERIAL: 6061-T6 ALUMINUM, ELECTROLESS NICKEL PLATED PER SAE-AMS-C-26074 OR SAE-AMS-2404E
LOCKING RING MATERIAL: BERYLLIUM COPPER, ELECTROLESS NICKEL PLATED PER SAE-AMS-C-26074 OR SAE-AMS-2404E
INSULATOR MATERIAL: LIQUID CRYSTAL POLYMER (LCP) PER ASTM D5138 OR POLYPHENYLENE SULFIDE (PPS) PER ASTM D4067
O-RING MATERIAL: FLUOROSILICONE
2. WIRE TERMINATION: 34 AWG STRANDED WIRE
3. LUBRICATE O-RING WITH PARKER SUPER-O-LUBE PRIOR TO INSTALLATION
4. THE SAME CONNECTOR IS TERMINATED AT BOTH ENDS OF THIS JUMPER ASSEMBLY
5. NANONICS PART NUMBER: JCM044PP4DX144TT

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C.C.THOMAS 8-29-13		 TE Connectivity						
		CHK R.LEASE 8-29-13								
		APVD R.LEASE 8-29-13								
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME PLUG ASSEMBLY,CIRCULAR,THREADED COUPLING, METAL, 44 POSITION —						
	0 PLC ± —		PRODUCT SPEC							
	1 PLC ± —		—							
	2 PLC ± .01		APPLICATION SPEC							
	3 PLC ± .005		—							
	4 PLC ± —		—							
ANGLES ± 1°				SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO			
MATERIAL	FINISH	WEIGHT	—	A2	0PJN9	C=1-1925270-2	—			
SEE NOTE 1		SEE NOTE 1		CUSTOMER DRAWING				SCALE 6:1	SHEET 1 of 1	REV A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-1925270-2](#)