
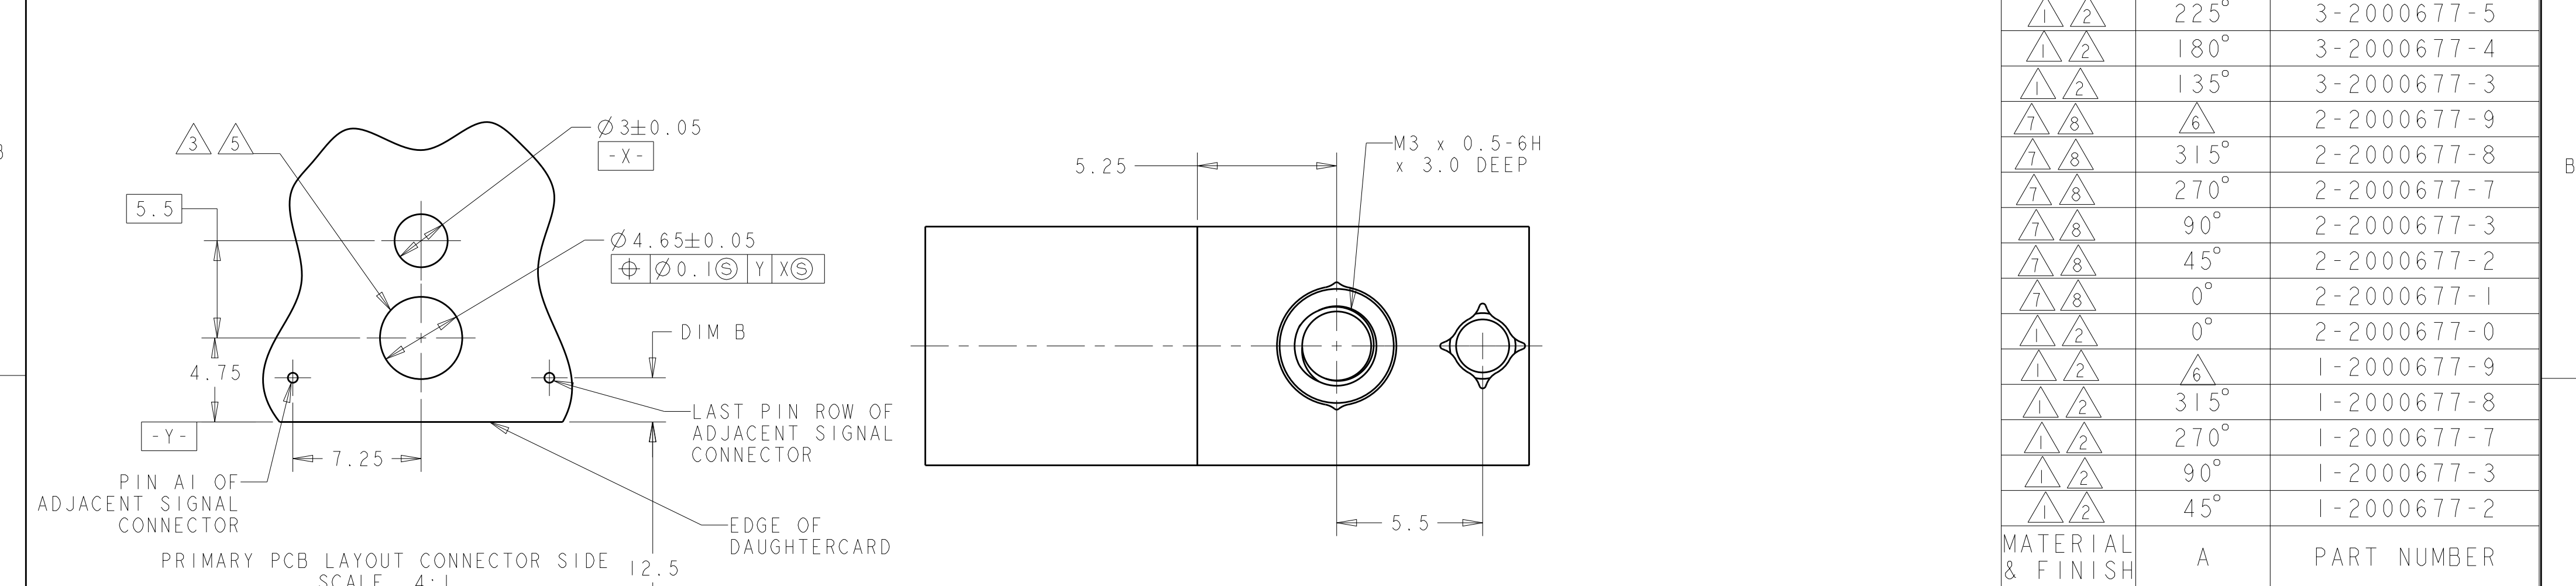


- 1 MATERIAL:HOUSING: ALUMINUM 6061.
- 2 FINISH: 0.025 MIN ELECTROLESS NICKEL
PER AMS-C-26074, GRADE A, CLASS 4.
- 3 HOLE FOR POSITIVE RETENTION SCREW.
- 4 DASH NUMBERS INDICATE KEY ORIENTATION
(P/N 1-2000677-2 SHOWN ON DRAWING)
- 5 GROUND PAD Ø5mm ON BOTH SIDE OF PCB.
- 6 GUIDE MODULE W/O KEYING
- 7 MATERIAL: HOUSING: STAINLESS STEEL 303.
- 8 FINISH: PASSIVATED.

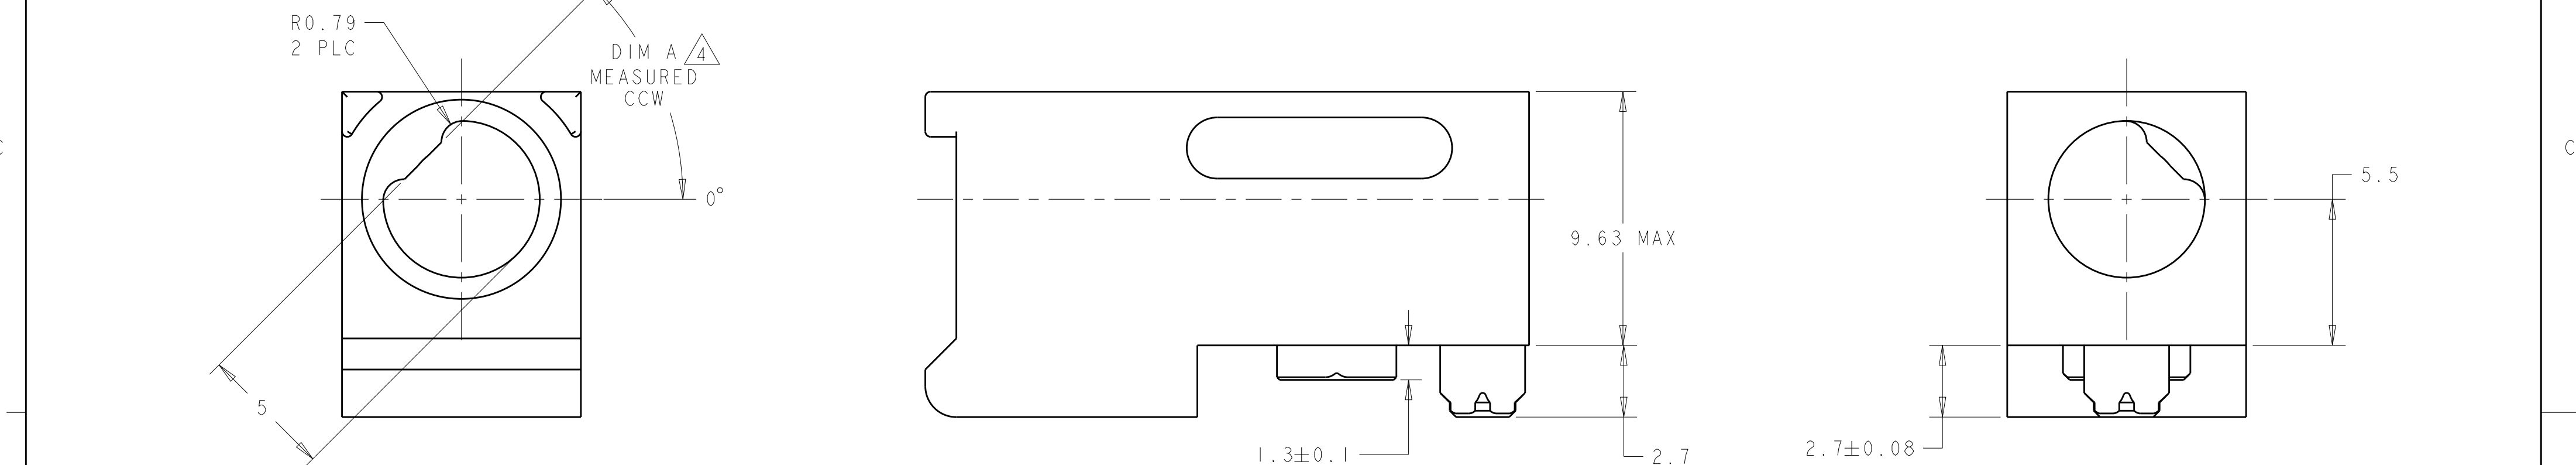

12	225°	3-2000677-5
12	180°	3-2000677-4
12	135°	3-2000677-3
78	6	2-2000677-9
78	315°	2-2000677-8
78	270°	2-2000677-7
78	90°	2-2000677-3
78	45°	2-2000677-2
78	0°	2-2000677-1
12	0°	2-2000677-0
12	6	1-2000677-9
12	315°	1-2000677-8
12	270°	1-2000677-7
12	90°	1-2000677-3
12	45°	1-2000677-2
MATERIAL & FINISH	A	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:

mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±-

1 PLC ±0.5

2 PLC ±0.13

3 PLC ±-

4 PLC ±-

ANGLES ±1

FINISH

MATERIAL

SEE TABLE material_2

DWN BH 11JAN2008

CHK MRM 11JAN2008

APVD MRM 11JAN2008

PRODUCT SPEC -

APPLICATION SPEC -

WEIGHT -

CUSTOMER DRAWING

TE Connectivity

NAME HOUSING, GUIDE MODULE/STANDOFF, RIGHT ANGLE, KEYED, 20.3mm,

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A200779

C-2000677

SCALE 5:1

SHEET 1 OF 1

REV E

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-2000677-8](#)