
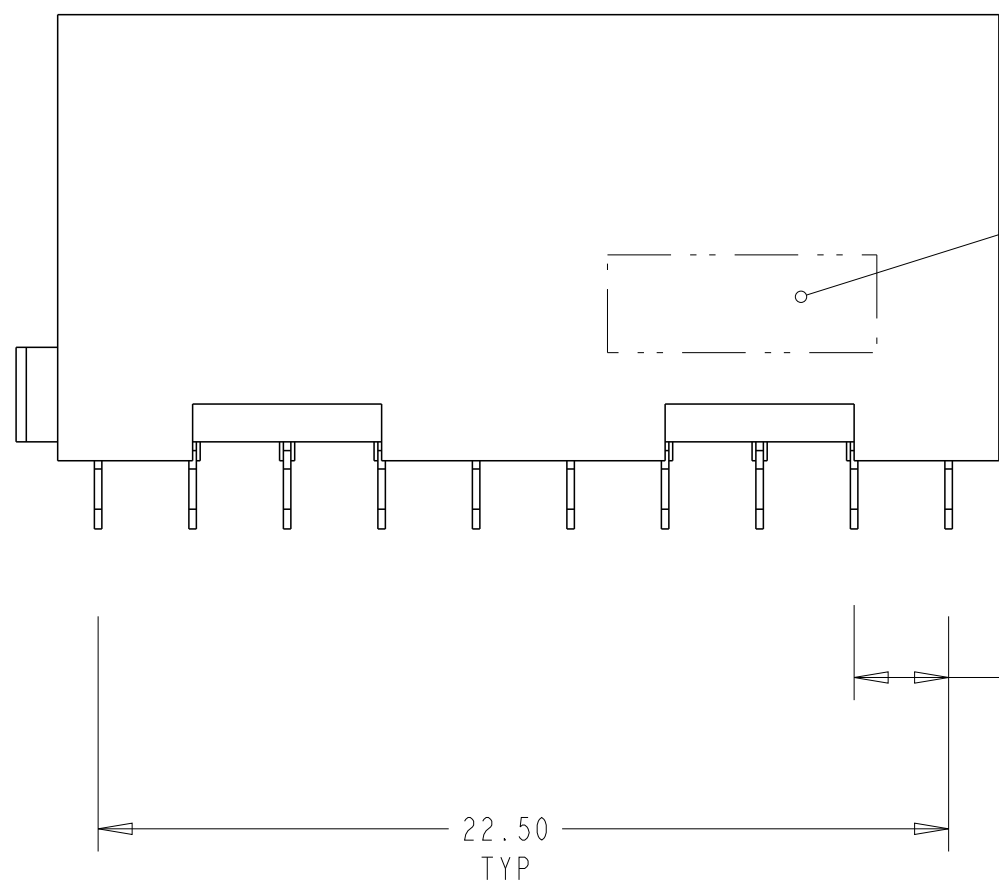


D


C

B


A

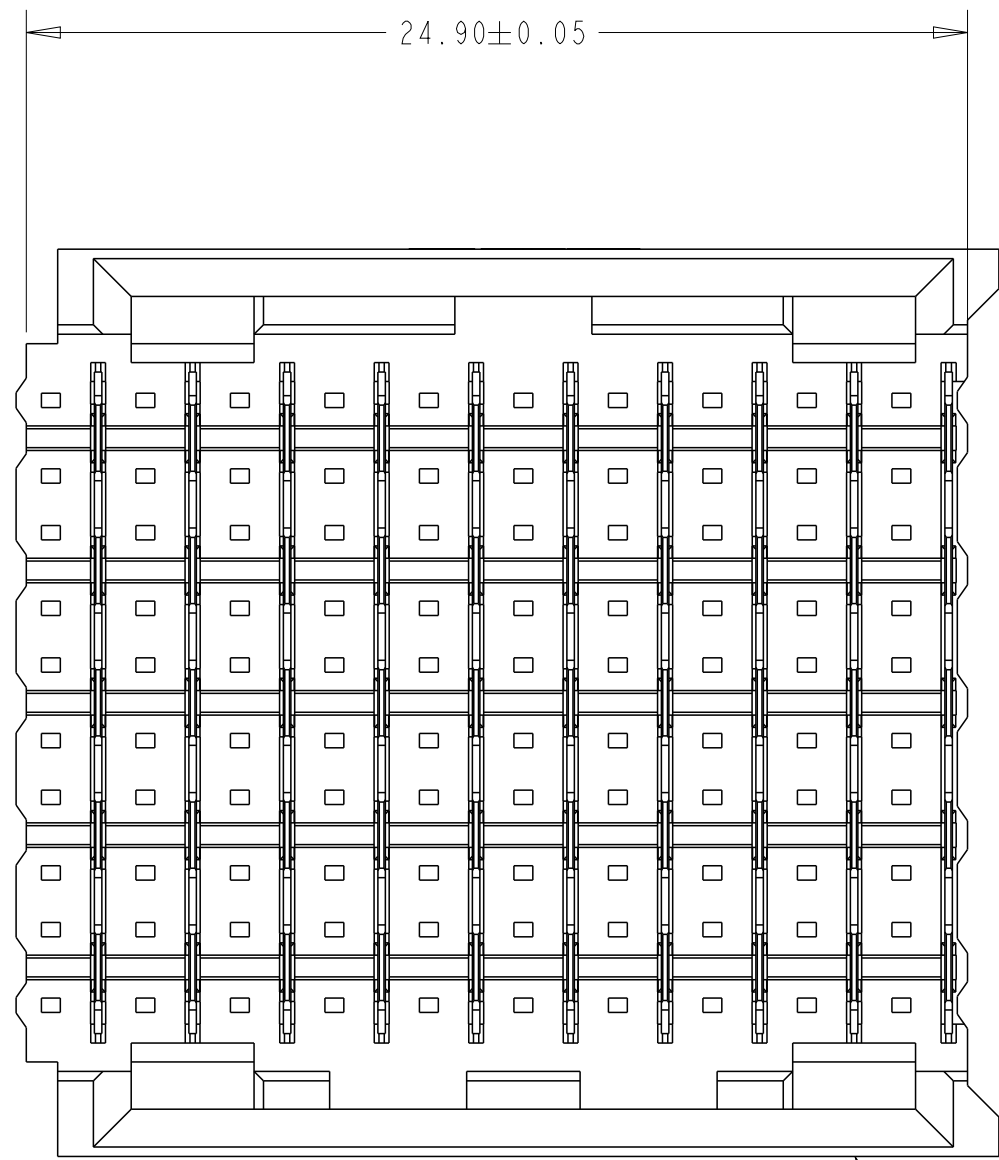

- 1 FINISH:
CONTACT MATING AREA MEETS THE PERFORMANCE REQUIREMENTS OF
TE CONNECTIVITY PRODUCT SPECIFICATION 108-1957; BASED ON
TELCORDIA GR-1217-CORE, APPLICATIONS IN UNCONTROLLED ENVIRONMENTS.
COMPLIANT PIN AREA: 0.5µm MIN MATTE TIN OVER BASE PLATING.
- 2 PHOSPHOR BRONZE
- 3 GLASS FILLED POLYESTER
- 4 DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER
- 5 CONNECTOR MARKED WITH PART NUMBER AND DATE CODE
- 6 REFERENCE APPLICATION SPEC 114-13020 FOR RECOMMENDED
PLATED THRU HOLE DIAMETER AND PLATING THICKNESS.
- 7 CONTACT AREA LUBRICATED WITH BELLCORE APPROVED LUBRICANT
TECHNICAL REFERENCE: GR-1217-CORE, ISSUE 1, NOVEMBER 1995
- 8 APPLICATION SEATING HEIGHT TO PRINTED CIRCUIT BOARD

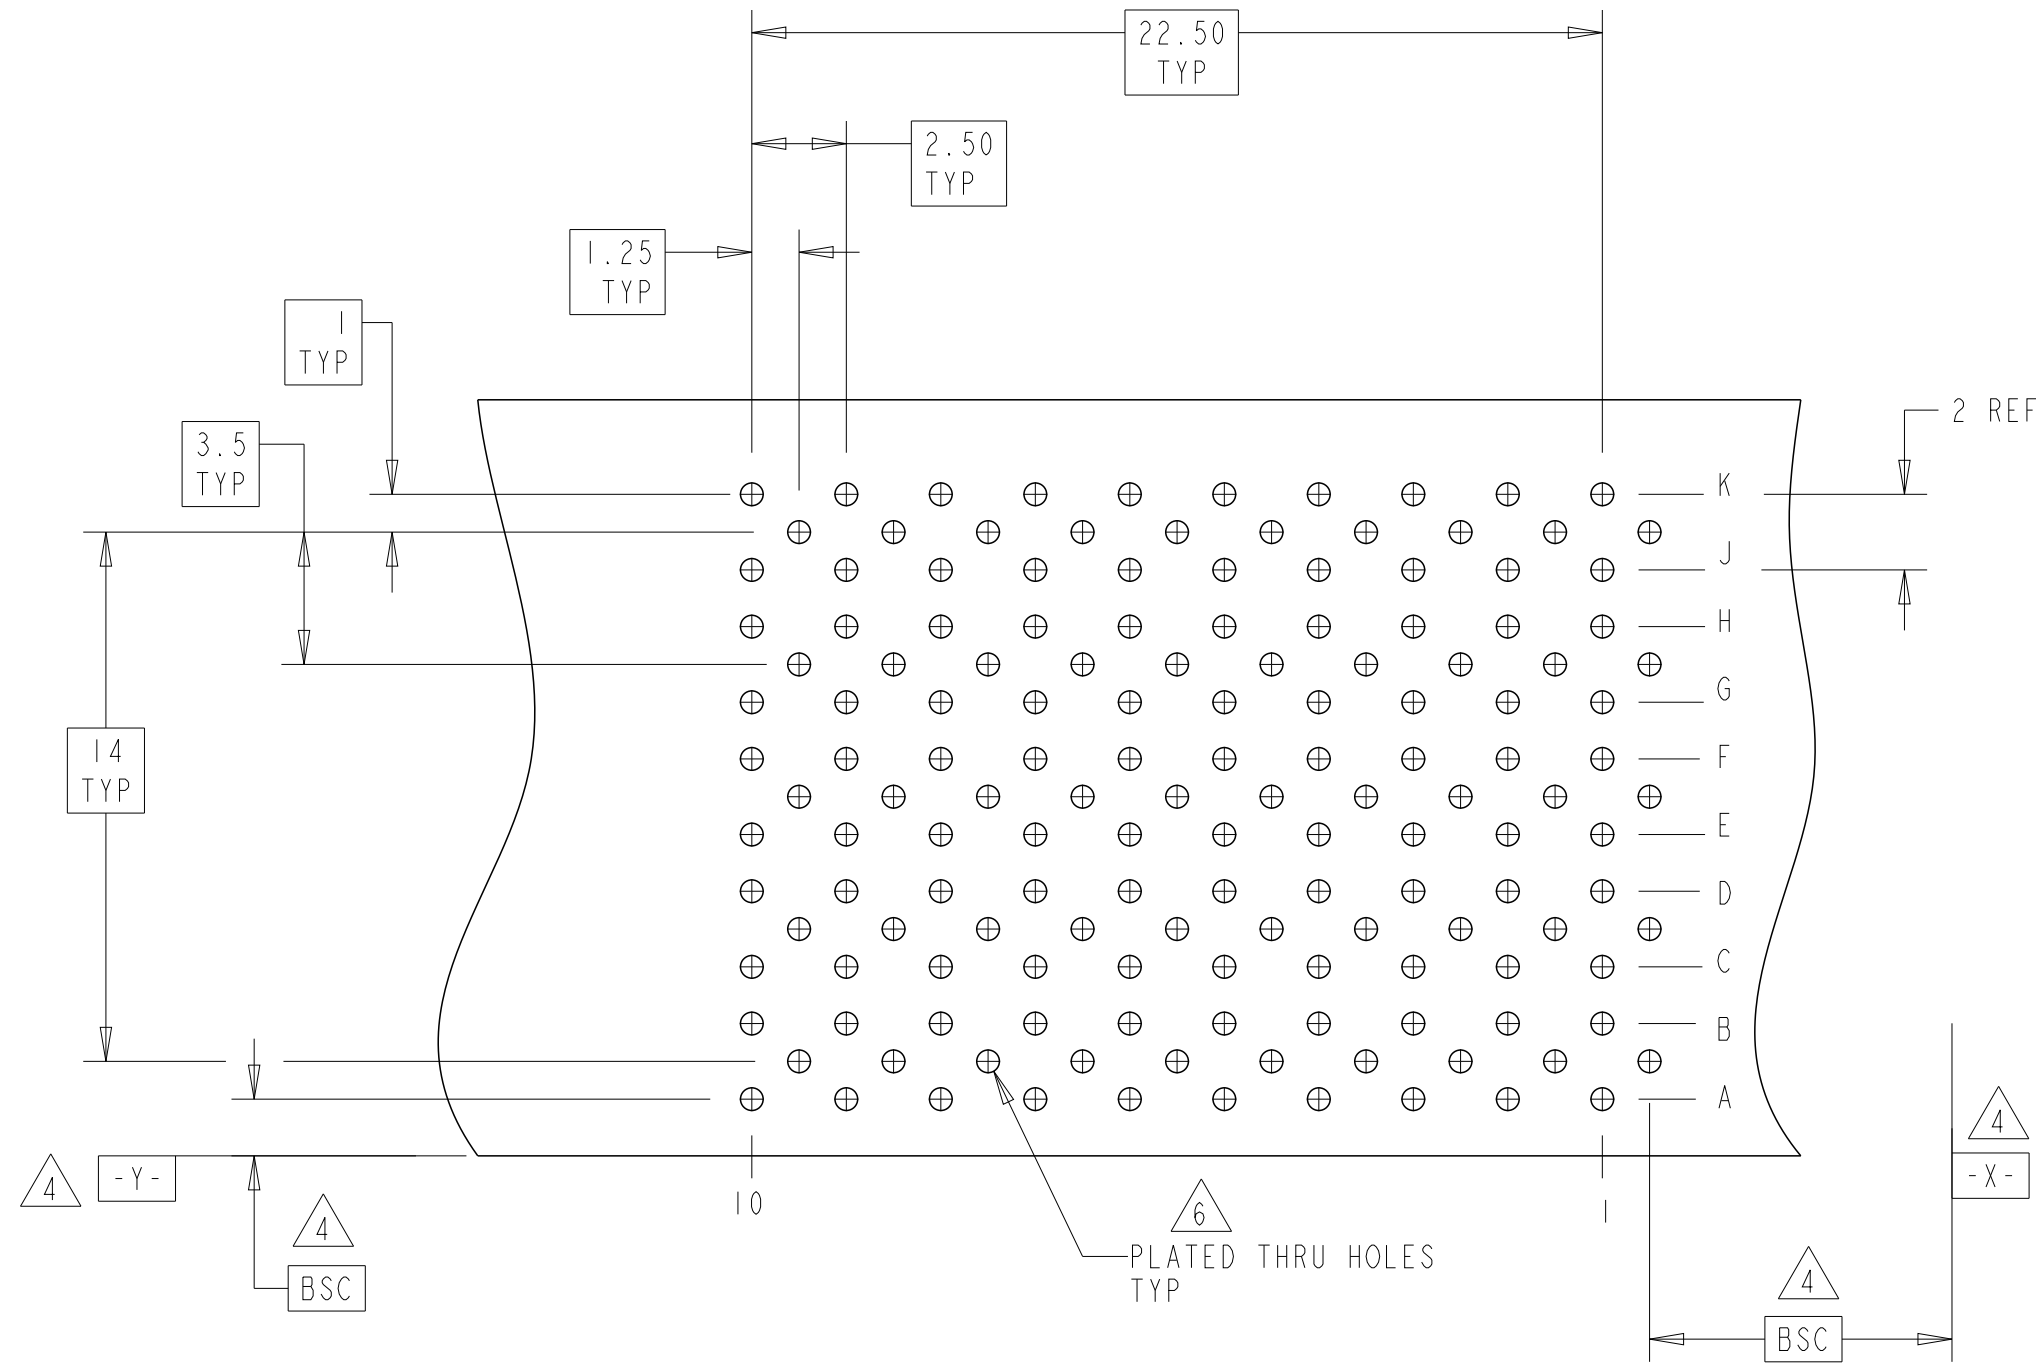

RECOMMENDED
PRINTED CIRCUIT BOARD
LAYOUT
COMPONENT SIDE OF PRINTED CIRCUIT BOARD

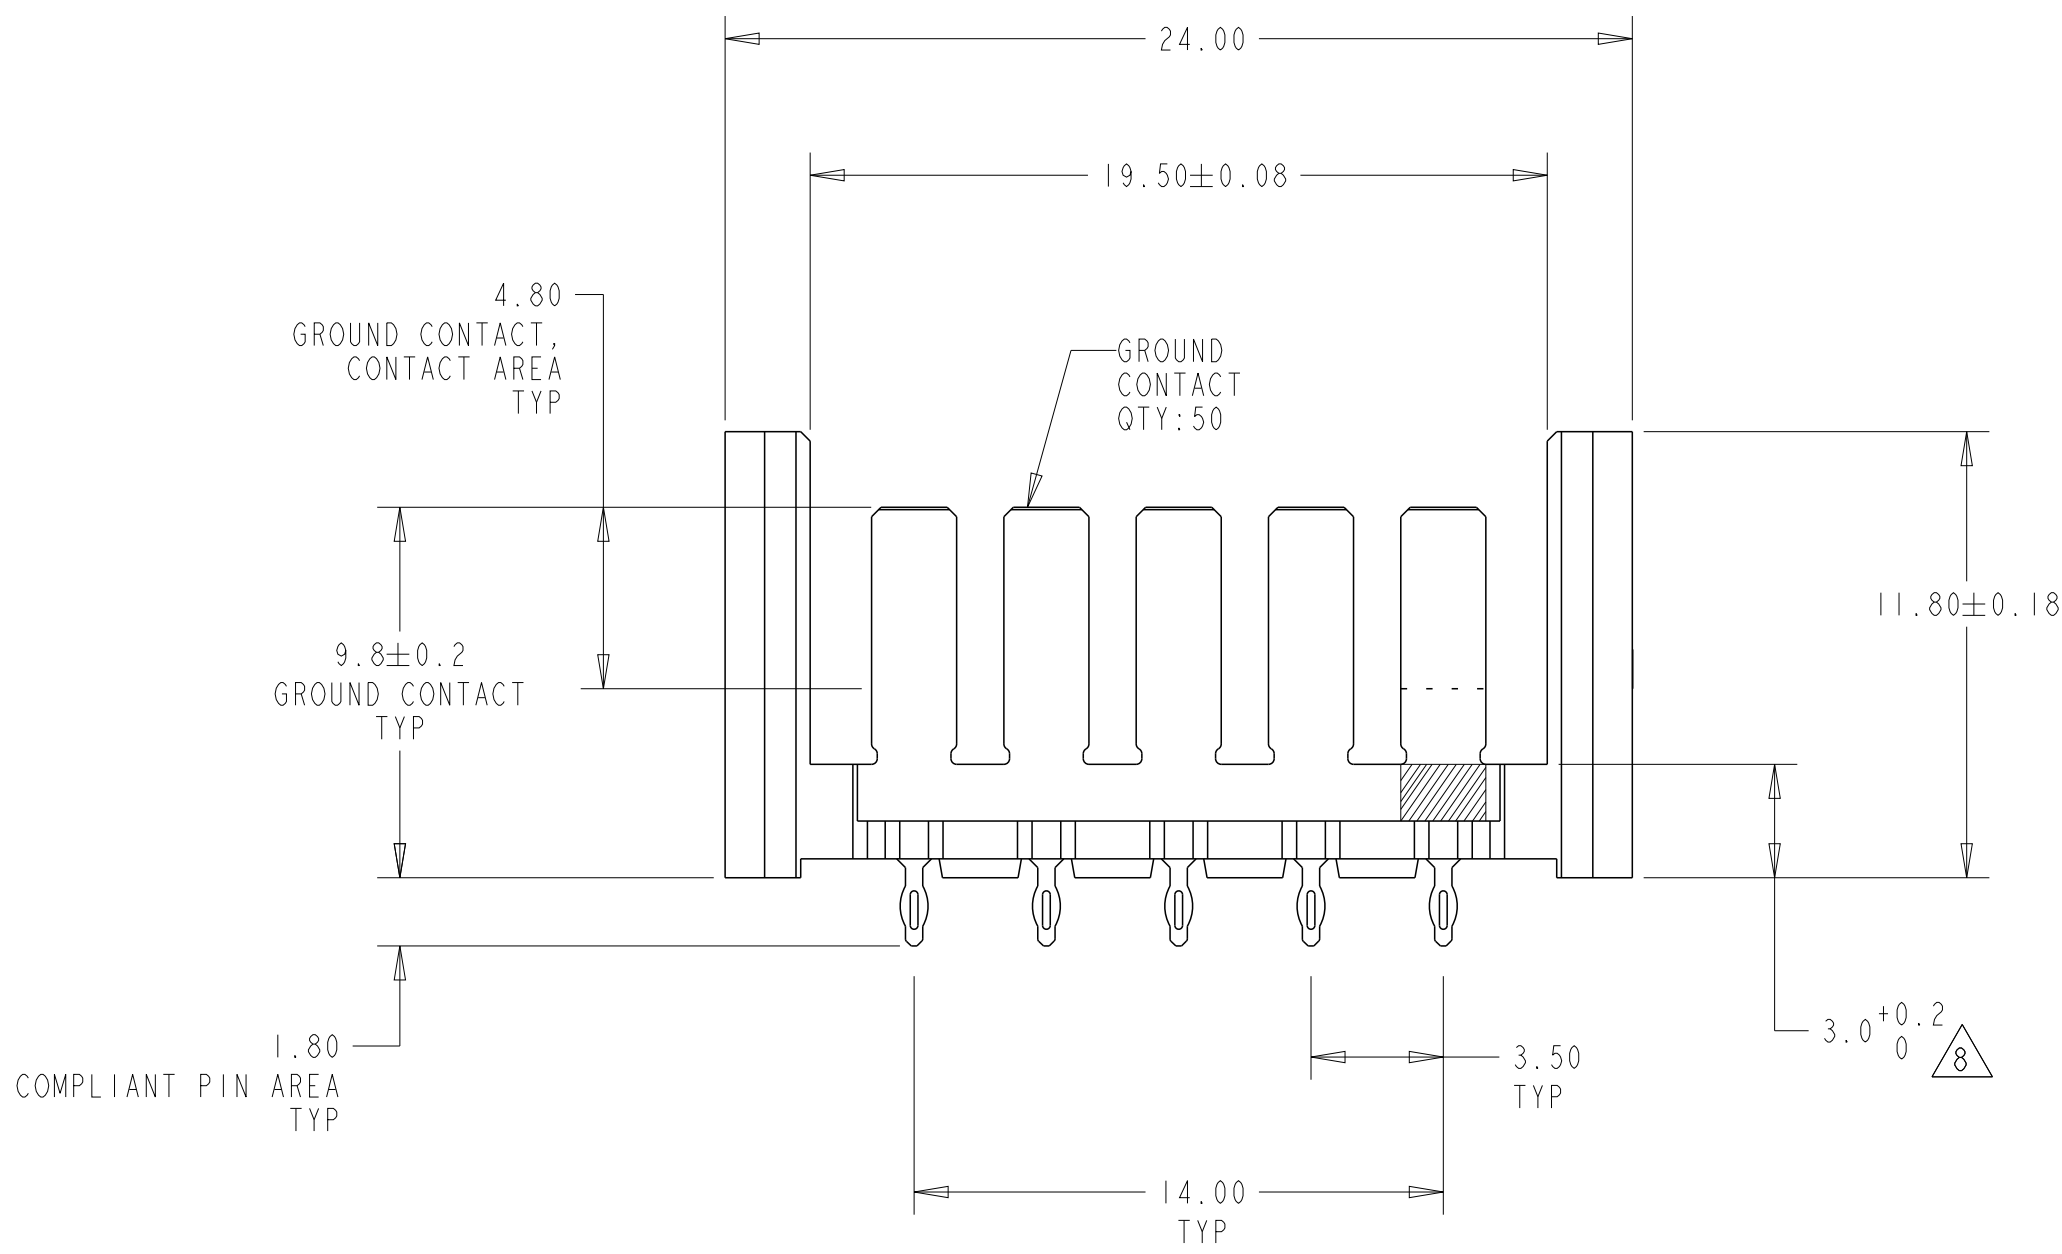

5120663-1
PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.			DWN B. CARBO		06DEC04		 TE Connectivity	
DIMENSIONS:			CHK R. PATTERSON		06DEC04			
mm			APVD R. PATTERSON		06DEC04		NAME	
			TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC		SHROUD ASSEMBLY, 100 POSITION, 10 ROW, BACKPLANE CONNECTOR, Z-PACK HS3	
			0 PLC ±		-			
			1 PLC ±		-			
			2 PLC ±0.13		-			
			3 PLC ±		-			
			4 PLC ±		APPLICATION SPEC		SIZE	
			ANGLES ±		-		CAGE CODE	
			FINISH		WEIGHT		DRAWING NO	
			GROUND CONTACT: 1		A 1		00779	
			CONTACTS: 2		CUSTOMER DRAWING		C=5120663	
MATERIAL HOUSING: 3					SCALE		SHEET 1 OF 1	
					5:1		REV A	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[5120663-1](#)