


© 2020TE Connectivity. All Rights Reserved.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	2	INITIAL CUSTOMER DRAWING	20FEB2020	AFK	LS


FLATTENED
WIDTH

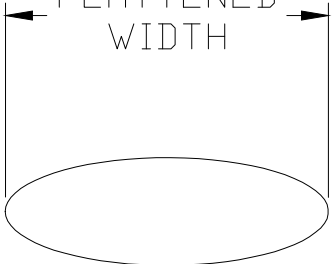


D

d

w

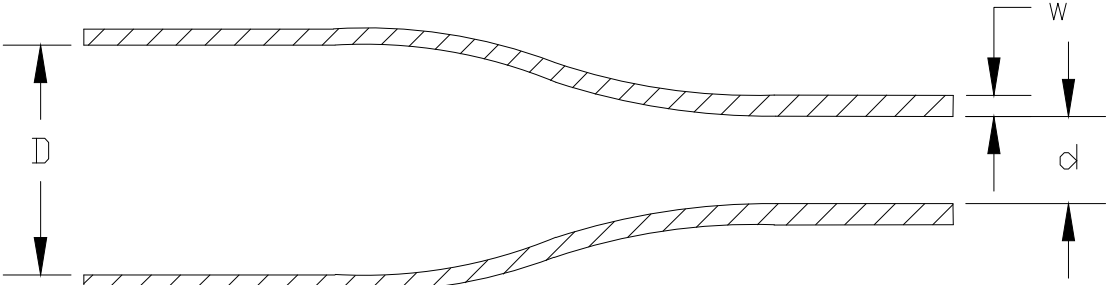

EXPANDED TUBING
PRODUCT

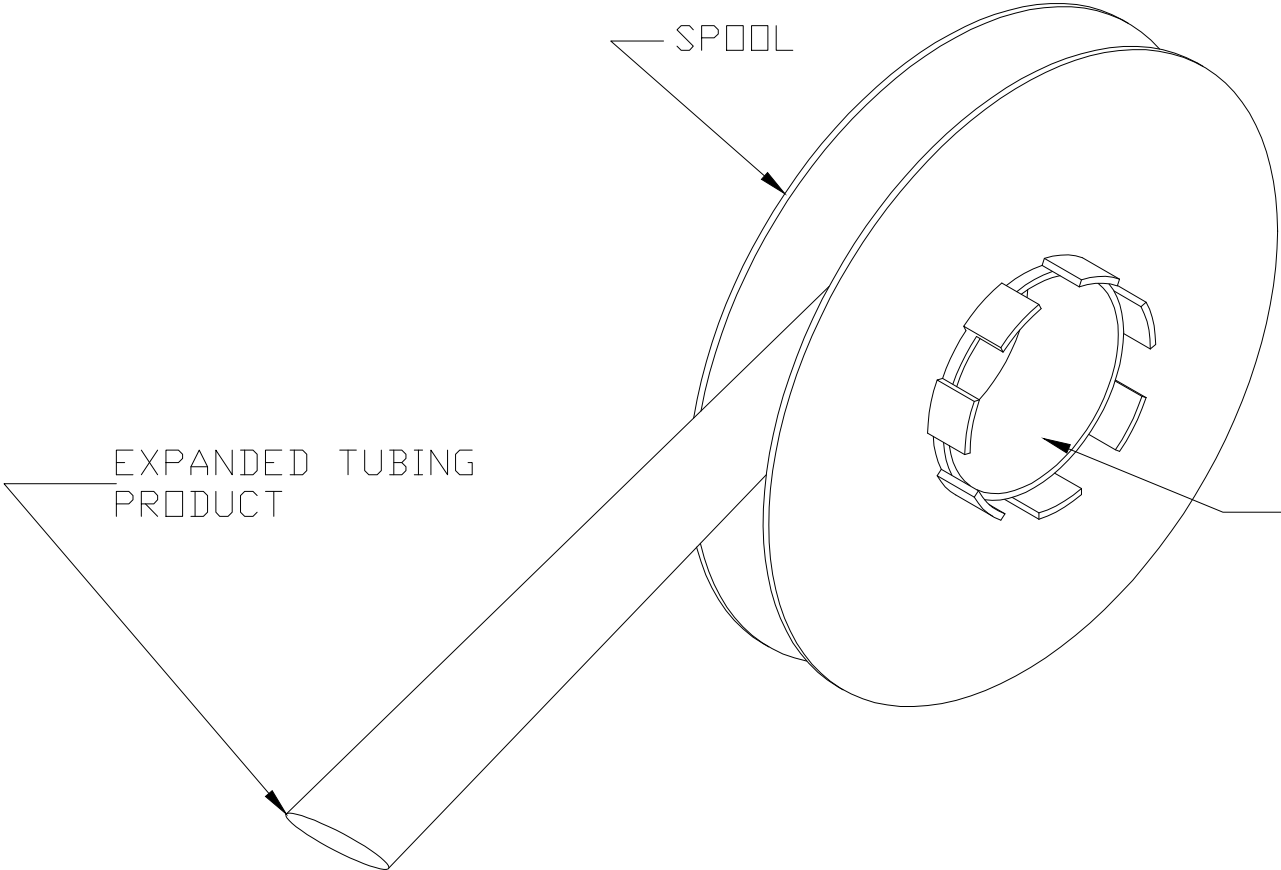


SPOOL

SPOOL I.D.
101 (4.0)

Product Size	3/32	1/8	3/16	1/4	3/8	1/2	3/4	1	1-1/2
"D" Minimum Supplied I.D.	2.36 (.093)	3.18 (.125)	4.75 (.187)	6.35 (.250)	9.53 (.375)	12.7 (.500)	19.0 (.750)	25.4 (1.00)	38.1 (1.50)
"d" Maximum Recovered I.D.	0.79 (.031)	1.58 (.063)	2.38 (.094)	3.18 (.125)	4.76 (.188)	6.35 (.250)	9.53 (.375)	12.7 (.500)	19.0 (.750)
"w" Recovered Wall Thickness	0.38±0.08 (.015±.003)	0.38±0.08 (.015±.003)	0.38±0.08 (.015±.003)	0.38±0.08 (.015±.003)	0.38±0.08 (.015±.003)	0.38±0.08 (.015±.003)	0.38±0.08 (.015±.003)	0.43±0.10 (.017±.004)	0.43±0.10 (.017±.004)
Minimum Sleeve Flattened Width	4.32 (.170)	5.84 (.230)	8.00 (.315)	10.7 (.420)	15.5 (.610)	20.3 (.799)	30.5 (1.20)	40.4 (1.59)	60.3 (2.37)

NOTES:
1. ALL DIMENSIONS ARE IN MILLIMETERS (inches).

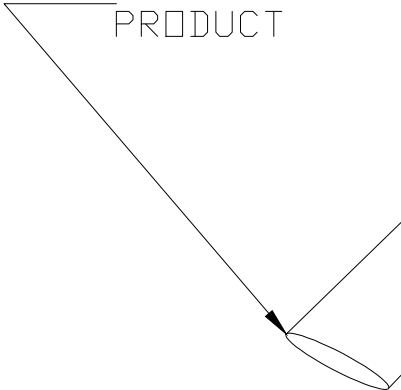THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN AFK CHK — APVD LS PRODUCT SPEC RW-2512 APPLICATION SPEC — WEIGHT VARIOUS	19FEB2020 — 20FEB2020 — — A3 — C=MCD170015		TE Connectivity HT-CT OUTSIDE PRINTER SPOOL — RESTRICTED TO —			
DIMENSIONS: mm 		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± — 1 PLC ± — 2 PLC ± — 3 PLC ± — 4 PLC ± — ANGLES ± — FINISH —		CUSTOMER DRAWING		SCALE —	SHEET 1 OF 1	REV 2
MATERIAL CROSS-LINKED PvDF								

1470-19 (1/15)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[EL7356-000](#)