


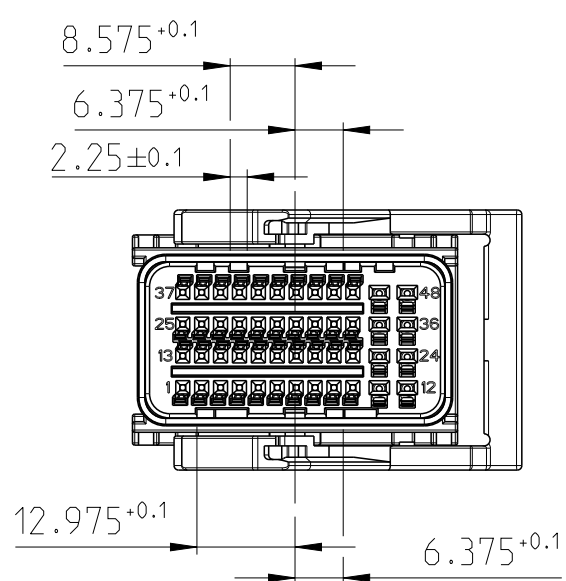

CODING 2
GREY
LEVER RIGHT
CABLE EXIT LEFT
PN 1670069 / 2177514 /
2288257


Technical drawing of a 16-pin D-sub connector. The drawing shows the connector from a top-down perspective, highlighting the pin layout and dimensions. The dimensions are as follows:

- Overall width: $12.975^{+0.1}_{-0}$
- Pin pitch (center-to-center): 2.25 ± 0.1
- Pin height: $8.575^{+0.1}_{-0}$
- Pin length: $10.775^{+0.1}_{-0}$

The connector has 16 pins arranged in two rows of 8. The pin numbers 1 through 16 are indicated on the right side of the connector.

CODING 3
BROWN
LEVER RIGHT
CABLE EXIT LEFT
PN 1670067 / 2177543 /
2288254



THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 10MAY2006 M. Kressmann CHK 24MAY2006 K. Roth 23JUL2007		 TE Connectivity	
DIMENSIONS: mm 		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±0.3 1 PLC ±0.3 2 PLC ±0.3 3 PLC ±0.3 4 PLC ±0.3 ANGLES ±1.5°		NAME 48POS. MIXED RECEPTACLE HOUSING 40xMQS AND 8x1.5	
MATERIAL -		PRODUCT SPEC - APPLICATION SPEC 114-18761-1 WEIGHT -		SIZE CAGE CODE DRAWING NO A1 00779 C-1719678	
FINISH -		CUSTOMER DRAWING		SCALE 2:1 SHEET 1 of 1 REV	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[9-1670069-9](#)