
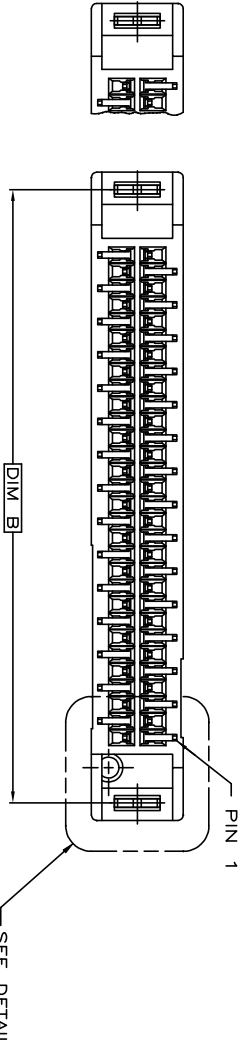
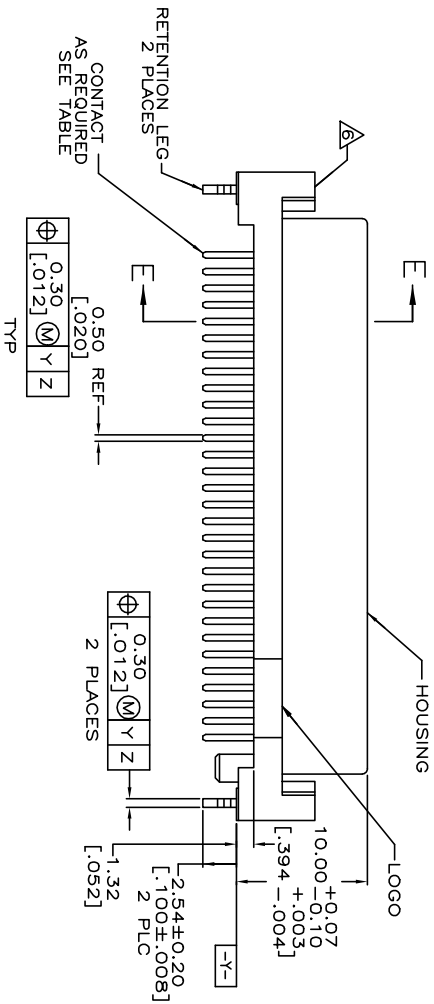
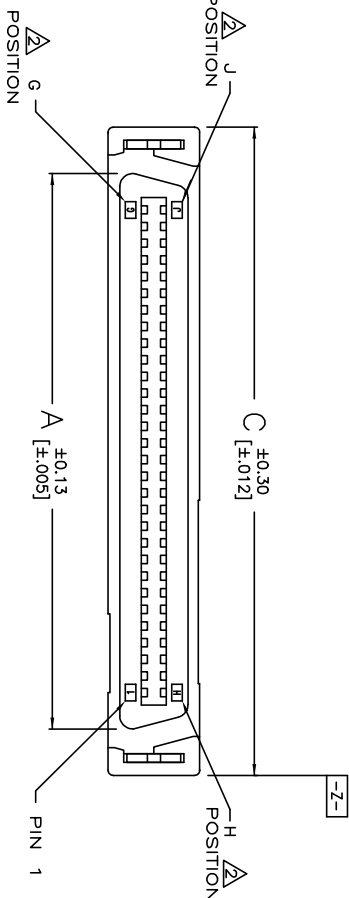


REVISIONS


P	LTR	DESCRIPTION	DATE	DWN	APVD
E3		REVISED. ECO-19-017538	18NOV2019	S.H	S.H

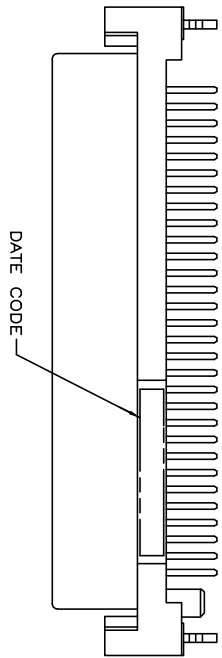

MATERIALS:



HOUSING- PPA RESIN, BLACK, MOLDING COMPOUND.
CONTACTS- PHOSPHOR-BRONZE PLATED WITH MINIMUM THICK (SEE TABLE) GOLD IN CONTACT AREA AND 3.8μm [.000150] MINIMUM THICK MATTE TIN ON SOLDER TINES OVER 1.27μm MINIMUM THICK NICKEL UNDERPLATE.
RETENTION LEG- BRASS PLATED WITH 3.8μm [.000150] MINIMUM TIN-Cu OVER 1.3μm [.000051] MINIMUM NICKEL UNDERPLATE.

- G, J, AND H INDICATE NUMBER OF POSITION MARKED ON ASSEMBLY. ALSO SEE TABLE.
- ALL DIMENSIONS SHOWN ARE MAXIMUM UNLESS OTHERWISE SPECIFIED.
- 60 POSITION AS SHOWN.
- RETENTION LEGS NOT PRESENT.
- TOP OF RETENTION LEG MAY NOT PROTRUDE ABOVE THIS SURFACE.
- HOUSING BOW UP TO 0.30 [.012] ALLOWED.
- CONNECTOR WILL ACCOMMODATE MATING PRINTED CIRCUIT BOARD OF 1.6±0.07 [.063±.003] THICKNESS.
- WAVE SOLDER CAPABLE TO 265°C PER TE SPEC 109-202, CONDITION B.
- REMOVE CONTACT POSITION FROM #11-#17 AND #36-#42.
- RECOMMEND CARD EDGE DIM. (PAGE2)
- GOLD FLASH OVER 0.762μm [30μ"] MIN. PALLADIUM-NICKEL PLATED.
- OBsolete
- REMOVE CONTACT POSITION FROM #23-#29 AND #57-#63.

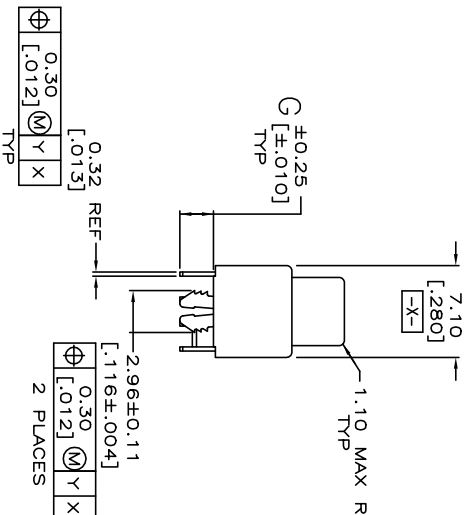

2.36 [.093]	3.30 [.130]	38.53 [1.517]	49.45 [1.947]	46.81 [1.843]	42.37 [1.668]	30	60	31	Δ	8-1734101-6	
2.36 [.093]	3.30 [.130]	127.43 [5.017]	138.35 [5.447]	135.71 [5.343]	131.27 [5.168]	1002001-0	1002001-0	1002001-0	GOLD FLASH 0.381um[15u"]	5-1734101-6	
0.8-1.6 [.031-.063]	2.54 [.100]	127.43 [5.017]	138.35 [5.447]	135.71 [5.343]	131.27 [5.168]	1002001-0	1002001-0	1002001-0	GOLD FLASH 0.381um[15u"]	3-1734101-5	Δ
0.8-1.6 [.031-.063]	2.54 [.100]	102.03 [4.017]	112.95 [4.447]	110.31 [4.343]	105.87 [4.168]	80	160	81	GOLD FLASH 0.381um[15u"]	5-1734101-4	Δ
2.36 [.093]	3.30 [.130]	76.63 [3.017]	87.55 [3.447]	84.91 [3.343]	80.47 [3.168]	60	120	61	GOLD FLASH 0.381um[15u"]	5-1734101-3	120
0.8-1.6 [.031-.063]	2.54 [.100]	76.63 [3.017]	87.55 [3.447]	84.91 [3.343]	80.47 [3.168]	60	120	61	GOLD FLASH 0.381um[15u"]	3-1734101-2	120
2.36 [.093]	3.30 [.130]	63.93 [2.517]	74.85 [2.947]	72.21 [2.843]	67.77 [2.668]	50	100	51	GOLD FLASH 0.381um[15u"]	5-1734101-0	100
0.8-1.6 [.031-.063]	2.54 [.100]	51.23 [2.017]	62.15 [2.447]	59.51 [2.343]	55.07 [2.168]	40	80	41	GOLD FLASH 0.381um[15u"]	3-1734101-8	80
2.36 [.093]	3.30 [.130]	51.23 [2.017]	62.15 [2.447]	59.51 [2.343]	55.07 [2.168]	40	80	41	GOLD FLASH 0.381um[15u"]	6-1734101-9	80
0.8-1.6 [.031-.063]	2.54 [.100]	51.23 [2.017]	62.15 [2.447]	59.51 [2.343]	55.07 [2.168]	40	80	41	GOLD FLASH 0.381um[15u"]	6-1734101-8	80
2.36 [.093]	3.30 [.130]	43.61 [1.717]	54.53 [2.147]	51.89 [2.043]	47.45 [1.868]	34	68	35	GOLD FLASH 0.381um[15u"]	6-1734101-7	68
0.8-1.6 [.031-.063]	2.54 [.100]	43.61 [1.717]	54.53 [2.147]	51.89 [2.043]	47.45 [1.868]	34	68	35	GOLD FLASH 0.381um[15u"]	6-1734101-6	68
2.36 [.093]	3.30 [.130]	38.53 [1.517]	49.45 [1.947]	46.81 [1.843]	42.37 [1.668]	30	60	31	GOLD FLASH 0.381um[15u"]	6-1734101-5	60
0.8-1.6 [.031-.063]	2.54 [.100]	38.53 [1.517]	49.45 [1.947]	46.81 [1.843]	42.37 [1.668]	30	60	31	GOLD FLASH 0.381um[15u"]	6-1734101-4	60
2.36 [.093]	3.30 [.130]	32.18 [1.267]	43.10 [1.697]	40.46 [1.593]	36.02 [1.418]	25	50	26	GOLD FLASH 0.381um[15u"]	5-1734101-7	50
0.8-1.6 [.031-.063]	2.54 [.100]	32.18 [1.267]	43.10 [1.697]	40.46 [1.593]	36.02 [1.418]	25	50	26	GOLD FLASH 0.381um[15u"]	5-1734101-7	50
2.36 [.093]	3.30 [.130]	25.83 [1.017]	36.75 [1.447]	34.11 [1.343]	29.67 [1.168]	20	40	21	GOLD FLASH 0.381um[15u"]	6-1734101-5	40
0.8-1.6 [.031-.063]	2.54 [.100]	25.83 [1.017]	36.75 [1.447]	34.11 [1.343]	29.67 [1.168]	20	40	21	GOLD FLASH 0.381um[15u"]	6-1734101-4	40
2.36 [.093]	3.30 [.130]	25.83 [1.017]	36.75 [1.447]	34.11 [1.343]	29.67 [1.168]	20	40	21	GOLD FLASH 0.381um[15u"]	6-1734101-3	40
0.8-1.6 [.031-.063]	2.54 [.100]	25.83 [1.017]	36.75 [1.447]	34.11 [1.343]	29.67 [1.168]	20	40	21	GOLD FLASH 0.381um[15u"]	6-1734101-3	40
2.36 [.093]	3.30 [.130]	25.83 [1.017]	36.75 [1.447]	34.11 [1.343]	29.67 [1.168]	20	40	21	GOLD FLASH 0.381um[15u"]	6-1734101-3	40
0.8-1.6 [.031-.063]	2.54 [.100]	25.83 [1.017]	36.75 [1.447]	34.11 [1.343]	29.67 [1.168]	20	40	21	GOLD FLASH 0.381um[15u"]	6-1734101-3	40
2.36 [.093]	3.30 [.130]	25.83 [1.017]	36.75 [1.447]	34.11 [1.343]	29.67 [1.168]	20	40	21	GOLD FLASH 0.381um[15u"]	6-1734101-3	40
0.8-1.6 [.031-.063]	2.54 [.100]	25.83 [1.017]	36.75 [1.447]	34.11 [1.343]	29.67 [1.168]	20	40	21	GOLD FLASH 0.381um[15u"]	6-1734101-3	40
2.36 [.093]	3.30 [.130]	25.83 [1.017]	36.75 [1.447]	34.11 [1.343]	29.67 [1.168]	20	40	21	GOLD FLASH 0.381um[15u"]	6-1734101-3	40
0.8-1.6 [.031-.063]	2.54 [.100]	25.83 [1.017]	36.75 [1.447]	34.11 [1.343]	29.67 [1.168]	20	40	21	GOLD FLASH 0.381um[15u"]	6-1734101-3	40
2.36 [.093]	3.30 [.130]	25.83 [1.017]	36.75 [1.447]	34.11 [1.343]	29.67 [1.168]	20	40	21	GOLD FLASH 0.381um[15u"]	6-1734101-3	40
0.8-1.6 [.031-.063]	2.54 [.100]	25.83 [1.017]	36.75 [1.447]	34.11 [1.343]	29.67 [1.168]	20	40	21	GOLD FLASH 0.381um[15u"]	6-1734101-3	40
2.36 [.093]	3.30 [.130]	25.83 [1.017]	36.75 [1.447]	34.11 [1.343]	29.67 [1.168]	20	40	21	GOLD FLASH 0.381um[15u"]	6-1734101-3	40
0.8-1.6 [.031-.063]	2.54 [.100]	25.83 [1.017]	36.75 [1.447]	34.11 [1.343]	29.67 [1.168]	20	40	21	GOLD FLASH 0.381um[15u"]	6-1734101-3	40
2.36 [.093]	3.30 [.130]	25.83 [1.017]	36.75 [1.447]	34.11 [1.343]	29.67 [1.168]	20	40	21	GOLD FLASH 0.381um[15u"]	6-1734101-3	40
0.8-1.6 [.031-.063]	2.54 [.100]	25.83 [1.017]	36.75 [1.447]	34.11 [1.343]	29.67 [1.168]	20	40	21	GOLD FLASH 0.381um[15u"]	6-1734101-3	40
2.36 [.093]	3.30 [.130]	25.83 [1.017]	36.75 [1.447]	34.11 [1.343]	29.67 [1.168]	20	40	21	GOLD FLASH 0.381um[15u"]	6-1734101-3	40
0.8-1.6 [.031-.063]	2.54 [.100]	25.83 [1.017]	36.75 [1.447]	34.11 [1.343]	29.67 [1.168]	20	40	21	GOLD FLASH 0.381um[15u"]	6-1734101-3	40
2.36 [.093]	3.30 [.130]	25.83 [1.017]	36.75 [1.447]	34.11 [1.343]	29.67 [1.168]	20	40	21	GOLD FLASH 0.381um[15u"]	6-1734101-3	40
0.8-1.6 [.031-.063]	2.54 [.100]	25.83 [1.017]	36.75 [1.447]	34.11 [1.343]	29.67 [1.168]	20	40	21	GOLD FLASH 0.381um[15u"]	6-1734101-3	40
2.36 [.093]	3.30 [.130]	25.83 [1.017]	36.75 [1.447]	34.11 [1.343]	29.67 [1.168]	20	40	21	GOLD FLASH 0.381um[15u"]	6-1734101-3	40
0.8-1.6 [.031-.063]	2.54 [.100]	25.83 [1.017]	36.75 [1.447]	34.11 [1.343]	29.67 [1.168]	20	40	21	GOLD FLASH 0.381um[15u"]	6-1734101-3	40
2.36 [.093]	3.30 [.130]	25.83 [1.017]	36.75 [1.447]	34.11 [1.343]	29.67 [1.168]	20	40	21	GOLD FLASH 0.381um[15u"]	6-1734101-3	40
0.8-1.6 [.031-.063]	2.54 [.100]	25.83 [1.017]	36.75 [1.447]	34.11 [1.343]	29.67 [1.168]	20	40	21	GOLD FLASH 0.381um[15u"]	6-1734101-3	40
2.36 [.093]	3.30 [.130]	25.83 [1.017]	36.75 [1.447]	34.11 [1.343]	29.67 [1.168]	20	40	21	GOLD FLASH 0.381um[15u"]	6-1734101-3	40
0.8-1.6 [.031-.063]	2.54 [.100]	25.83 [1.017]	36.75 [1.447]	34.11 [1.343]	29.67 [1.168]	20	40	21	GOLD FLASH 0.381um[15u"]	6-1734101-3	40
2.36 [.093]	3.30 [.130]	25.83 [1.017]	36.75 [1.447]	34.11 [1.343]	29.67 [1.168]	20	40	21	GOLD FLASH 0.381um[15u"]	6-1734101-3	40
0.8-1.6 [.031-.063]	2.54 [.100]	25.83 [1.017]	36.75 [1.447]	34.11 [1.343]	29.67 [1.168]	20	40	21	GOLD FLASH 0.381um[15u"]	6-1734101-3	40
2.36 [.093]	3.30 [.130]	25.83 [1.017]	36.75 [1.447]	34.11 [1.343]	29.67 [1.168]	20	40	21	GOLD FLASH 0.381um[15u"]	6-1734101-3	40
0.8-1.6 [.031-.063]	2.54 [.100]	25.83 [1.017]	36.75 [1.447]	34.11 [1.343]	29.67 [1.168]	20	40	21	GOLD FLASH 0.381um[15u"]	6-1734101-3	40
2.36 [.093]	3.30 [.130]	25.83 [1.017]	36.75 [1.447]	34.11 [1.343]	29.67 [1.168]	20	40	21	GOLD FLASH 0.381um[15u"]	6-1734101-3	40
0.8-1.6 [.031-.063]	2.54 [.100]	25.83 [1.017]	36.75 [1.447]	34.11 [1.343]	29.67 [1.168]	20	40	21	GOLD FLASH 0.381um[15u"]	6-1734101-3	40
2.36 [.093]	3.30 [.130]	25.83 [1.017]	36.75 [1.447]	34.11 [1.343]	29.67 [1.168]	20	40	21	GOLD FLASH 0.381um[15u"]	6-1734101-3	40
0.8-1.6 [.031-.063]	2.54 [.100]	25.83 [1.017]	36.75 [1.447]	34.11 [1.343]	29.67 [1.168]	20	40	21	GOLD FLASH 0.381um[15u"]	6-1734101-3	40
2.36 [.093]	3.30 [.130]	25.83 [1.017]	36.75 [1.447]	34.11 [1.343]	29.67 [1.168]	20	40	21	GOLD FLASH 0.381um[15u"]	6-1734101-3	40
0.8-1.6 [.031-.063]	2.54 [.100]	25.83 [1.017]	36.75 [1.447]	34.11 [1.343]	29.67 [1.168]	20	40	21	GOLD FLASH 0.381um[15u"]	6-1734101-3	40
2.36 [.093]	3.30 [.130]	25.83 [1.017]	36.75 [1.447]	34.11 [1.343]	29.67 [1.168]	20	40	21	GOLD FLASH 0.381um[15u"]	6-1734101-3	40
0.8-1.6 [.031-.063]	2.54 [.100]	25.83 [1.017]	36.75 [1.447]	34.11 [1.343]	29.67 [1.168]	20	40	21	GOLD FLASH 0.381um[15u"]	6-1734101-3	40
2.36 [.093]	3.30 [.130]	25.83 [1.017]	36.75 [1.447]	34.11 [1.343]	29.67 [1.168]	20	40	21	GOLD FLASH 0. FLASH		

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
		SEE SHEET 1.			

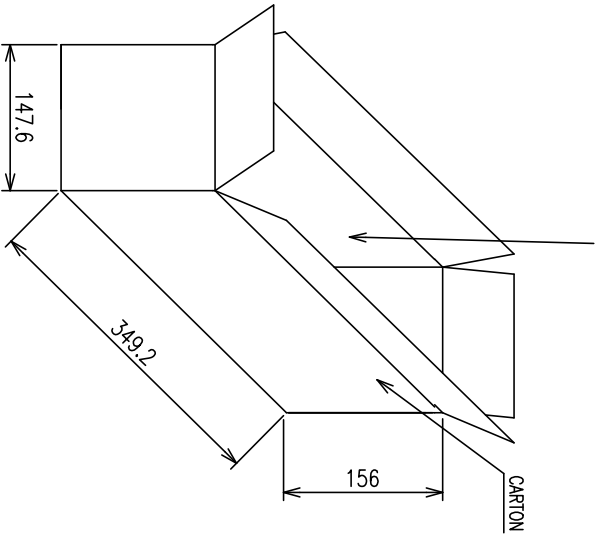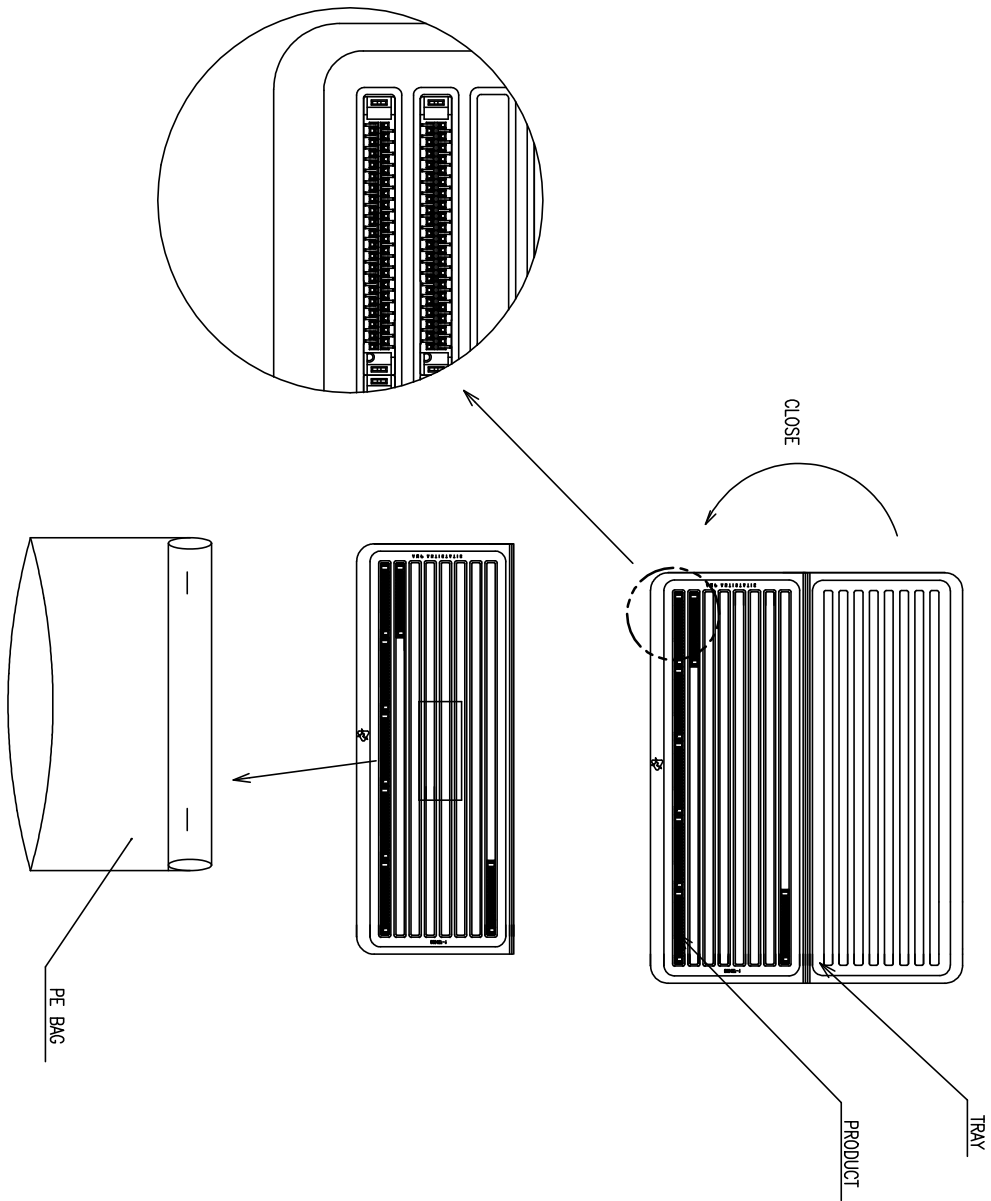

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:		TOLERANCES, UNLESS OTHERWISE SPECIFIED:
MM		
		0 PLC ± -
		1 PLC ± -
		2 PLC ± -
		3 PLC ± -
		4 PLC ± -
		ANGLES ± -
MATERIAL		

OBSOLETE							5-1734101-6	200
							3-1734101-6	
							1-1734101-6	
							5-1734101-5	
							3-1734101-5	
							1-1734101-5	
							5-1734101-4	
							3-1734101-4	160
							1-1734101-4	
							4-1734101-9	
OBSOLETE							6-1734101-9	80
							1734101-9	
					</			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1734101-3](#)