

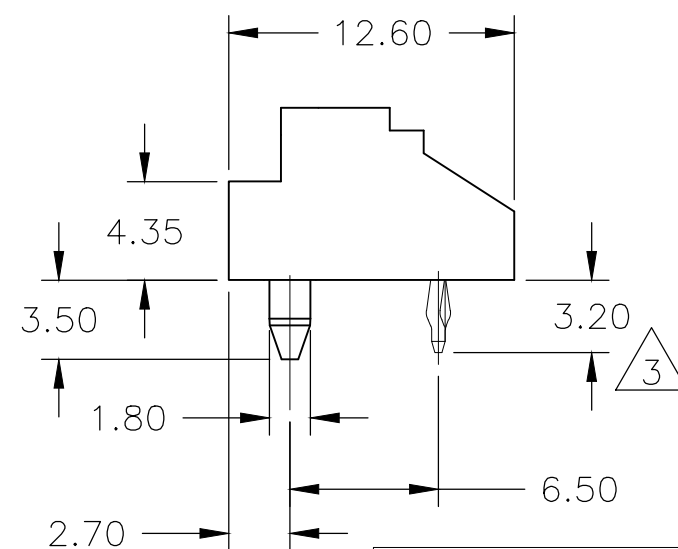
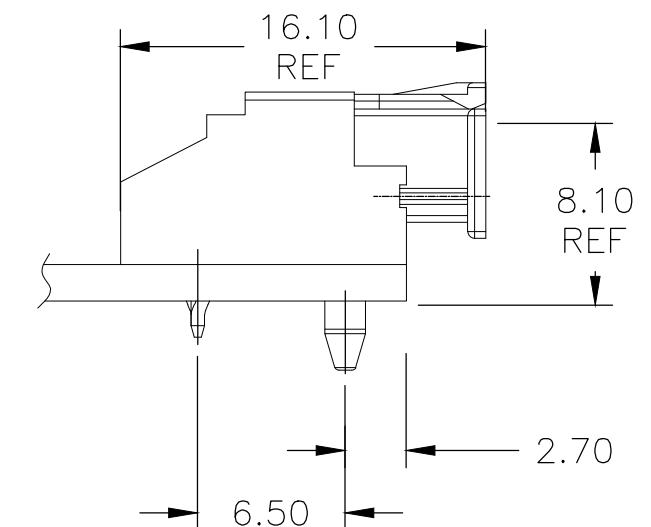


NOTES:		D2	REVISED PER ECR-18-013805	30AUG2018	W.H	D.Z
1	MATERIAL, HOUSING: NYLON 94VO, WHITE. CONTACT: COPPER ALLOY					
2	FINISH: CONTACT: BRIGHT TIN OVER NICKEL UNDERPLATED OVER ALL					
3	CONTACT SOLDERTAIL KINK DIRECTION(BOARDLOCK). OUTER POSITIONS KINK FRONT,INSIDE POSITION KINK BACK.					
4	COMPLY WITH GLOW WIRE REQUIREMENTS FOR PARTS OF NON-METALLIC MATERIAL SUPPORTING A CURRENT-CARRYING CONNECTION DETAILED IN IEC 60335-1, SECTION 30(GWT)					
5	OMIT SECOND PIN					

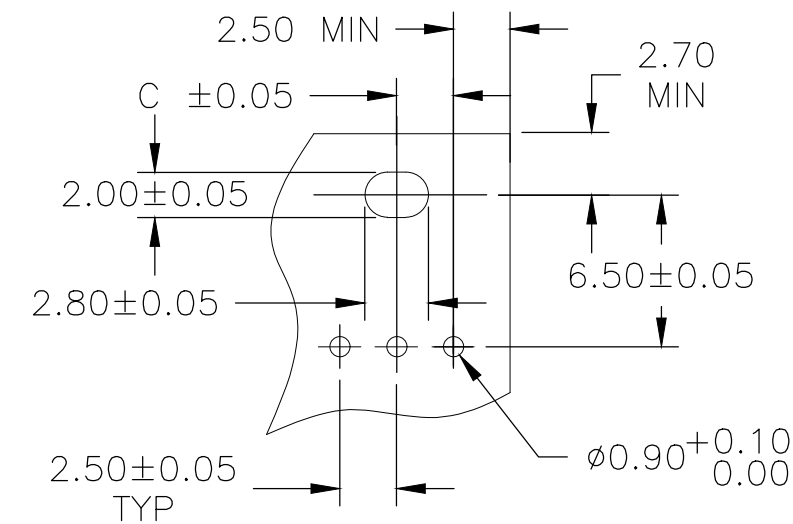

RECOMMENDED PCB LAYOUT

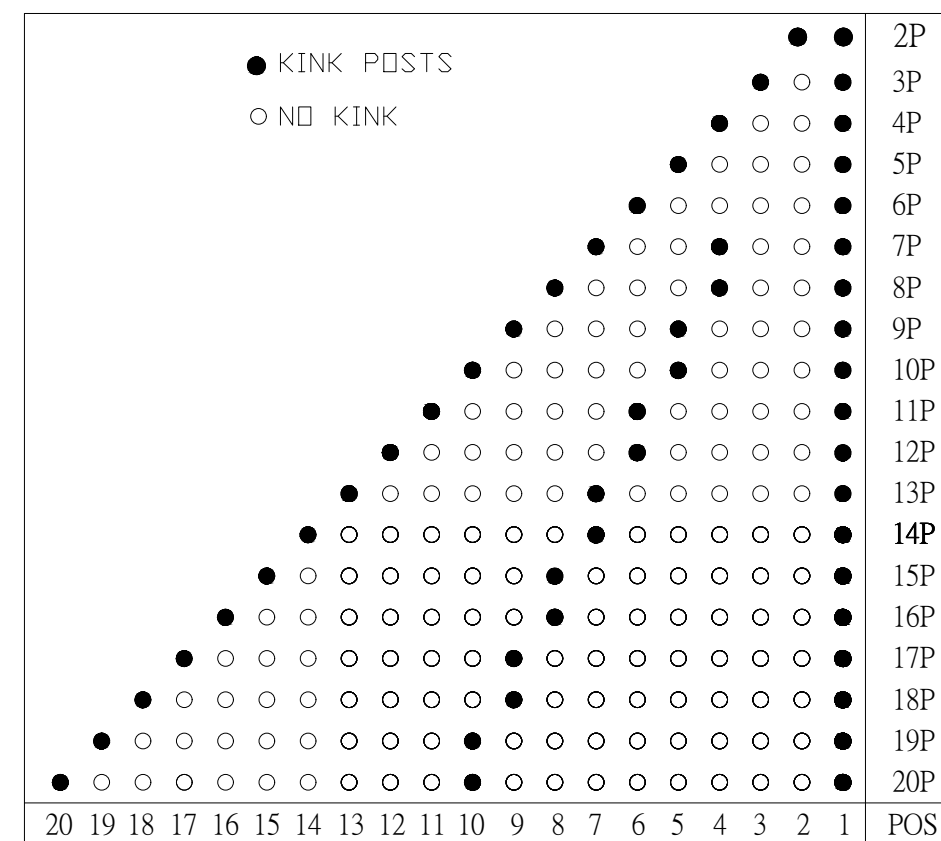

Position of kink

5	2.50	5.00	10.00	3	3-1744426-3
	31.25	47.50	52.50	20	2-1744426-0
	28.75	45.00	50.00	19	1-1744426-9
	26.25	42.50	47.50	18	1-1744426-8
	23.75	40.00	45.00	17	1-1744426-7
	21.25	37.50	42.50	16	1-1744426-6
	18.75	35.00	40.00	15	1-1744426-5
	16.25	32.50	37.50	14	1-1744426-4
	15.00	30.00	35.00	13	1-1744426-3
	13.75	27.50	32.50	12	1-1744426-2
	12.50	25.00	30.00	11	1-1744426-1
	11.25	22.50	27.50	10	1-1744426-0
	10.00	20.00	25.00	9	1744426-9
	8.75	17.50	22.50	8	1744426-8
	7.50	15.00	20.00	7	1744426-7
	6.25	12.50	17.50	6	1744426-6
	5.00	10.00	15.00	5	1744426-5
	3.75	7.50	12.50	4	1744426-4
	2.50	5.00	10.00	3	1744426-3
	1.25	2.50	7.50	2	1744426-2
DIM C	DIM B	DIM A	POS	PART NO.	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1744426-6](#)