

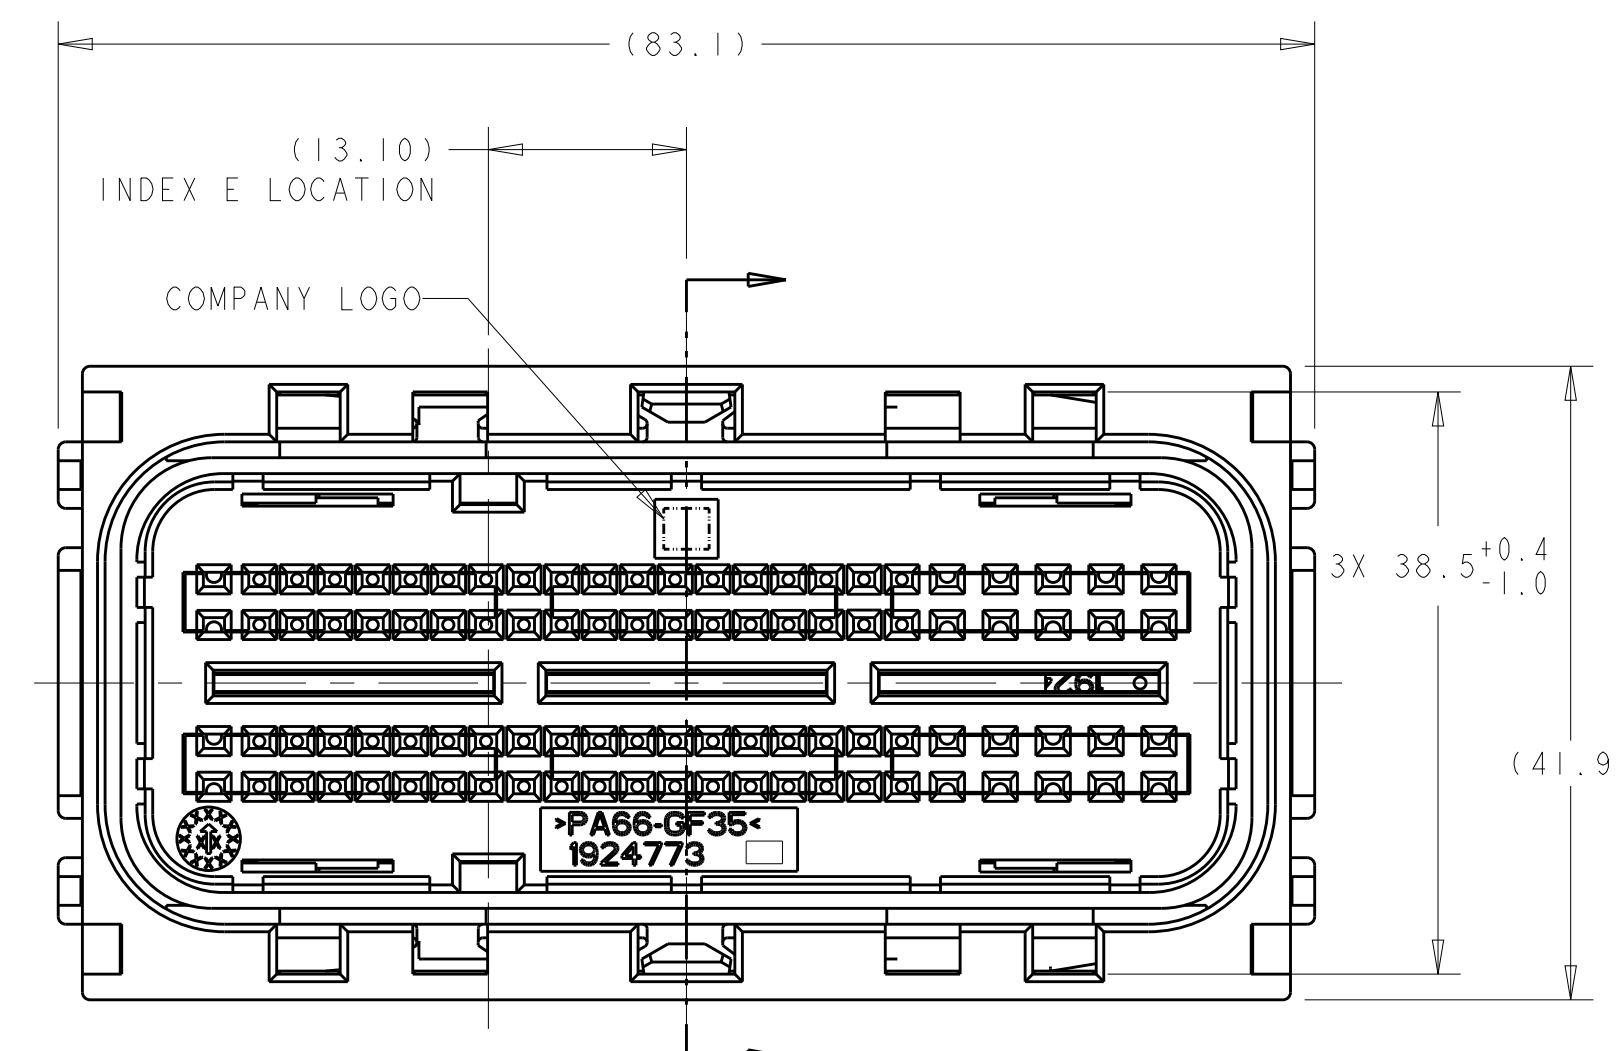


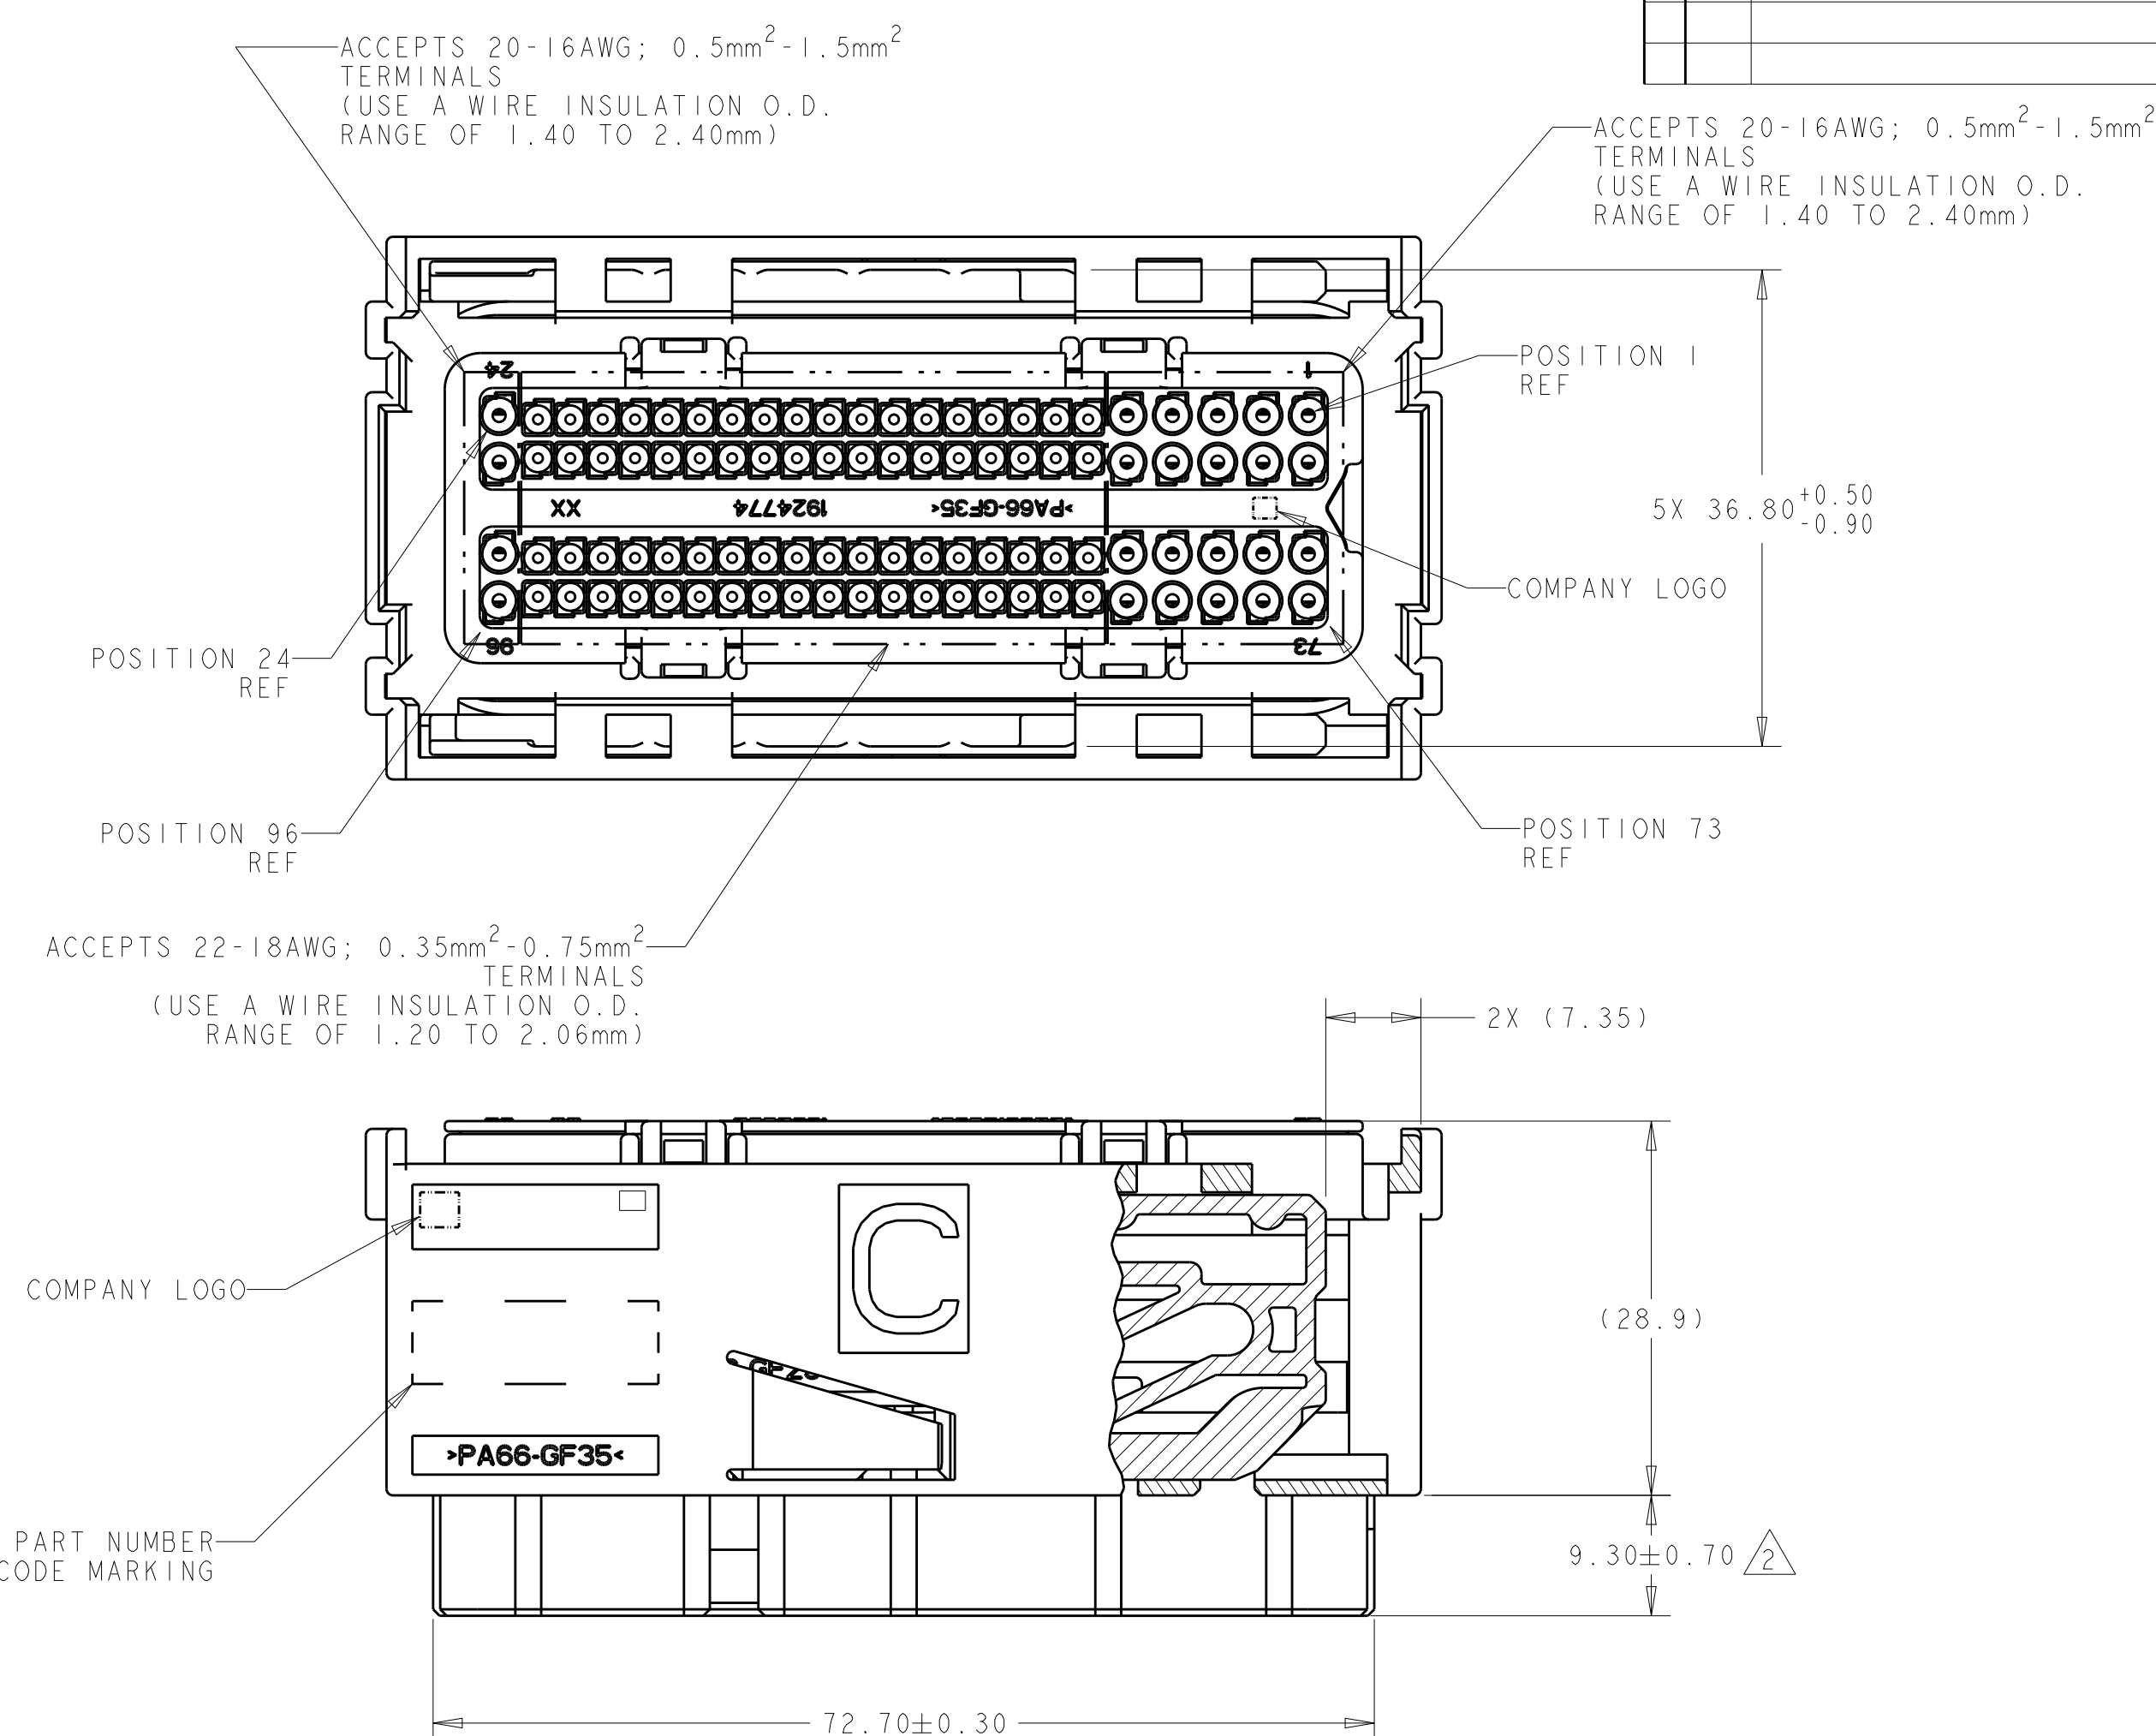

7. WIRE DRESS ASSEMBLY MUST BE INSTALLED ONTO PLUG ASSEMBLY WITH LEVER IN LOCKED POSITION.
8. APPLICATION SPEC'S: 408-10229, 408-10230.
9. NOTE DELETED.
10. FORCE TO SEAT TPA COMPONENT FROM PRE-SET TO LOCKED (FULLY LOADED W/ TERMINALS) TO BE 83N MAX.
11. FORCE TO MOVE TPA FROM FULLY LOCKED TO PRE-SET TO BE 115N MAX. FLAT BLADE SCREWDRIVER SUGGESTED FOR REMOVAL OF TPA.

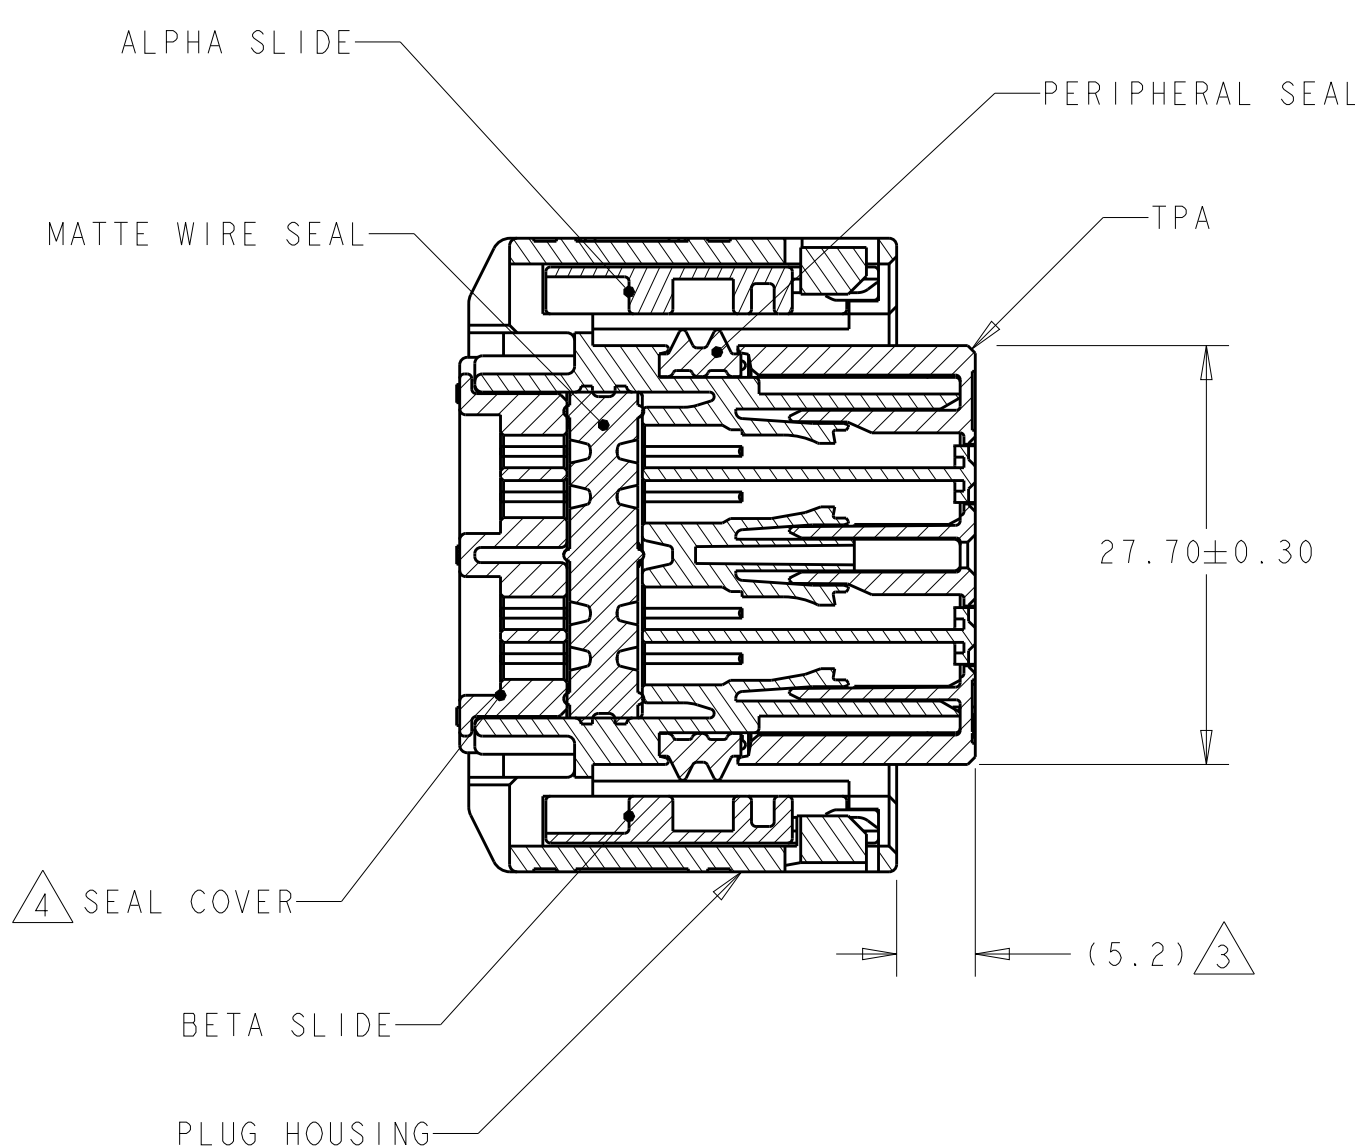

ALL CLOSED	BROWN	E	9-1924943-9
SEE TABLE, SH 2	BROWN	E	1-1924943-8
SEE TABLE, SH 2	BROWN	E	1-1924943-7
SEE TABLE, SH 2	BROWN	E	1-1924943-6
SEE TABLE, SH 2	BROWN	E	1-1924943-5
SEE TABLE, SH 2	BROWN	E	1-1924943-4
SEE TABLE, SH 2	BROWN	E	1-1924943-3
SEE TABLE, SH 2	BROWN	E	1-1924943-2
SEE TABLE, SH 2	BROWN	E	1-1924943-1
SEE TABLE, SH 2	BROWN	E	1924943-9
SEE TABLE, SH 2	BROWN	E	1924943-8
SEE TABLE, SH 2	BROWN	E	1924943-7
SEE TABLE, SH 2	BROWN	E	1924943-6
SEE TABLE, SH 2	BROWN	E	1924943-5
SEE TABLE, SH 2	BROWN	E	1924943-4
SEE TABLE, SH 2	BROWN	E	1924943-3
SEE TABLE, SH 2	BROWN	E	1924943-2
ALL OPEN	BROWN	E	1924943-1
BLOCKED CIRCUITS	TPA COLOR	INDEX REF	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWG 29NOV007 CDR J. D. HARDY CHK A. J. VASBINDER APP'D A. J. VASBINDER		COLOR REF	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±.01 1 PLC ±.02 2 PLC ±.03 3 PLC ±.04 4 PLC ±.05 ANGLES ±.1°		NAME PLUG ASSEMBLY, 96 POSITION, INDEX E - RIGHT EXIT, SEALED, GPEC II	
		PRODUCT SPEC TBD		APPLICATION SPEC 	
MATERIAL 		FINISH 		SIZE A1	
WEIGHT CUSTOMER DRAWING		CASE CODE 00779		DRAWING NO C-1924943	
SCALE 2:1		SHEET 1 of 2		REV C	

8		7		6		5		4		3		2		1	
THIS DRAWING IS UNPUBLISHED.				RELEASED FOR PUBLICATION				20							
© COPYRIGHT 20				BY -				ALL RIGHTS RESERVED.							

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1924943-1](#)