


- 1 MATERIAL -NATURAL, 6 NYLON, 150°C, V0
- 2 MATERIAL -BLACK, 6 NYLON, 150°C, V0
- 3 MATERIAL -NATURAL, 66 NYLON, V2, GLOW WIRE MATERIAL
- 4 MATERIAL - NATURAL 66 NYLON V0, GLOW WIRE MATERIAL
- 5 IF CRACKS IN THE LIVING HINGE ARE OBSERVED DURING CLOSING THE LID, THIS IS AN INDICATION THAT THE PARTS HAVE BEEN ALLOWED TO DRY-OUT TOO MUCH. RE-MOISTURIZE THE PARTS PER SPECIFICATION 408-143119.

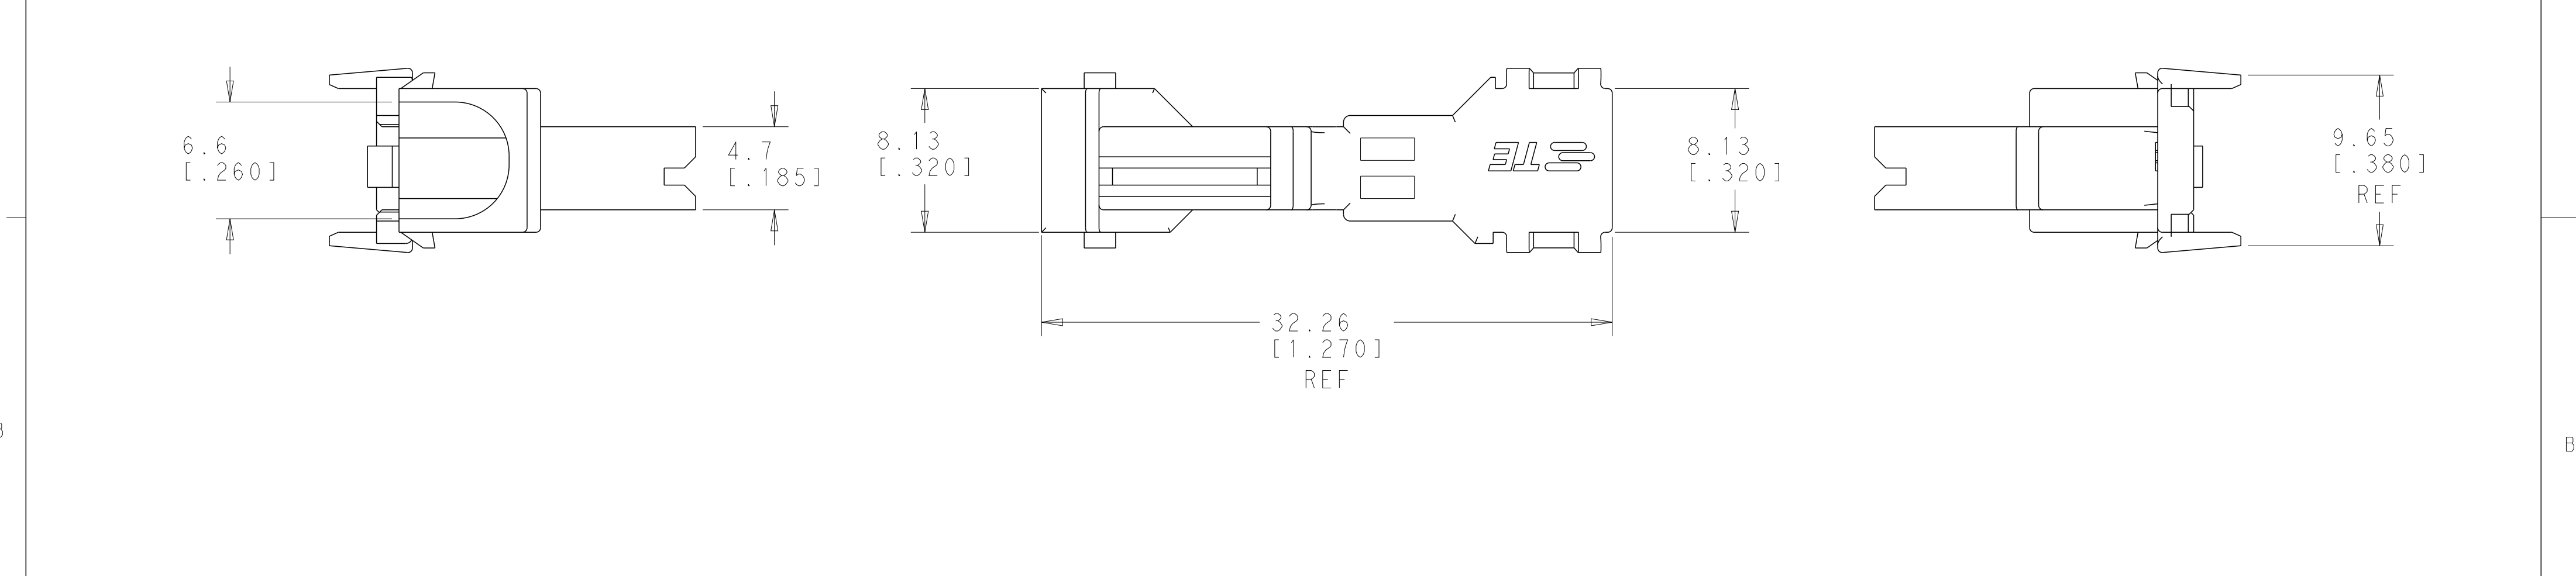

Isometric view of the receptacle assembly showing the housing, receptacle, flag, and faston.

SUPERSEDED BY 1969507-9

4	1969507-9
3	1969507-4
2	1969507-3
1	1969507-2
MATERIAL	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	JR RUTH03APR12		TE Connectivity				
DIMENSIONS: mm[INCHES]		CHK	PETE DESANTIS03APR12						
		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	NAME				
		0 PLC ±- 1 PLC ±- 2 PLC ±0.38 [.015] 3 PLC ±- 4 PLC ±- ANGLES ±- FINISH		PETE DESANTIS03APR12					
MATERIAL		PRODUCT SPEC		APPLICATION SPEC		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
SEE TABLE		WEIGHT		CUSTOMER DRAWING		A200779		C=1969507	-
						SCALE	4:1	SHEET	1 OF 1
						REV B7			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1969507-4](#)