

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION20

© COPYRIGHT 20BY -ALL RIGHTS RESERVED.






LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
AF	-		A1	REVISED PER ECR-14-004708	28MAR14	JR	KR

D

C

B

A

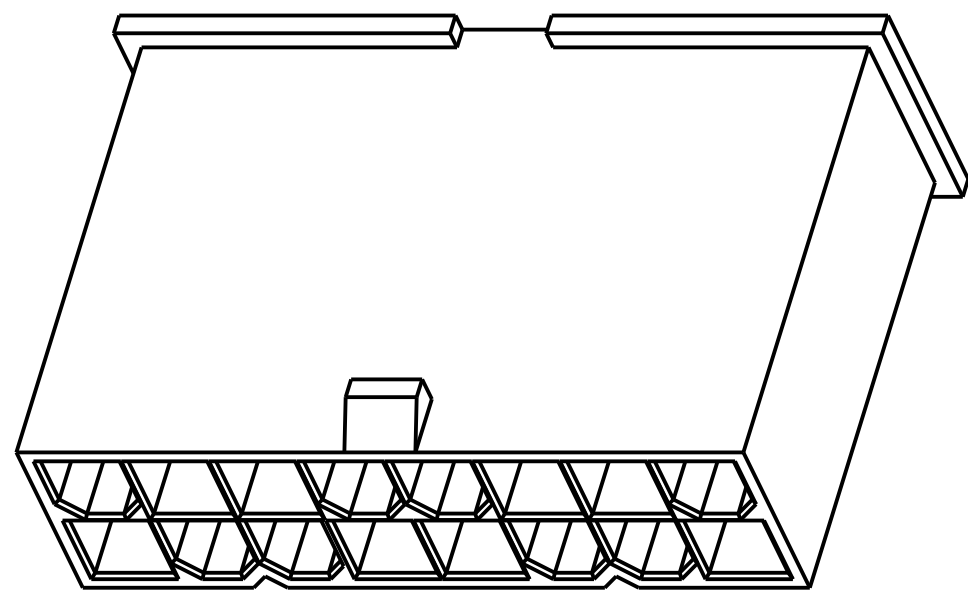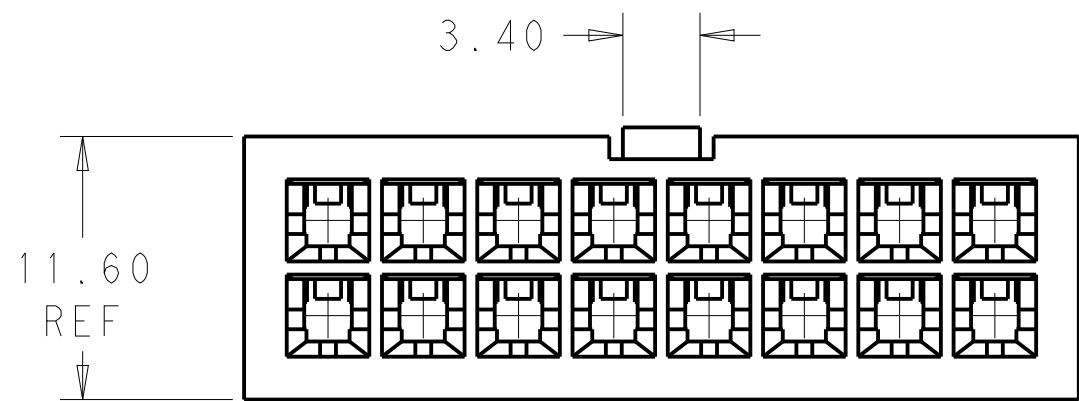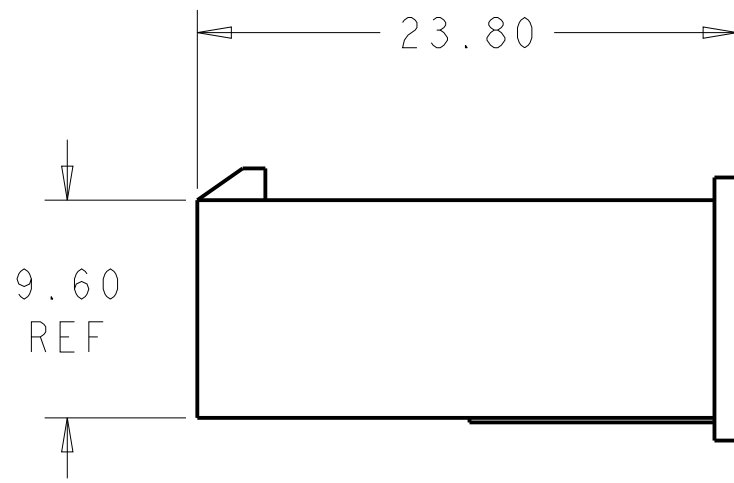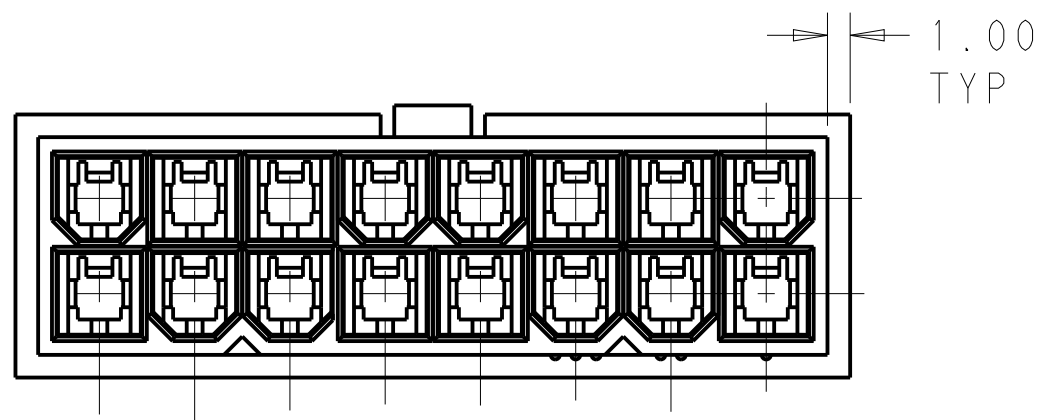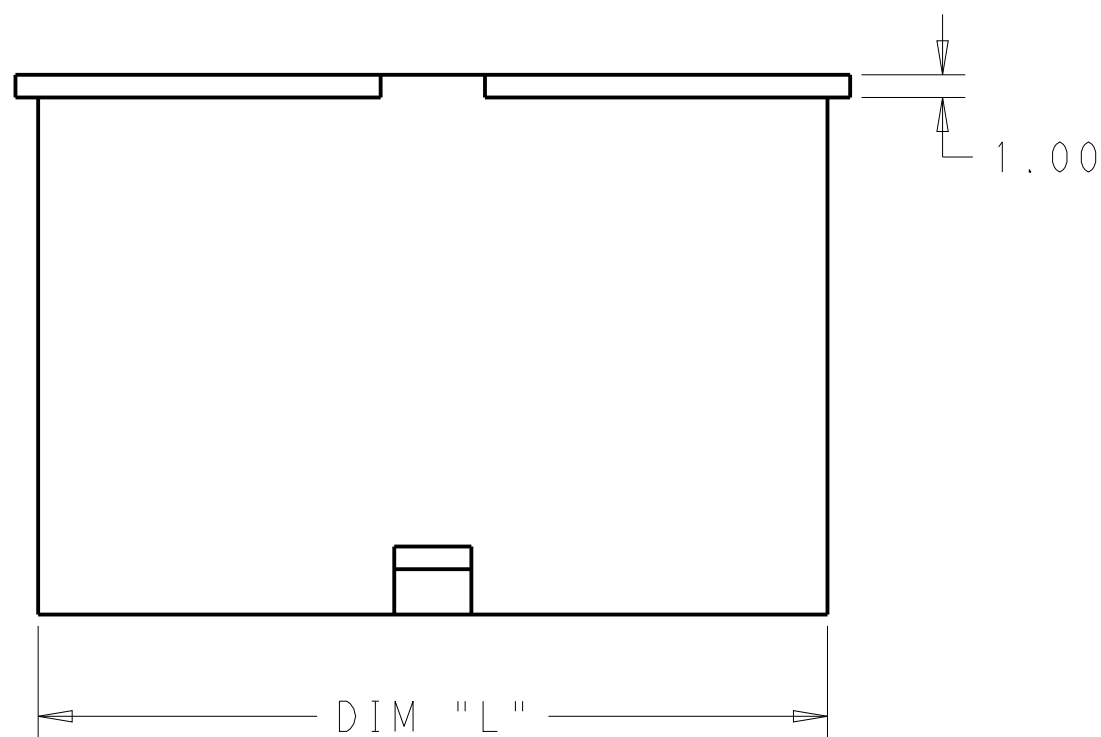

- 1 POLYAMIDE, UL94V-2, COLOR- WHITE
- 2 FLAMMABILITY V2 FOR THICKNESS 0.38mm, 1.5mm NAD 3.0mm PER IEC 60695-11-10.
- 3 GLOW-WIRE FLAMMABILITY (GWFI) 800°C FOR THICKNESS 0.38mm AND 0.75mm PER IEC 60695-2-12.
- 4 GLOW-WIRE FLAMMABILITY (GWFI) 960°C FOR THICKNESS 1.5mm AND 3.0mm PER IEC 60695-2-12.
- 5 GLOW-WIRE IGNITION (GWIT) 825°C FOR THICKNESS 0.38mm, 0.75mm, 1.5mm AND 3.0mm PER IEC 60695-2-13.
- 6 COMPLY WITH GLOW WIRE REQUIREMENTS FOR PARTS OF NON-METALLIC MATERIAL SUPPORTING A CURRENT-CARRYING CONNECTION DETAILED IN IEC 60335-1, SECTION 30(GWT).

D

C

B

A

51.60	24	2-1969604-4
47.40	22	2-1969604-2
43.20	20	2-1969604-0
39.00	18	1-1969604-8
34.80	16	1-1969604-6
30.60	14	1-1969604-4
26.40	12	1-1969604-2
22.20	10	1-1969604-0
18.00	8	1969604-8
13.80	6	1969604-6
9.60	4	1969604-4
5.40	2	1969604-2
DIM L	NO. OF POS	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN JR RUTH 26SEPT13	TE Connectivity			
DIMENSIONS:		CHK KURT RANDOLPH 26SEPT13				
mm		APVD KURT RANDOLPH 26SEPT13	NAME PLUG HOUSING VAL-U-LOK, GLOW WIRE			
		PRODUCT SPEC	SIZE			
		APPLICATION SPEC	CAGE CODE			
MATERIAL		WEIGHT	DRAWING NO			
		Customer Drawing	A200779			
			C-1969604			
			RESTRICTED TO			
			SCALE 3:1			
			SHEET 1 OF 1			
			REV A1			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1969604-8](#)