

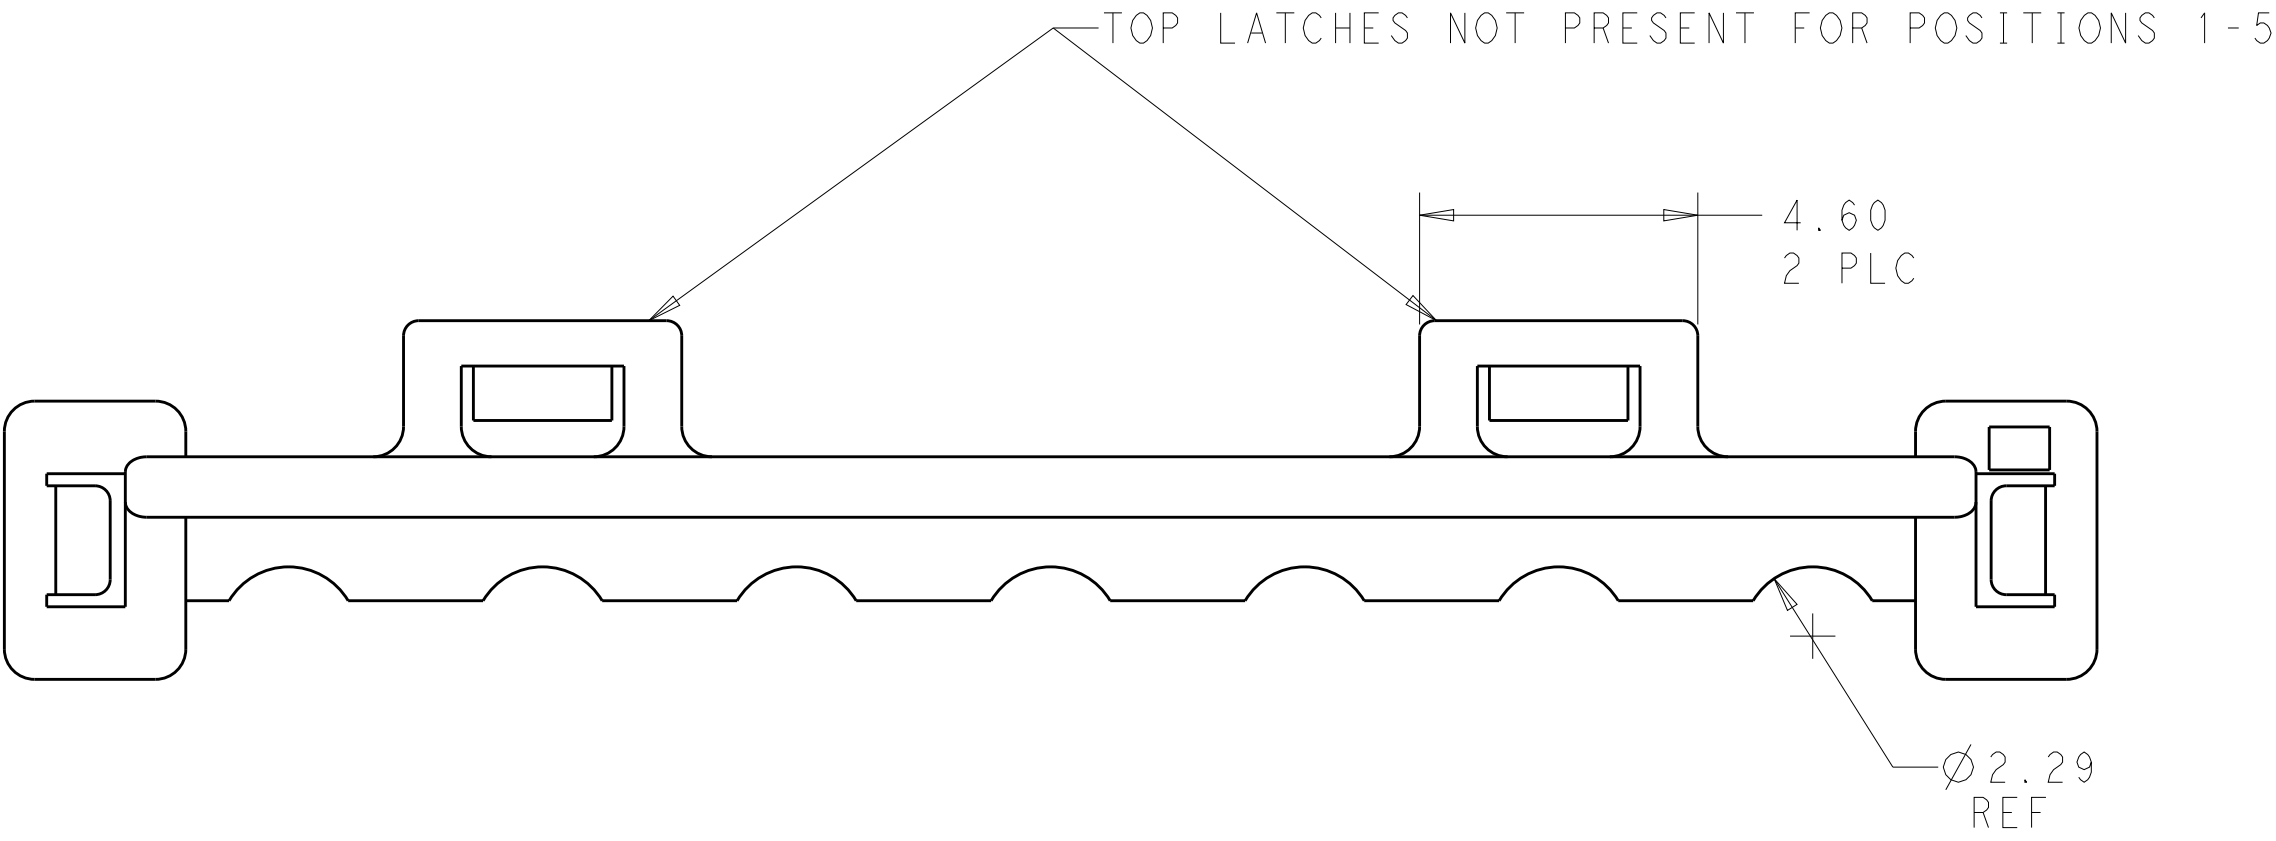


LOC	DIST	REVISIONS						
		P	LTR	DESCRIPTION	DATE	DWN	APVD	
AF	-		A2	REVISED PER ECR-16-017699	12JAN2017	JJ	DZ	

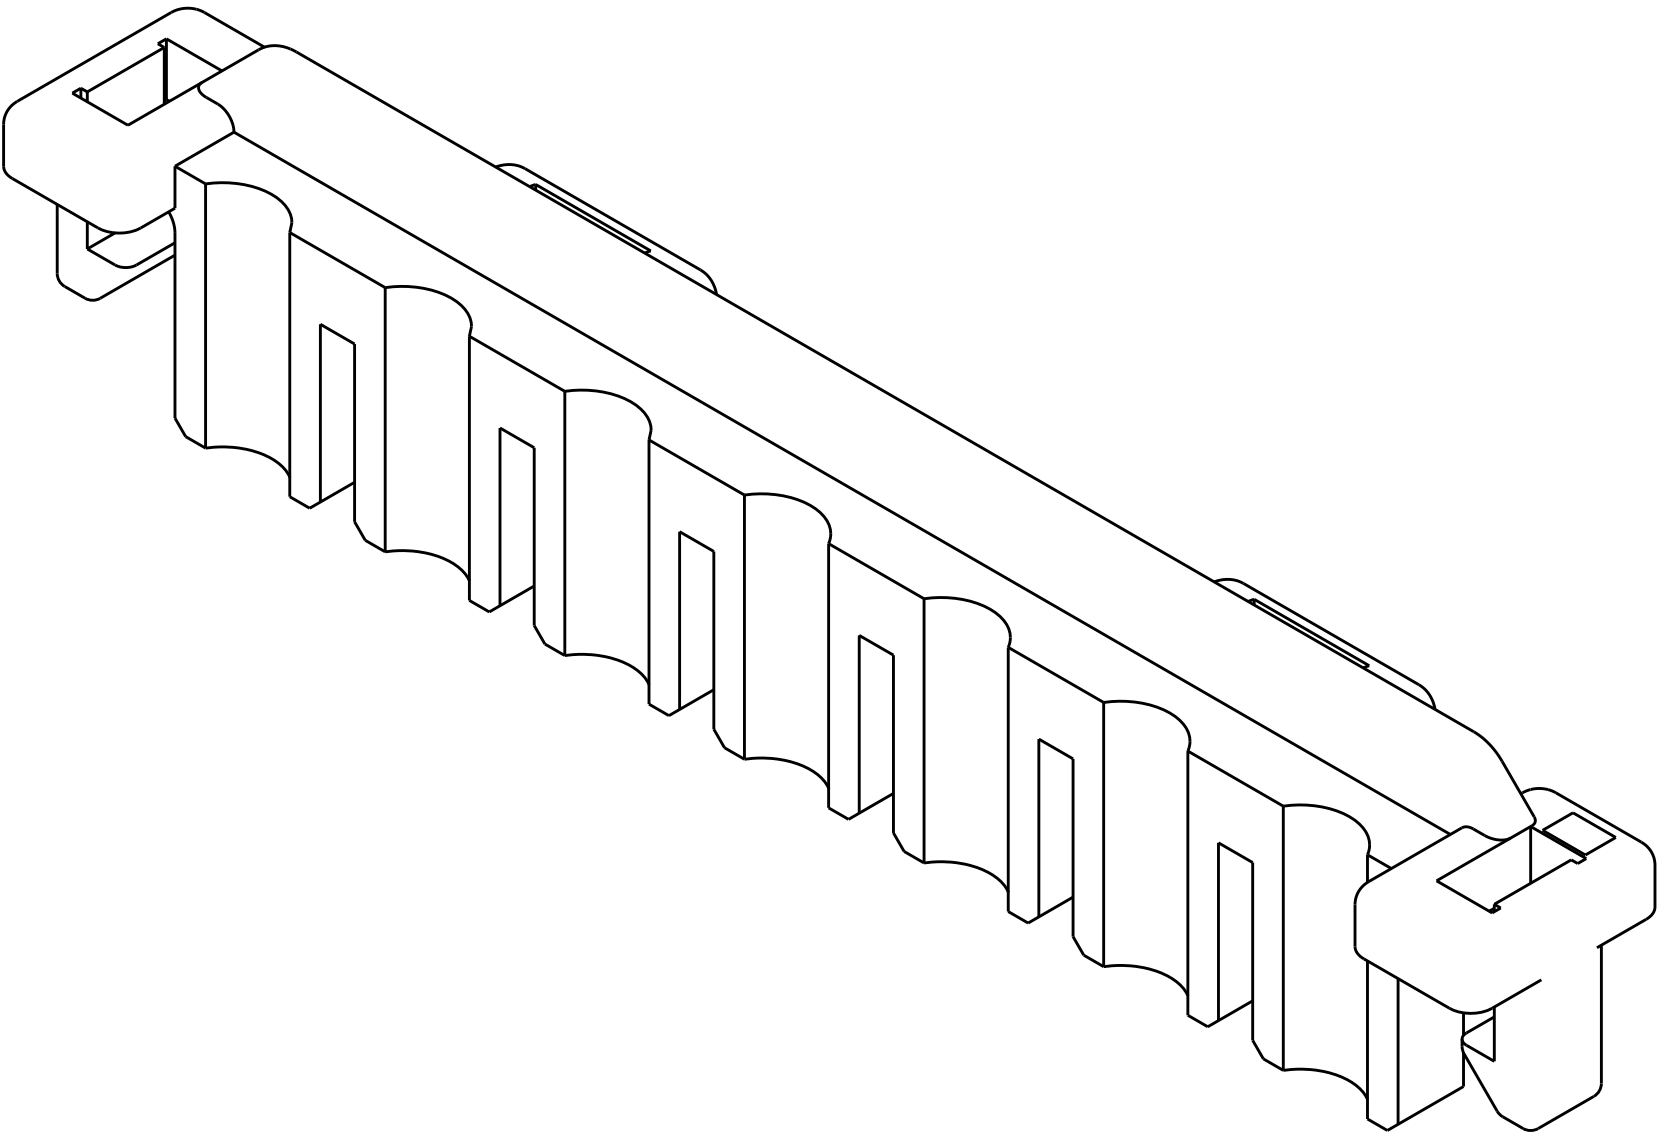

1. USE WITH VAL-U-LOK HOUSINGS.
2. FOR USE WITH #26-#22 AWG LEAD WIRE WITH INSULATION DIA 2.03-2.16MM AND INSULATION CRIMP HEIGHT OF 2.54 MIN.
- 3 SIDE LATCHES ONLY, NO TOP LATCHES FOR POSITIONS 1-5

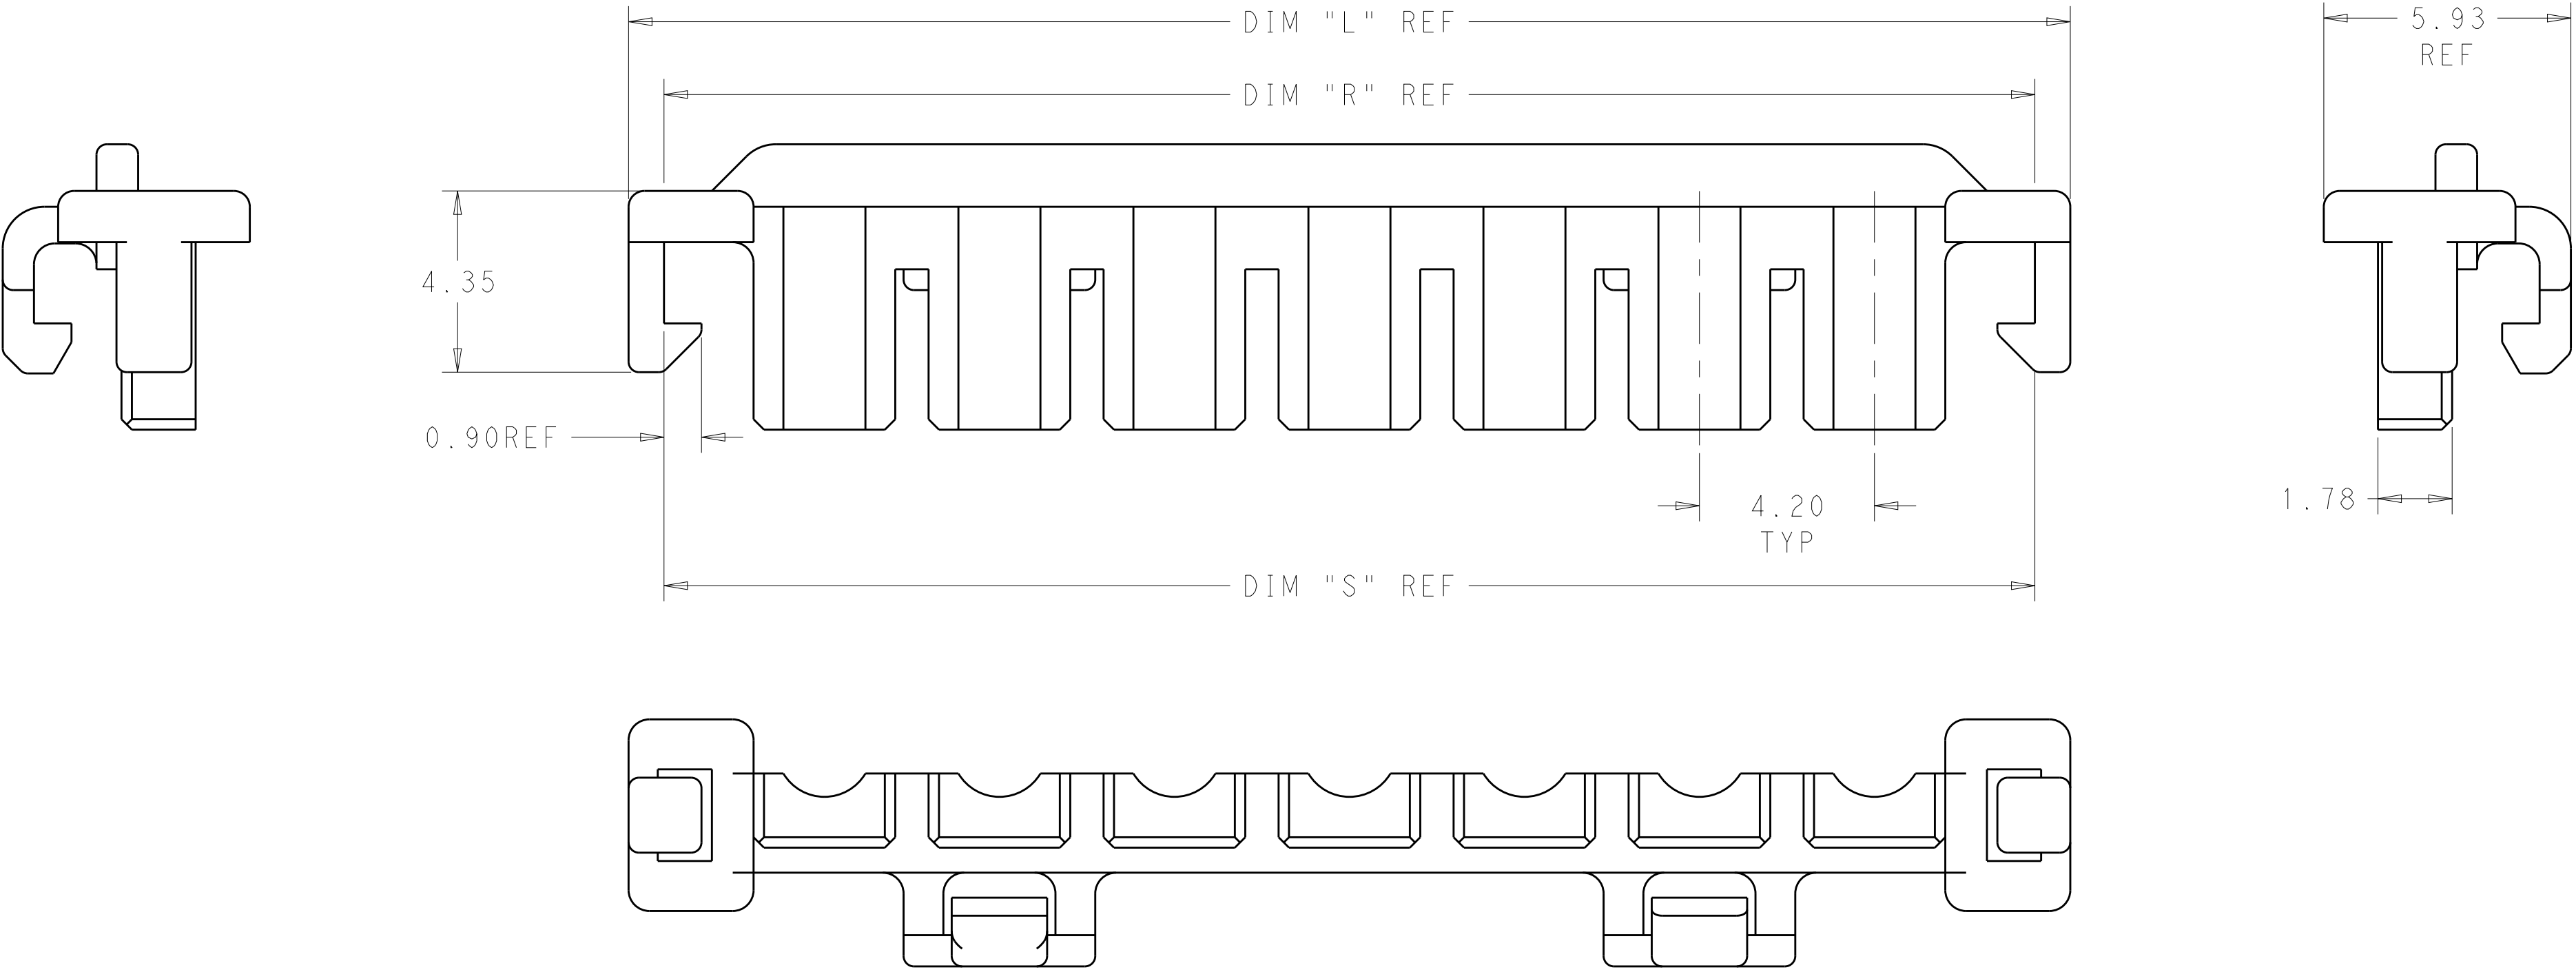

1969609-7 SHOWN HERE

53.94	53.90	55.60	12	1-1969609-2
49.74	49.70	51.40	11	1-1969609-1
45.54	45.50	47.20	10	1-1969609-0
41.34	41.30	43.00	9	1969609-9
37.14	37.10	38.80	8	1969609-8
32.94	32.90	34.60	7	1969609-7
28.74	28.70	30.40	6	1969609-6
24.54	24.50	26.20	5	1969609-5 3
20.34	20.30	22.00	4	1969609-4 3
16.14	16.10	17.80	3	1969609-3 3
11.94	11.90	13.60	2	1969609-2 3
7.74	7.70	9.40	1	1969609-1 3
DIM S	DIM R	DIM L	# OF POS	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. EDWARDS 08JAN2013	 TE Connectivity		
DIMENSIONS:		CHK KURT RANDOLPH 08JAN13			
mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD KURT RANDOLPH 08JAN13	NAME		
		PRODUCT SPEC			
	0 PLC ±.3 1 PLC ±0.3 2 PLC ±0.1 3 PLC ±0.001 4 PLC ±0.0001 ANGLES ±.1	APPLICATION SPEC	HOUSING, TPA, VAL-U-LOK		
		FINISH			
MATERIAL NYLON 6/6		WEIGHT -	SIZE CAGE CODE DRAWING NO		
COLOR: RED		Customer Drawing	A100779C=1969609		
		SCALE 8:1	SHEET 1 OF 1		
			REV A2		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1969609-8](#)