



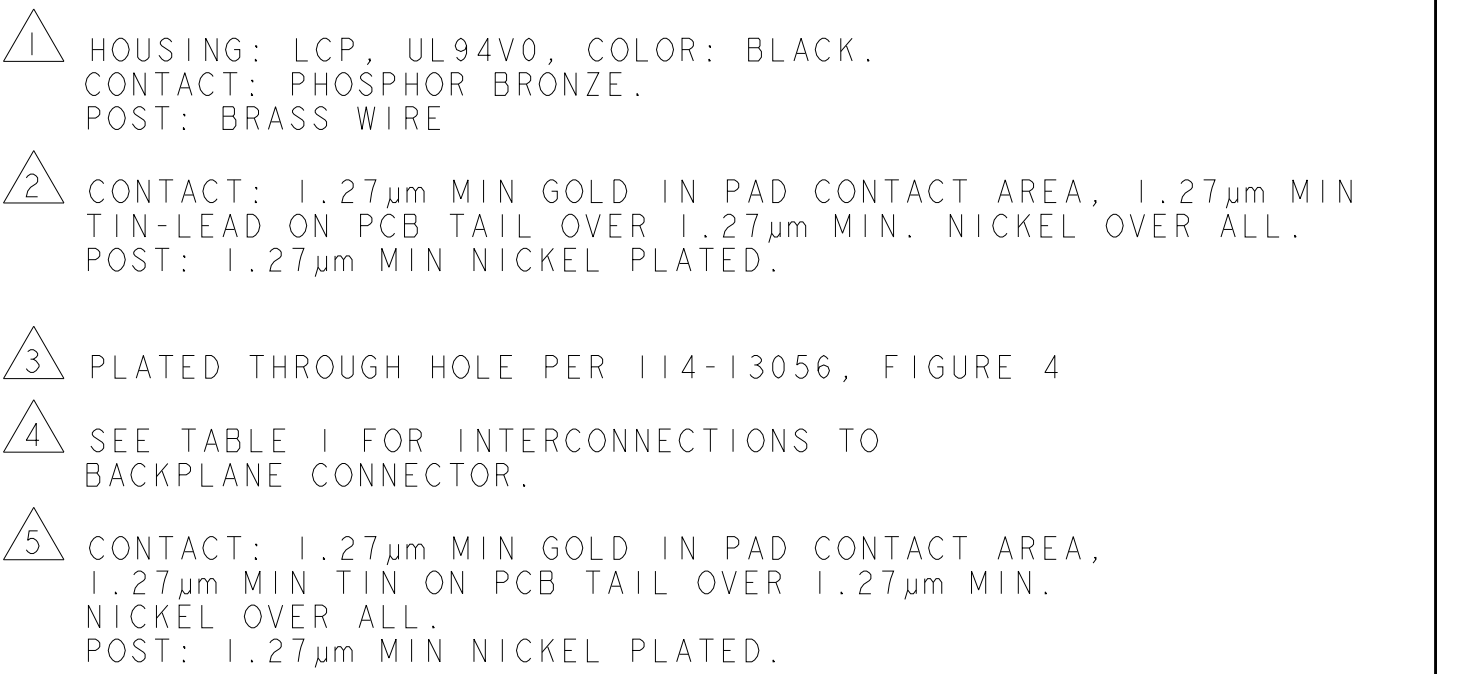

TYPICAL INTERCONNECTIONS FOR EACH COLUMN (WAFER): 1, 2, 3, 4, 5, 6, 7, 8		
CONTACT USAGE	DAUGHTERCARD CONNECTOR PIN	BACKPLANE CONNECTOR PIN
SIGNAL	ax	bx
SIGNAL	bx	cx
SIGNAL	dx	ex
SIGNAL	fx	gx
SIGNAL	gx	hx
GROUNDS	cx, ex, (ALL COMMONED)	ax, dx, fx, ix

NOTE: "x" DESIGNATES THE COLUMN NUMBER

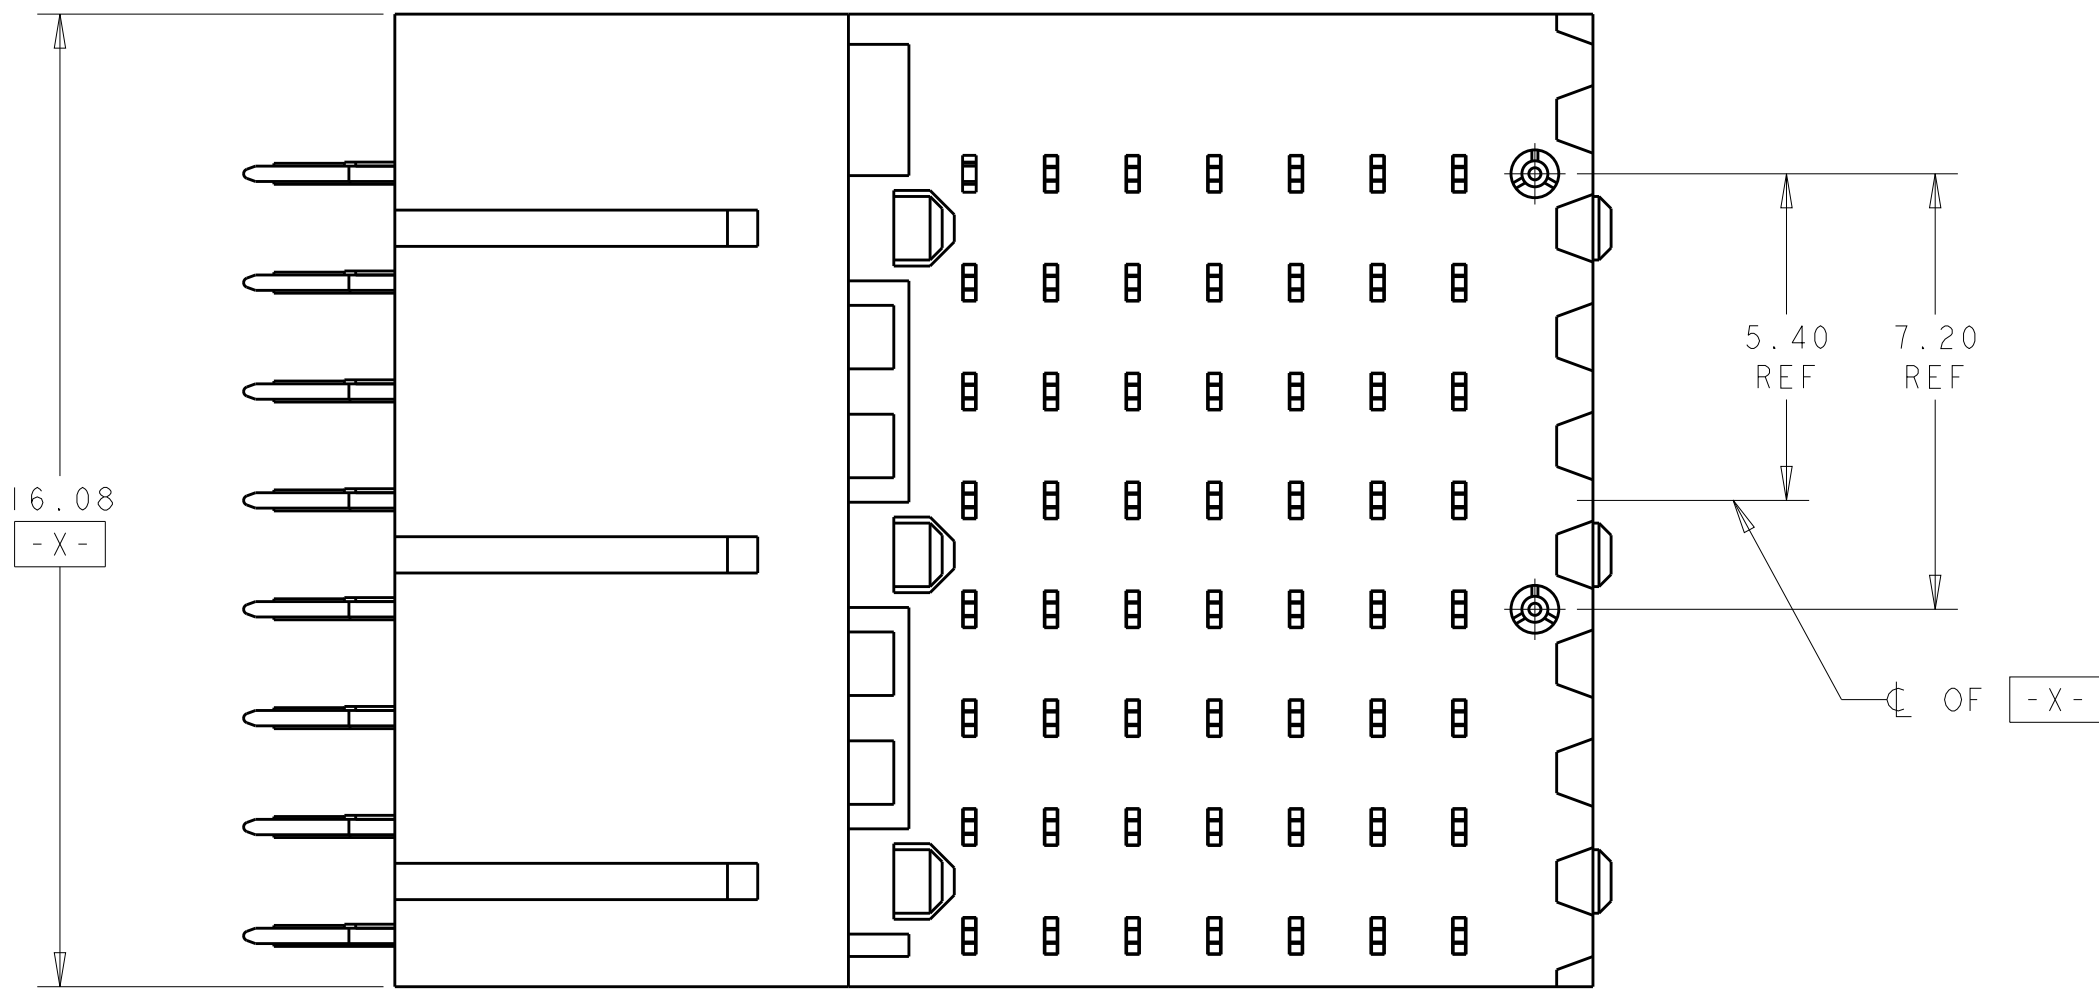

	2102848-2
	2102848-1
PLATING	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. MILLER	29NOV2011	 TE Connectivity
DIMENSIONS:		CHP K. THACKSTON	12JAN2012	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD M. McALONIS	25SEP2012	
mm	0 PLC ±. 1 PLC ±.5 2 PLC ±.10 3 PLC ±. 4 PLC ±. ANGLES ±1° 0'	NAME PLUG ASSY, 7 ROW, SE, 20.3mm, HALF LEFT END, 20.3mm, MULTIGIG RT 2-R DAUGHTERCARD CONNECTOR, VITA 46		
	PRODUCT SPEC 108-2012 APPLICATION SPEC 114-13056	SIZE CASE CODE DRAWING NO RESTRICTED TO A 100779 ©=2102848 -		
MATERIAL	FINISH	WEIGHT	Customer Drawing	
	SEE TABLE	5.41g	SCALE 8:1	SHEET 1 OF 1 REV C

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2102848-1](#)