


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
-	-		A	REVISED PER ECR-15-007373	31JUL2015	RS	DD
			A1	REVISED PER ECR-19-000093	08JAN2019	SR	DD

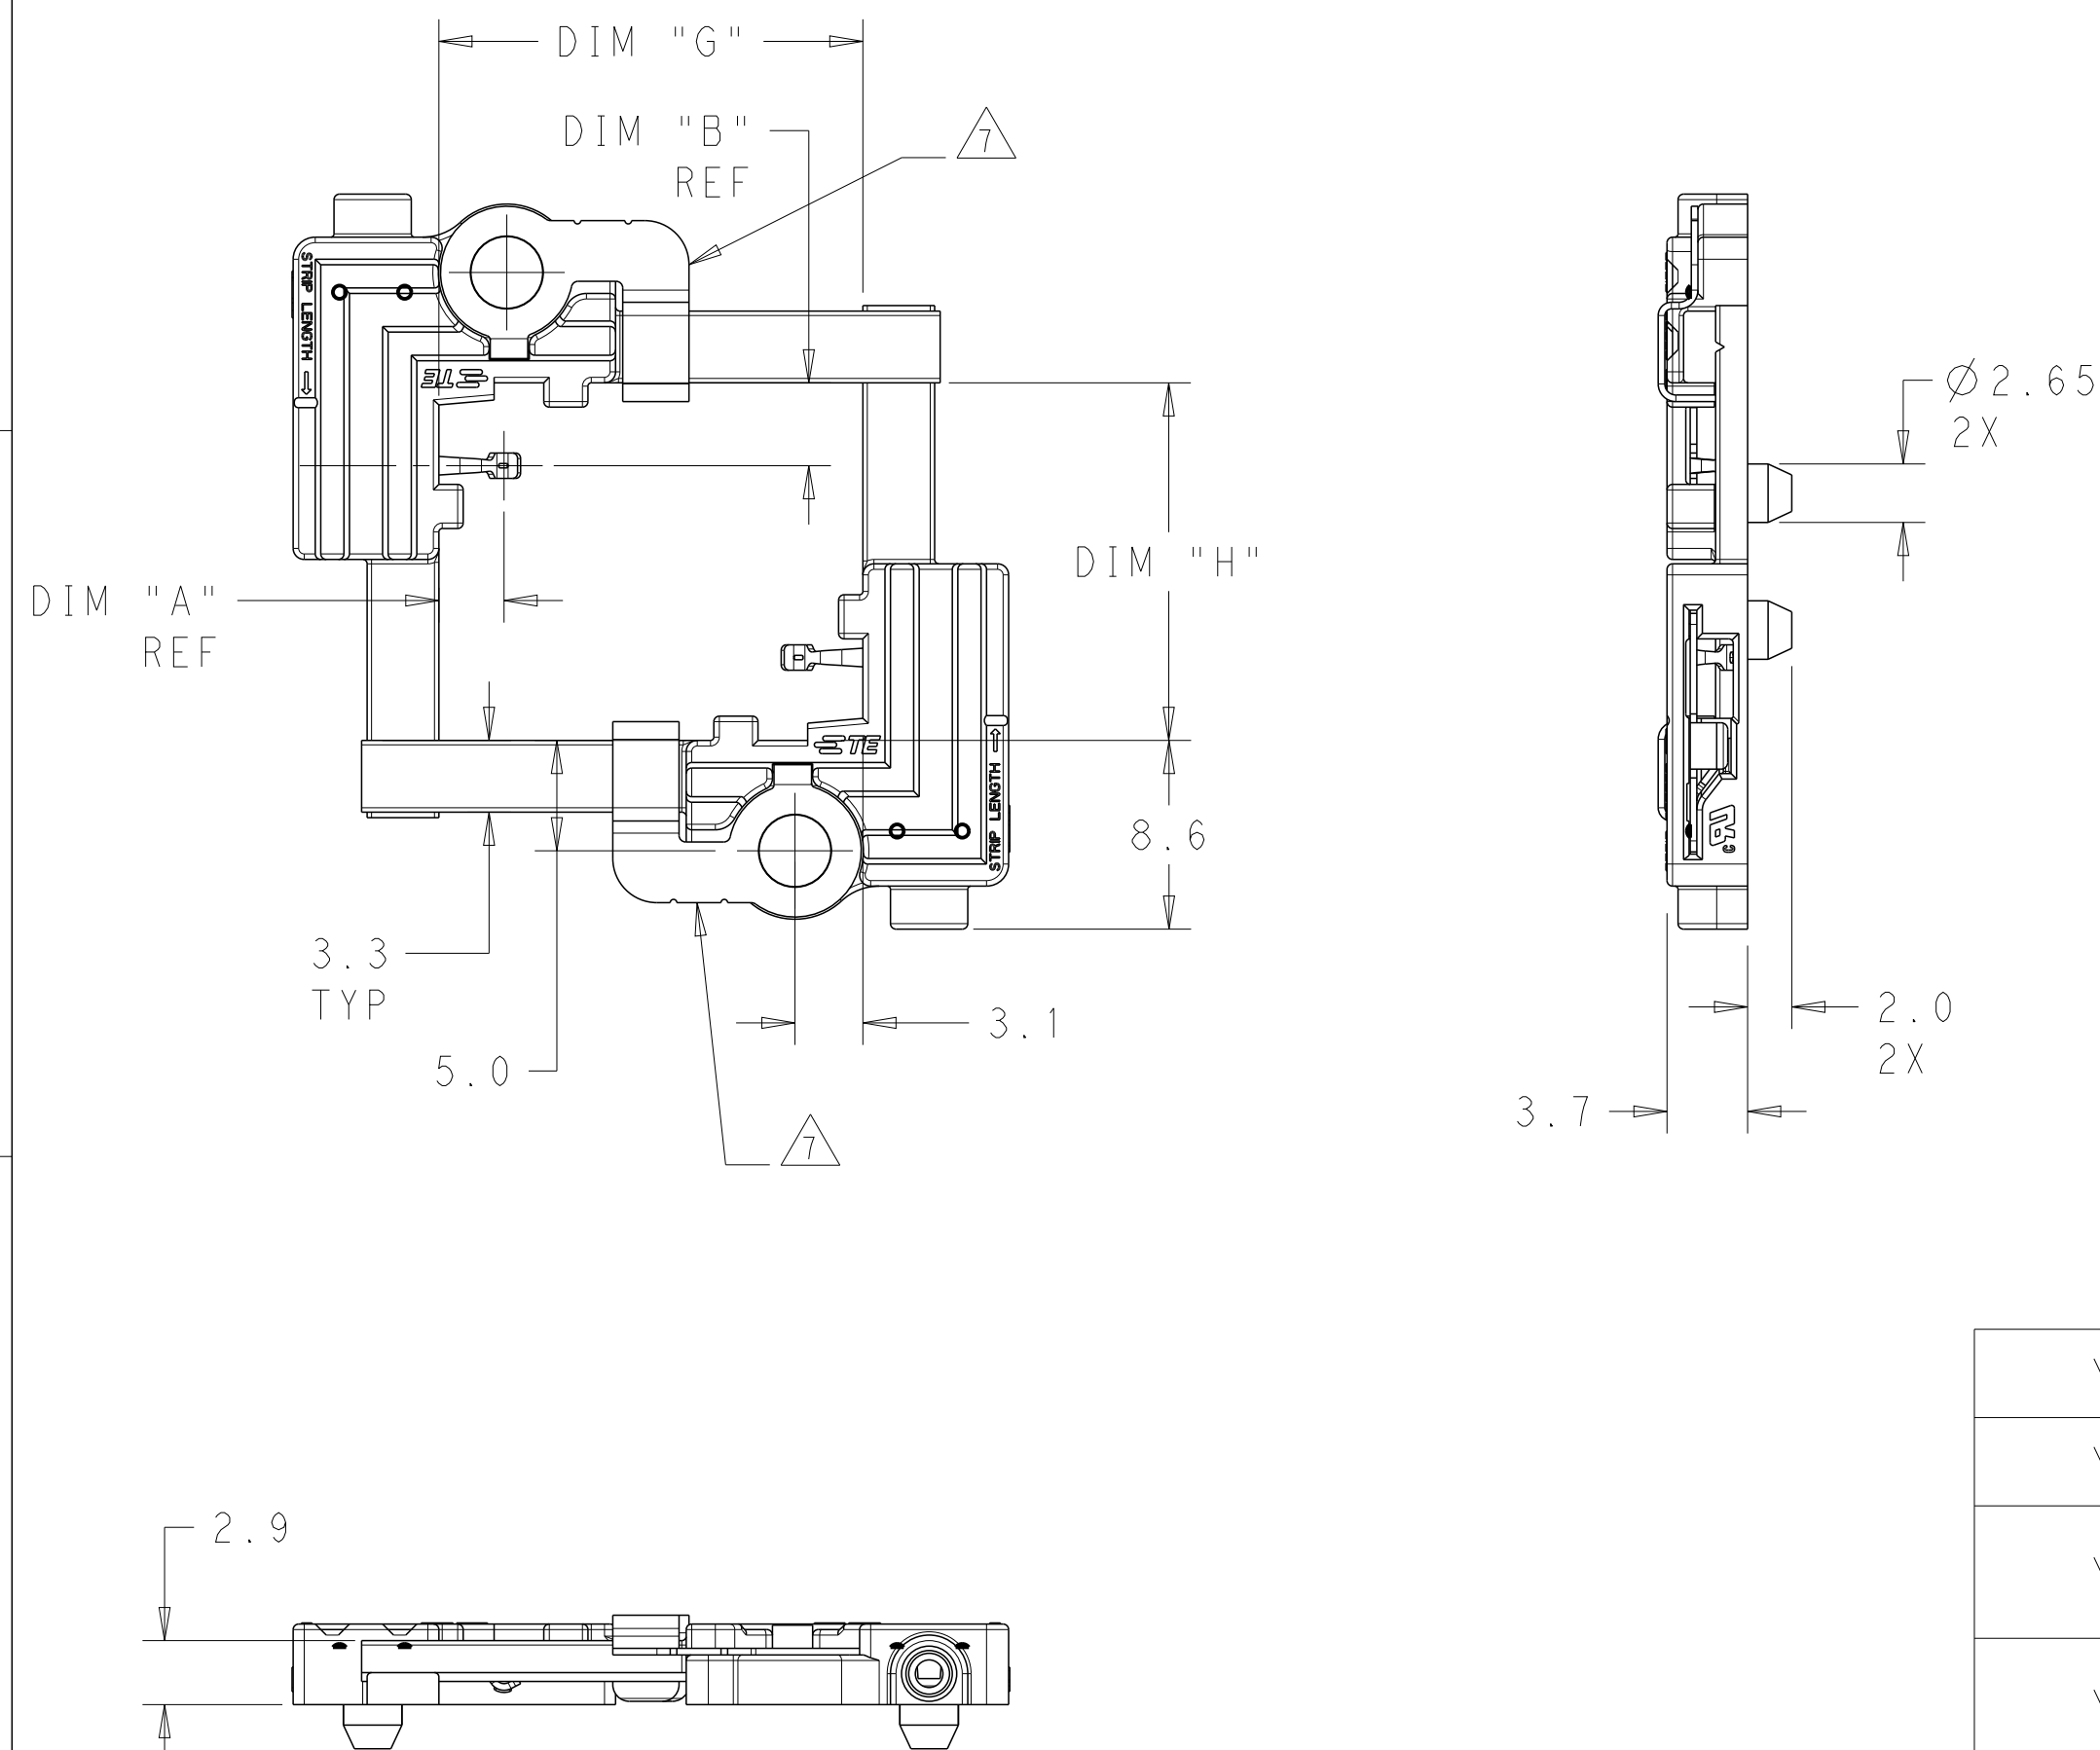


8. FOR COB-TO-HOLDER CROSS REFERENCE,
REFER TO APPLICATION SPECIFICATION 114-32208.

1. MATERIALS AND FINISH:
 - HOUSING: PBT-GF, COLOR: NATURAL
 - CONTACTS: COPPER ALLOY
 - FINISH: SEE TABLE
 - THERMAL SPRING: STAINLESS STEEL
2. MUST COMPLY WITH DIRECTIVE 2002/95/EC (ROHS)
3. REFER TO LED MANUFACTURER'S DATASHEET FOR LED DIMENSIONS
4. REFER TO LED DATASHEET FOR RECOMMENDED THERMAL INTERFACE MATERIALS
5. RECOMMENDED SCREW SIZE: M3 OR #4.
TORQUE SCREWS TO 2.5 in-lbf TO 4.0 in-lbf
6. WIRE TYPES AND SIZES ACCEPTED
 - 18, 20 AND 22 AWG SOLID WIRE
 - 18 AND 20 AWG PREBOND STRANDED WIRE
 - 18 AWG STRANDED WIRE (16 STRAND COUNT)
 - MAX INSULATION OD: 2.10 MM
 - STRIP LENGTH: 8.0±1.0

 IN APPLICATIONS WHERE THE LED SUBSTRATE IS LESS THAN 1.50MM THICK A THERMAL SPRING IS REQUIRED. AS NOTED IN THE TABLE THE THERMAL SPRINGS WILL BE INSTALLED PRIOR TO SHIPMENT FROM THE TE FACTORY.

YES	38.30	38.30	2.26	2.00	GOLD OVER NICKEL	6-2154874-4
YES	28.30	28.30	2.26	2.00	GOLD OVER NICKEL	6-2154874-3
YES	19.30	19.30	1.85	1.55	GOLD OVER NICKEL	6-2154874-2
YES	13.80	13.80	1.85	1.55	GOLD OVER NICKEL	6-2154874-1
YES	24.15	24.15	2.26	2.00	GOLD OVER NICKEL	5-2154874-3
YES	16.15	16.15	2.26	2.00	GOLD OVER NICKEL	5-2154874-2
NO	22.30	22.30	3.75	2.95	TIN OVER NICKEL	5-2154874-1
NO	25.45	22.45	2.26	2.00	TIN OVER NICKEL	3-2154874-2
△ THERMAL SPRING	DIM H	DIM G	DIM B	DIM A	CONTACT PLATING	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M. MOSTOLIER	22MAR2012		 TE Connectivity	
		CHK M. MOSTOLIER	22MAR2012			
DIMENSIONS:		APVD M. MOSTOLIER	22MAR2012		NAME	
mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	PRODUCT SPEC	ONE PIECE ASSEMBLY			
	0 PLC ± 1 PLC ±0.2 2 PLC ±0.13 3 PLC ± 4 PLC ± ANGLES ± ±	108-133005	LUMAWISE LED HOLDER, SCALABLE			
		APPLICATION SPEC	-			
		114-32043	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
MATERIAL		WEIGHT	A200779		C-2154874	-
FINISH		Customer Drawing		SCALE	SHEET	REV
				3.1	1 OF 2	A1

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
-	-		-	SEE SHEET 1	-	-	-

RECOMMENDED MOUNTING HOLE PATTERN

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M. MOSTOLTER	22MAR2012		TE Connectivity	
		CHK M. MOSTOLTER	22MAR2012			
DIMENSIONS: mm		APVD M. MOSTOLTER	22MAR2012		NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC 108-133005		ONE PIECE ASSEMBLY LUMAWISE LED HOLDER, SCALABLE		
		APPLICATION SPEC 114-32043		RESTRICTED TO		
MATERIAL		WEIGHT		SIZE	CAGE CODE	DRAWING NO
FINISH		-		A2	00779	©-2154874
Customer Drawing				SCALE	3.1	SHEET 2 OF 2
				REV A1		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[3-2154874-2](#)