



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
AJ	16	J	REVISED PER ECO-07-002853	21MAR2007	DW JL

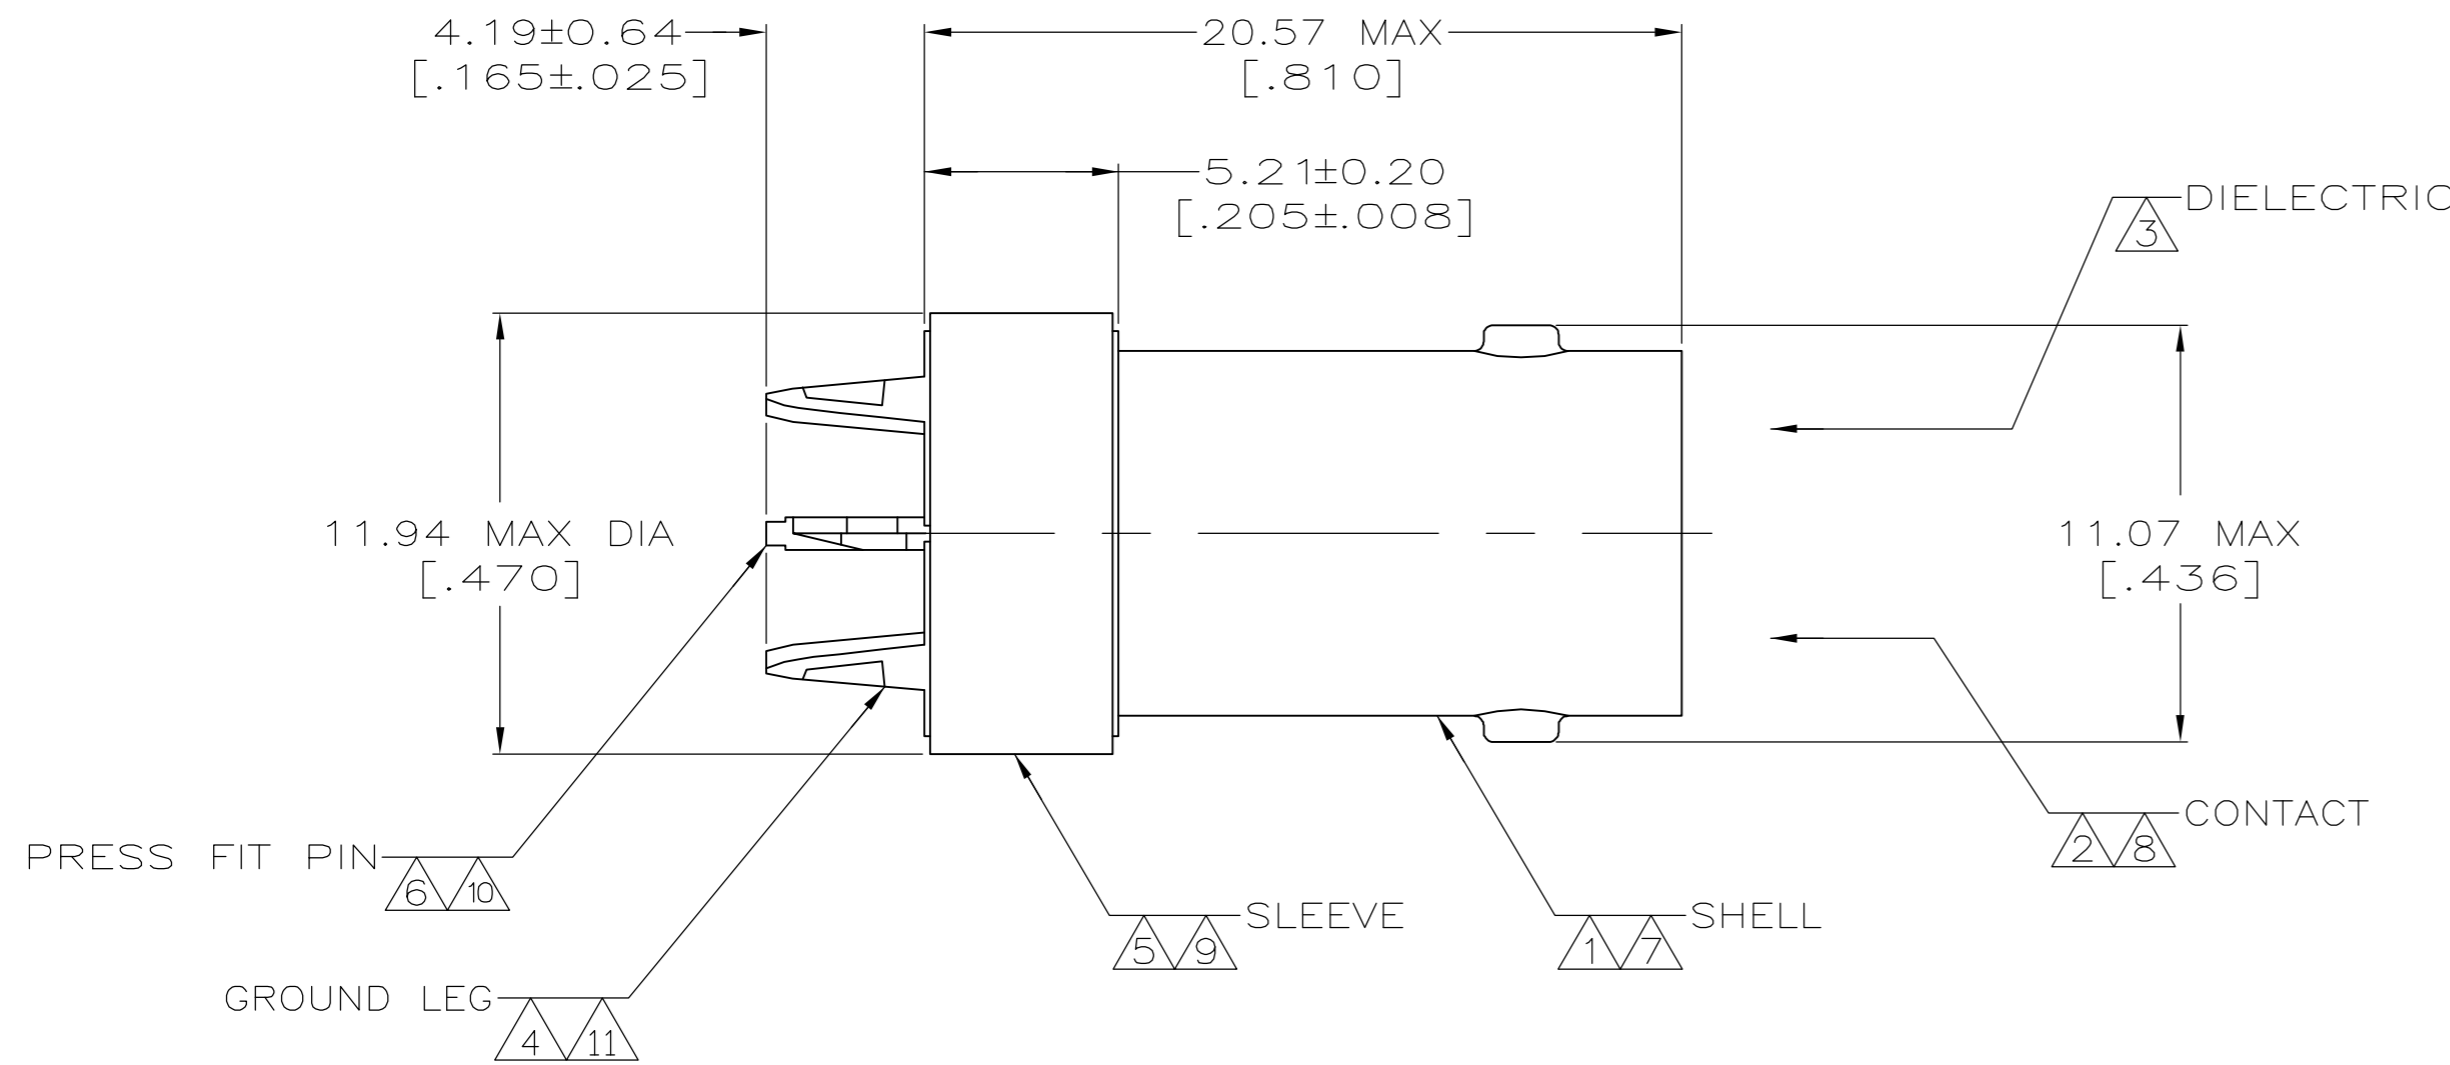

- 1 ZINC PER QQ-Z-363.
- 2 BERYLLIUM COPPER PER ASTM-B-643
- 3 PTFE PER MIL-P-19468.
- 4 COPPER-IRON ALLOY PER ASTM-B-465.
- 5 COPPER PER QQ-C-576.
- 6 COPPER ALLOY PER ASTM-B-122.
- 7 NICKEL PLATE PER QQ-N-290
3.81µm [.000150] MINIMUM THICK.
- 8 GOLD PLATE PER MIL-G-45204
0.76µm [.000030] MINIMUM THICK.
- 9 TIN PLATE PER ASTM-B-545,
2.54 µm [.000100] MIN THICK.
- 10 GOLD PLATE PER MIL-G-45204
- 11 TIN-LEAD PLATE PER ASTM-B-545,
2.54 µm [.000100] MIN THICK.
- 12 CONNECTOR PRESS FIT IS DESIGNED TO PROVIDE 100 LB. MINIMUM AXIAL RETENTION TO PCB COMPLIANT WITH TYCO APPLICATION SPEC 114-12001. AS A RESULT, DEFORMATION OF PLATED THROUGH HOLES WILL OCCUR. CUSTOMER VALIDATION AND ACCEPTANCE OF THIS DEFORMATION IS RECOMMENDED PRIOR TO SPECIFYING USE OF THIS PRODUCT.

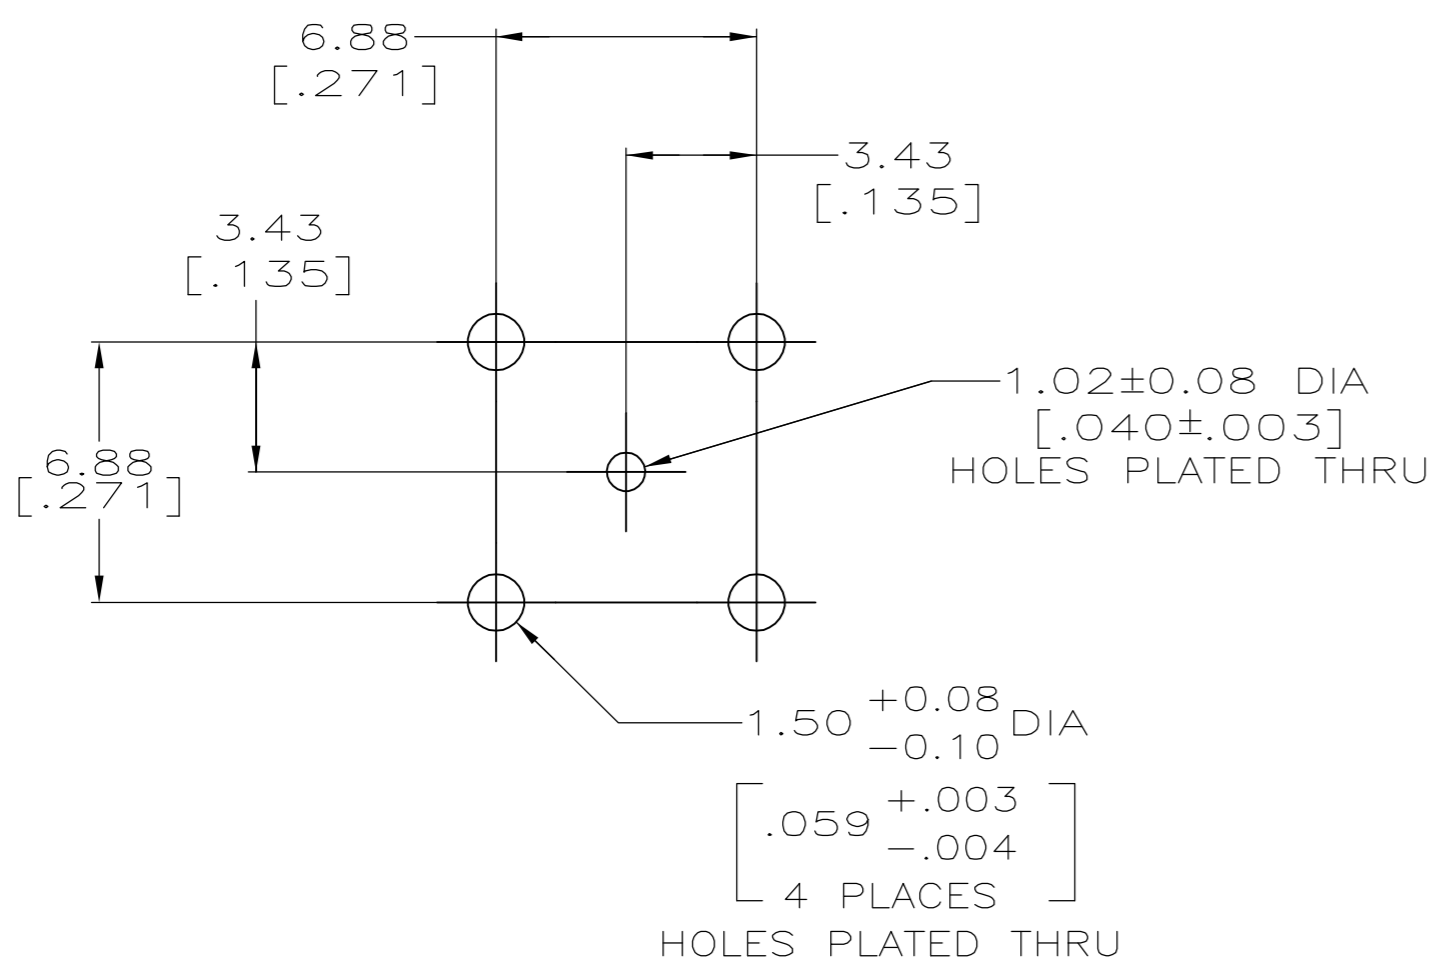

PCB CONFIGURATION

222006-1
 PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. LIPPERT 02AUG93	Tyco Electronics Corporation Harrisburg, PA 17105-3608	
DIMENSIONS: mm		CHK D. TAYLOE 02AUG93		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD D. TAYLOE 02AUG93		
0 PLC ± - 1 PLC ± - 2 PLC ± 0.05 [.002] 3 PLC ± - 4 PLC ± - ANGLES ± -		PRODUCT SPEC 108-12103 APPLICATION SPEC 114-12001		
MATERIAL SEE NOTES 1 THRU 6	FINISH SEE NOTES 7 THRU 10	WEIGHT -	NAME JACK, PCB, HIGH RETENTION PRESS FIT, 50 OHM, BNC	RESTRICTED TO -
CUSTOMER DRAWING		SCALE 5:1	SIZE A2	CAGE CODE 00779
		DRAWING NO C=222006	SHEET 1 of 1	
		REV J		

222006

A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[222006-1](#)