


LOC	DIST	REVISIONS					
AD	47	P	LTR	DESCRIPTION	DATE	DWN	APVD
			E3	REVISED PER ECR-15-012700	28AUG2015	ML	SZ

- 1

MATERIAL: STAINLESS STEEL.
- 2


FINISH: PASSIVATE.
- 3

LOCTITE DRI-LOC 204 APPLIED IN THIS AREA.
4. RECOMMENDED P.C. BOARD DRILLED HOLE DIAMETER IS $4.10\pm0.08\text{mm}$ IF APPLYING A NUT FROM THE REAR OF THE BOARD.
IF USING WITH PEM NUT P/N KFS2-M4, DRILLED HOLE DIAMETER SHOULD BE $6.4\pm0.08\text{mm}$.

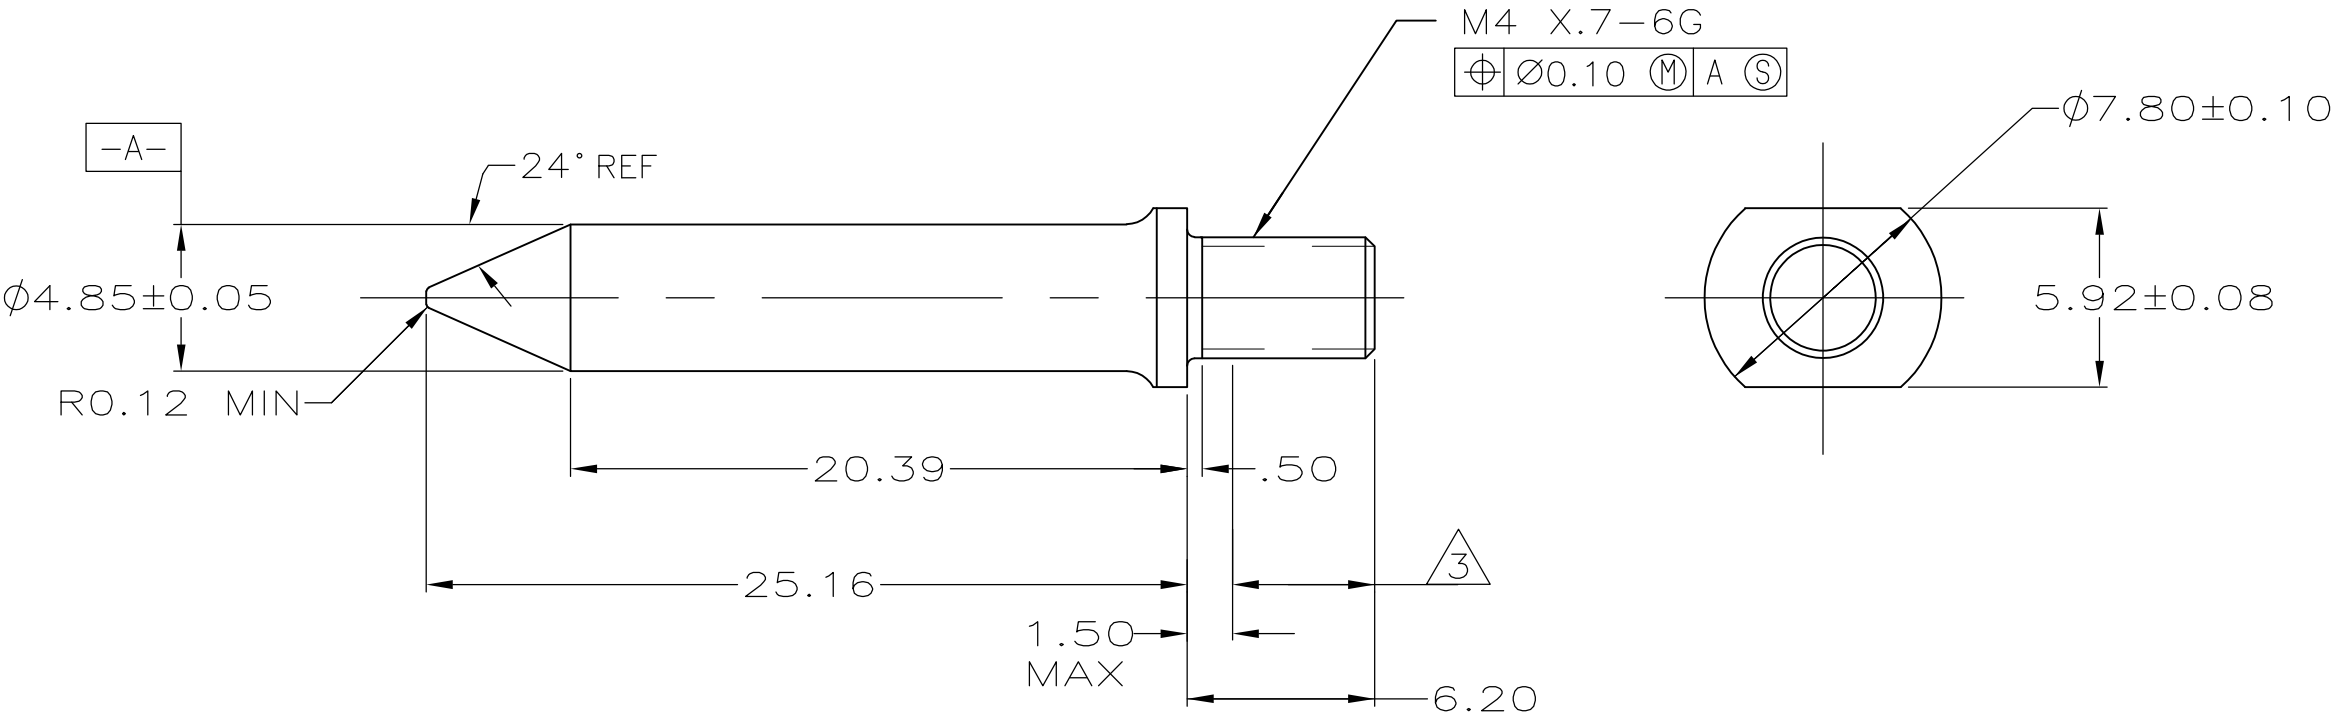

223956-1

PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R.BUCHHEISTER 25/JAN/95		 TE Connectivity			
DIMENSIONS: mm		CHK D.ZITSCH 25/JAN/95					
	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± 0.13 3 PLC ± - 4 PLC ± - ANGLES ± 0° 30'		APVD D.SINISI 25/JAN/95		NAME GUIDE PIN, UNIVERSAL POWER MODULE		
			PRODUCT SPEC —				
			APPLICATION SPEC —				
			WEIGHT —				
MATERIAL 	FINISH  	CUSTOMER DRAWING		SIZE A3	CAGE CODE 00779	DRAWING NO C-223956	RESTRICTED TO —
				SCALE 4:1		SHEET 1 OF 1	REV E3

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[223956-1](#)